


Linear Power MOSFET IXTN30N100L With Extended FBSOA

N-Channel Enhancement Mode




$$V_{DSS} = 1000 \text{ V}$$

$$I_{D25} = 30 \text{ A}$$

$$R_{DS(on)} \leq 0.45 \text{ } \Omega$$

Symbol	Test Conditions	Maximum Ratings
V_{DSS}	$T_J = 25^\circ\text{C}$ to 150°C	1000 V
V_{DGR}	$T_J = 25^\circ\text{C}$ to 150°C ; $R_{GS} = 1 \text{ M}\Omega$	1000 V
V_{GS}	Continuous	± 30 V
V_{GSM}	Transient	± 40 V
I_{D25}	$T_C = 25^\circ\text{C}$	30 A
I_{DM}	$T_C = 25^\circ\text{C}$, pulse width limited by T_{JM}	70 A
I_{AR}	$T_C = 25^\circ\text{C}$	30 A
E_{AR}	$T_C = 25^\circ\text{C}$	80 mJ
E_{AS}	$T_C = 25^\circ\text{C}$	2.0 J
P_D	$T_C = 25^\circ\text{C}$	800 W
T_J		-55 to +150 $^\circ\text{C}$
T_{JM}		150 $^\circ\text{C}$
T_{stg}		-55 to +150 $^\circ\text{C}$
V_{ISOL}	50/60 Hz, RMS, $T = 1 \text{ min}$	2500 V~
	$I_{ISOL} \leq 1 \text{ mA}$, $T = 1 \text{ s}$	3000 V~
M_d	Mounting torque for Base Plate	1.5/13 Nm/lb.in.
	Terminal connection torque	1.3/11.5 Nm/lb.in.
Weight		30 g

miniBLOC, SOT-227 B (IXTN)
E153432



G = Gate D = Drain
S = Source

Either Source terminal S can be used as the Source terminal or the Kelvin Source (gate return) terminal.

Features

- Designed for linear operation
- International standard package
- Molding epoxy meets UL94 V-0 flammability classification
- miniBLOC with Aluminium nitride isolation

Applications

- Programmable loads
- Current regulators
- DC-DC converters
- Battery chargers
- DC choppers
- Temperature and lighting controls

Advantages

- Easy to mount
- Space savings
- High power density

Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		Min.	Typ.	Max.
BV_{DSS}	$V_{GS} = 0 \text{ V}$, $I_D = 1 \text{ mA}$	1000		V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 250 \text{ } \mu\text{A}$	3		V
I_{GSS}	$V_{GS} = \pm 30 \text{ V}$, $V_{DS} = 0 \text{ V}$			± 200 nA
I_{DSS}	$V_{DS} = V_{DSS}$ $V_{GS} = 0 \text{ V}$	$T_J = 25^\circ\text{C}$		50 μA
		$T_J = 125^\circ\text{C}$		1 mA
$R_{DS(on)}$	$V_{GS} = 20 \text{ V}$, $I_D = 0.5 I_{D25}$ Note 1			0.45 Ω

Symbol	Test Conditions	Characteristic Values			
		(T _J = 25°C, unless otherwise specified)			
		Min.	Typ.	Max.	
g _{fs}	V _{DS} = 20 V; I _D = 0.5 • I _{D25} , Note 1	6	10	15	S
C _{iss}	V _{GS} = 0 V, V _{DS} = 25 V, f = 1 MHz		13.7		nF
C _{oss}			980		pF
C _{rss}			115		pF
t _{d(on)}	V _{GS} = 15 V, V _{DS} = 0.5 • V _{DSS} , I _D = 0.5 • I _{D25} R _G = 2 Ω (External),		36		ns
t _r			70		ns
t _{d(off)}			100		ns
t _f			78		ns
Q _{g(on)}	V _{GS} = 20 V, V _{DS} = 0.5 • V _{DSS} , I _D = 0.5 • I _{D25}		545		nC
Q _{gs}			86		nC
Q _{gd}			165		nC
R _{thJC}				0.156	°C/W
R _{thCS}			0.05		°C/W

Safe Operating Area Specification


Symbol	Test Conditions	Min.	Typ.	Max.
SOA	V _{DS} = 600 V, I _D = 0.5 A, T _C = 90°C	300		W

Source-Drain Diode

Symbol	Test Conditions	Characteristic Values		
		(T _J = 25°C, unless otherwise specified)		
		Min.	Typ.	Max.
I _S	V _{GS} = 0 V			30 A
I _{SM}	Repetitive; pulse width limited by T _{JM}			50 A
V _{SD}	I _F = I _S , V _{GS} = 0 V, Note 1			1.5 V
t _{rr}	I _F = I _S , -dt/dt = 100 A/μs, V _R = 100 V		1000	ns

Note 1: Pulse test, t < 300 μs, duty cycle, d ≤ 2 %

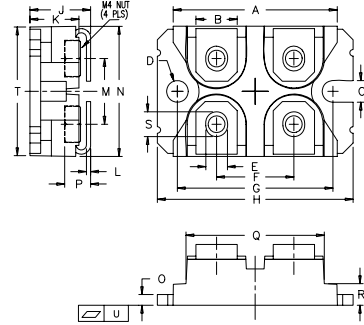SOT-227B (IXTN) Outline



(M4 screws (4x) supplied)

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.240	1.255	31.50	31.88
B	.307	.323	7.80	8.20
C	.161	.169	4.09	4.29
D	.161	.169	4.09	4.29
E	.161	.169	4.09	4.29
F	.587	.595	14.91	15.11
G	1.186	1.193	30.12	30.30
H	1.496	1.505	38.00	38.23
J	.460	.481	11.68	12.22
K	.351	.378	8.92	9.60
L	.030	.033	0.76	0.84
M	.496	.506	12.60	12.85
N	.990	1.001	25.15	25.42
O	.078	.084	1.98	2.13
P	.195	.235	4.95	5.97
Q	1.045	1.059	26.54	26.90
R	.155	.174	3.94	4.42
S	.186	.191	4.72	4.85
T	.968	.987	24.59	25.07
U	-.002	.004	-0.05	0.1

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:

4,835,592	4,931,844	5,049,961	5,237,481	6,162,665	6,404,065 B1	6,683,344	6,727,585	7,005,734 B2	7,157,338 B2
4,850,072	5,017,508	5,063,307	5,381,025	6,259,123 B1	6,534,343	6,710,405 B2	6,759,692	7,063,975 B2	
4,881,106	5,034,796	5,187,117	5,486,715	6,306,728 B1	6,583,505	6,710,463	6,771,478 B2	7,071,537	

Fig. 1. Output Characteristics @ 25°C

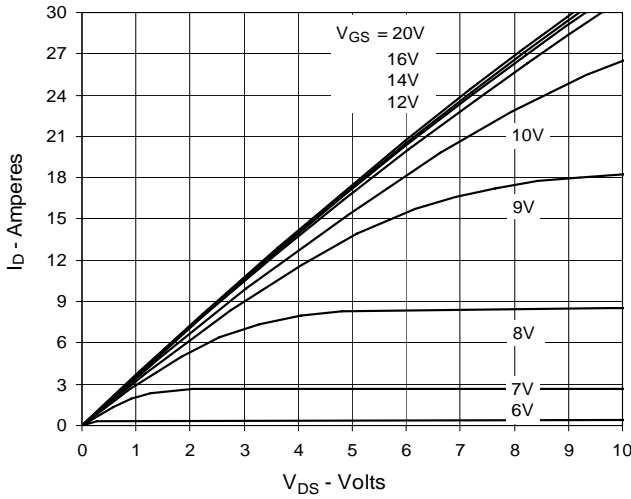


Fig. 2. Extended Output Characteristics @ 25°C

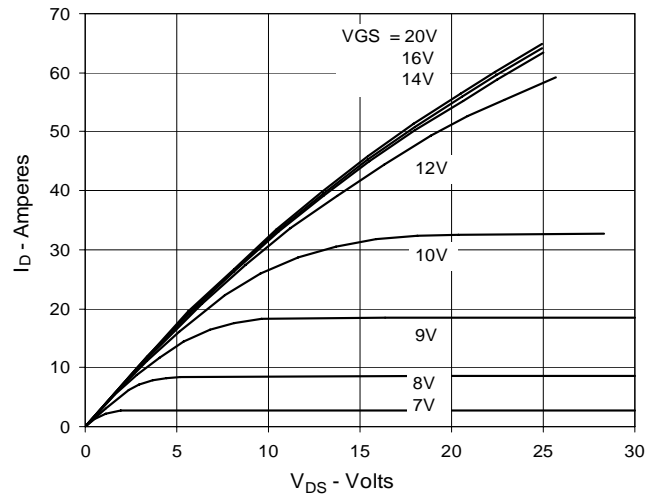


Fig. 3. Output Characteristics @ 125°C

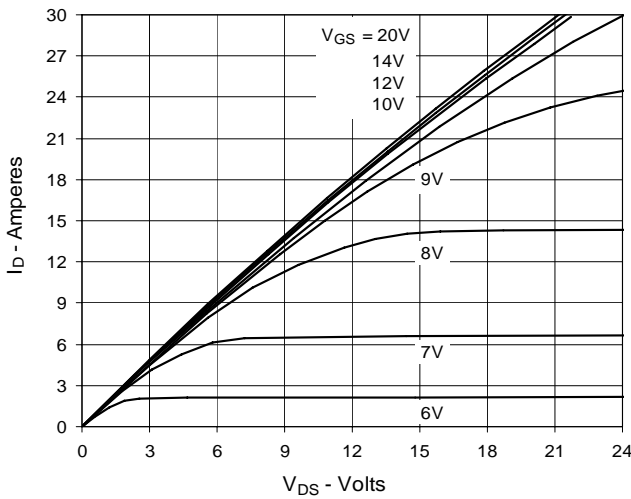


Fig. 4. $R_{DS(on)}$ Normalized to 0.5 I_{D25} Value vs. Junction Temperature

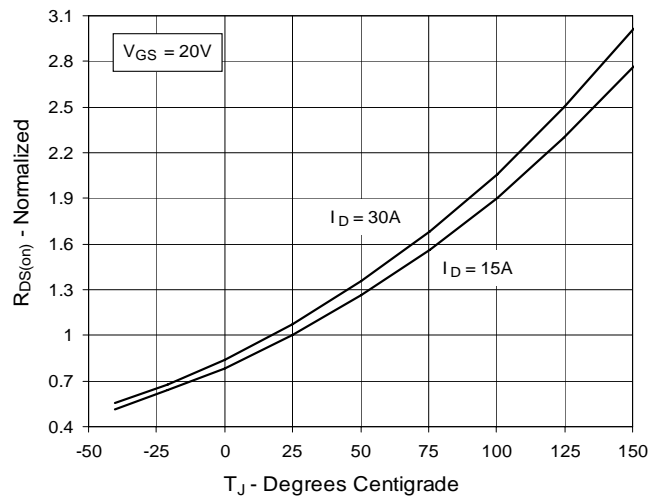


Fig. 5. $R_{DS(on)}$ Normalized to 0.5 I_{D25} Value vs. Drain Current

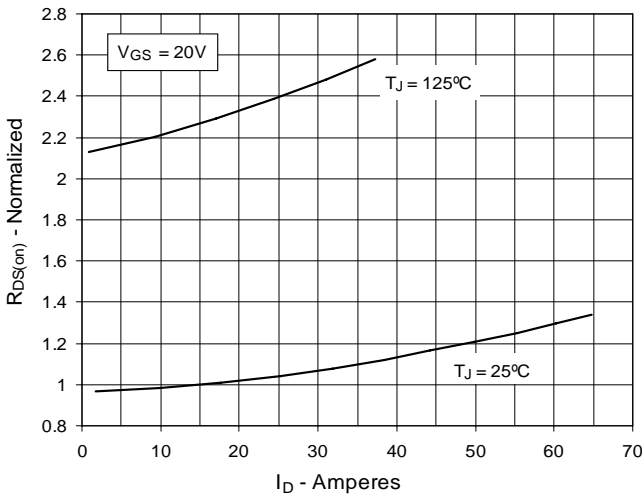


Fig. 6. Maximum Drain Current vs. Case Temperature

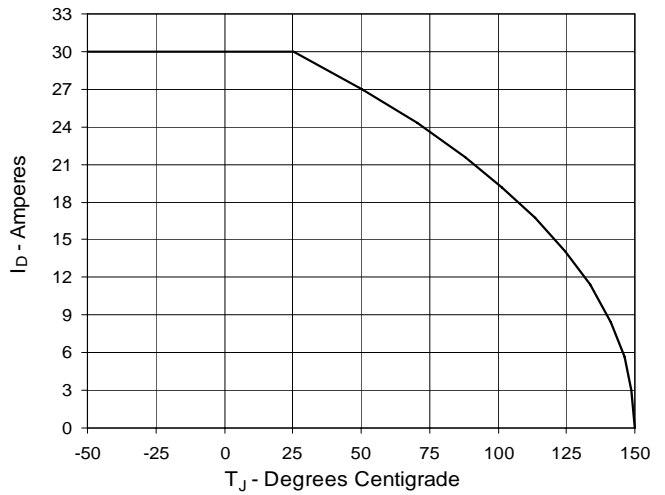


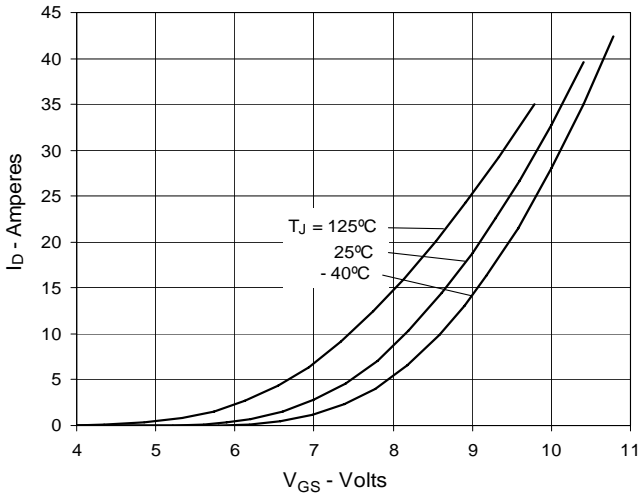
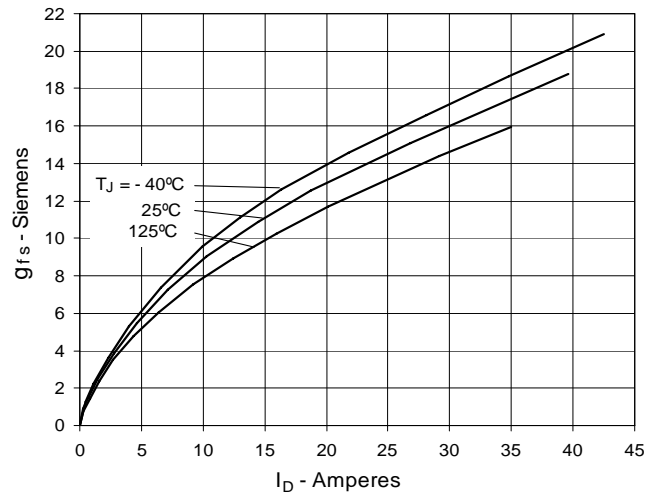
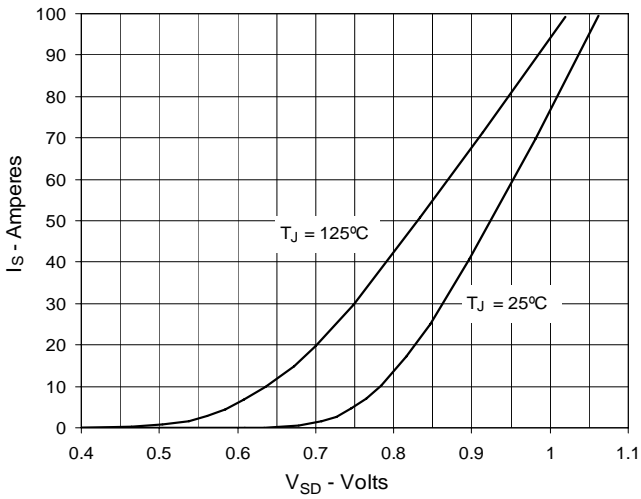
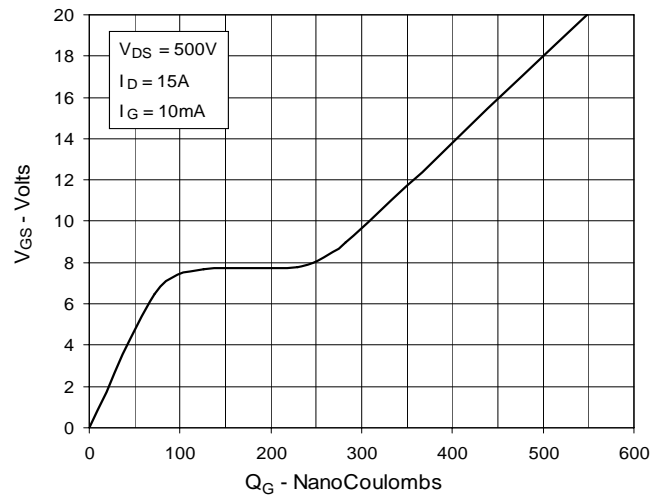
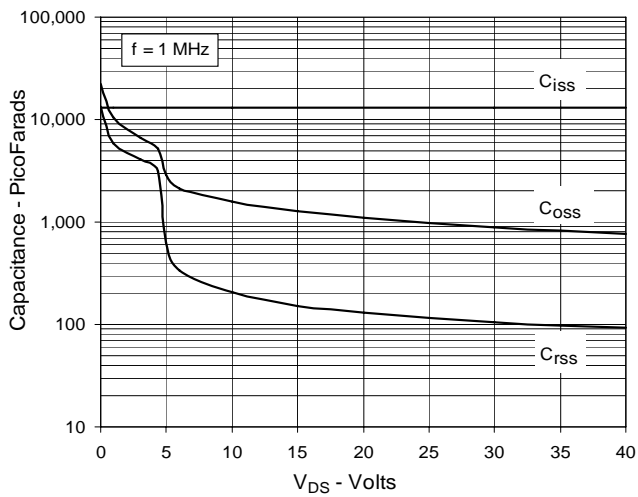
Fig. 7. Input Admittance

Fig. 8. Transconductance

Fig. 9. Forward Voltage Drop of Intrinsic Diode

Fig. 10. Gate Charge

Fig. 11. Capacitance


Fig. 12. Forward-Bias Safe Operating Area
@ $T_C = 25^\circ\text{C}$

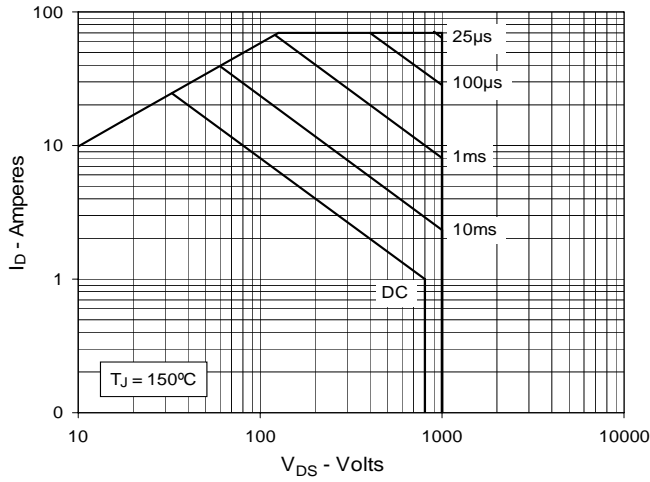


Fig. 13. Forward-Bias Safe Operating Area
@ $T_C = 90^\circ\text{C}$


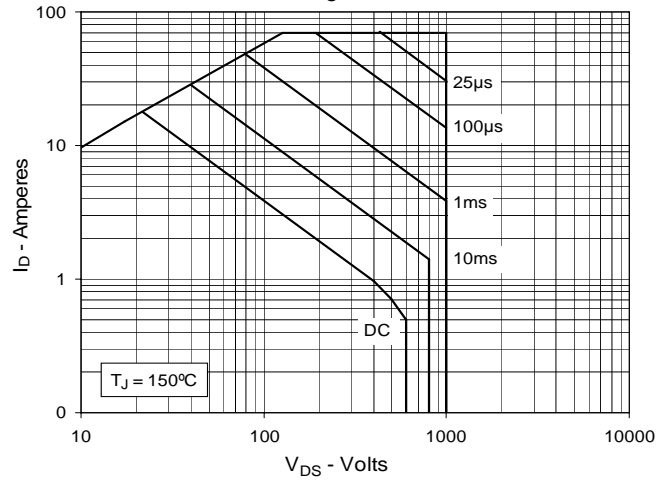


Fig. 14. Maximum Transient Thermal Impedance

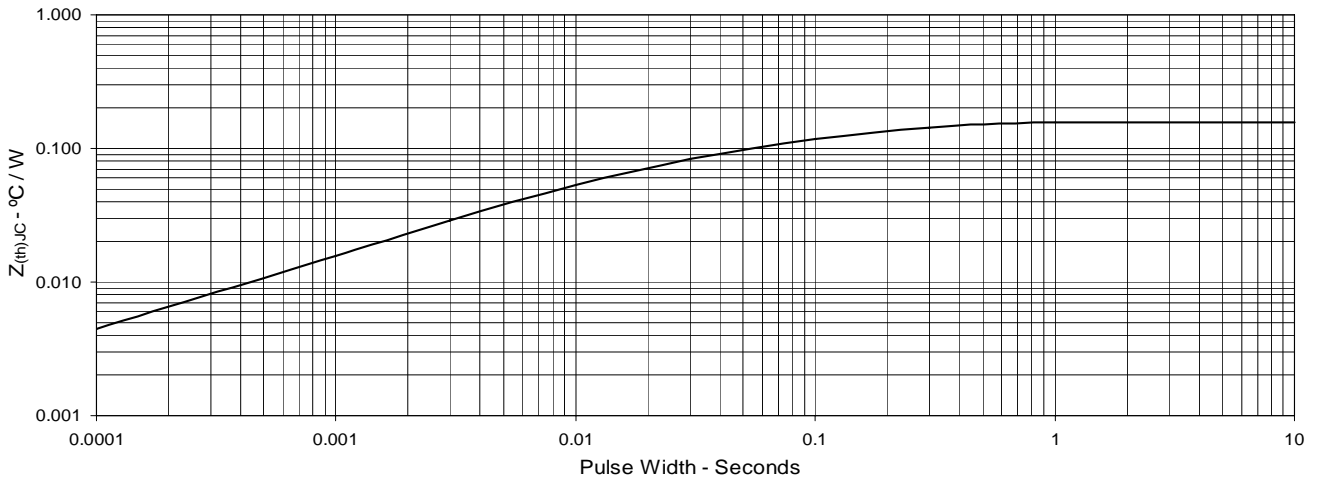

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com