



C14 IEC Inlet - Mini Bezel

MINIMUM COMBINED BEZEL SIZE

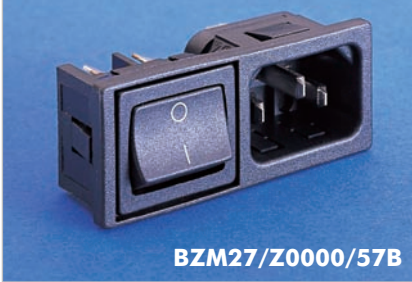

- Inlet with 2.8, 4.8 or 6.3mm tags
- Horizontal Module Arrangement
- Single and Double Pole Switch Variations
- Filtered Inlet Option

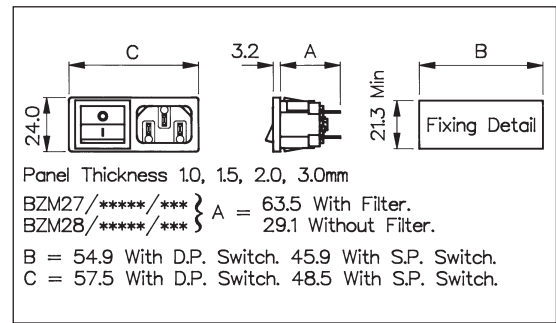

How to Order

BZM xx / xxxxx / xx x

Type of Inlet / Outlet	Filtered or Non Filtered Inlet	Switch Variation	Panel Thickness
C14 Power Inlet (cold condition), 6.3, 4.8 & 2.8mm tabs:  <b>27</b> = PX0575/63 <b>42</b> = PX0575/48* <b>28</b> = PX0575/28  *filter option not available	Z0000 = Non Filtered  Axxxx = Standard  Bxxxx = Medical	Single Pole Switch, 4.8mm or solder tab, marked I/O: <b>53</b> = S.P. Switch, 4.8mm tab (I/O) <b>54</b> = S.P. Switch, solder tab (I/O)  Single Pole Illuminated Switch, 4.8mm or solder tab: <b>55</b> = S.P. Switch Illum. Red, 4.8mm tab <b>61</b> = S.P. Switch Illum. Green, 4.8mm tab <b>56</b> = S.P. Switch Illum. Red, solder tab <b>62</b> = S.P. Switch Illum. Green, solder tab  Double Pole Switch, 4.8mm or solder tab, marked I/O: <b>57</b> = D.P. Switch, 4.8mm tab (I/O) <b>58</b> = D.P. Switch, solder tab (I/O)  Double Pole Illuminated Switch, 4.8mm or solder tab: <b>59</b> = D.P. Switch Illum. Red, 4.8mm tab <b>63</b> = D.P. Switch Illum. Green, 4.8mm tab <b>60</b> = D.P. Switch Illum. Red, solder tab <b>64</b> = D.P. Switch Illum. Green, solder tab  Double Pole High Inrush, 4.8mm tabs: <b>65</b> = D.P. High Inrush Switch, 4.8mm tabs (S.P. format)  Double Pole High Inrush, 4.8mm tabs, marked I/O: <b>68</b> = D.P. High Inrush Switch, 4.8mm tabs, I/O (S.P. format)  Single Pole Illuminated Switch, 4.8mm or solder tab, Marked I/O: <b>A1</b> = S.P. Switch Illum. Red, 4.8mm tab (I/O) <b>A5</b> = S.P. Switch Illum. Green, 4.8mm tab (I/O) <b>A2</b> = S.P. Switch Illum. Red, solder tab (I/O) <b>A6</b> = S.P. Switch Illum. Green, solder tab (I/O)  Double Pole Illuminated Switch, 4.8mm or solder tab, Marked I/O: <b>A3</b> = D.P. Switch Illum. Red, 4.8mm tab <b>A7</b> = D.P. Switch Illum. Green, 4.8mm tab <b>A4</b> = D.P. Switch Illum. Red, solder tab <b>A8</b> = D.P. Switch Illum. Green, solder tab	<b>1.0mm</b> = A  <b>1.5mm</b> = B  <b>2.0mm</b> = C  <b>3.0mm</b> = D

For Filtered inlet use 6th to 9th characters from filter ordering code see pages 125-126.  
  
 E.g. BZM27/**A0120**/57B

Note: For technical details of individual components please see please see page 106

Inlet Approvals:

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)