


max. 56 m³/h

DC axial fans

Series 600 N 60 x 60 x 25 mm

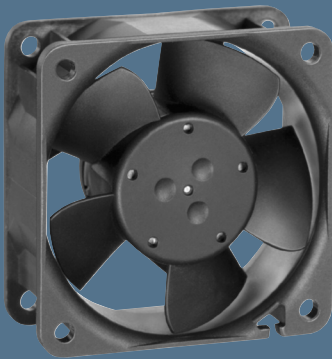



Highlights:

- Ball bearings and sleeve bearings available.
- Some models suitable for use at high ambient temperatures up to 85 °C.

General characteristics:

- Material: fibreglass-reinforced plastic. Impeller PA, housing PBT.
- Fully integrated electronic commutation.
- Protected against reverse polarity and locking.
- Connection via single strands AWG 22, TR 64. Bared and tin-plated.
- Air exhaust over struts. Direction of rotation clockwise, seen on rotor.
- Mass: 66 g.

Nominal data		Air flow	Air flow	Nominal voltage	Voltage range	Sound pressure level	Sound power level	Sinter sleeve bearings Ball bearings	Power input	Nominal speed	Temperature range	Service life L ₁₀ (40 °C) ebm-papst Standard	Service life L ₁₀ (T _{max}) ebm-papst Standard	Life expectancy L ₁₀ Δ (40 °C) see P. 15	Curve	Specials
Type		m ³ /h	CFM	VDC	VDC	dB(A)	Bel(A)	■ / ■	Watts	RPM	°C	Hours	Hours	Hours	P. 110-118	
612 NGLE		21	12,4	12	8...15	16	3,6	■	0,6	2 500	-20...+85	80 000 / 27 500	160 000	160 000	1	
612 NLE		21	12,4	12	8...15	16	3,6	■	0,4	2 500	-20...+85	80 000 / 27 500	160 000	160 000	1	
612 NGMLE		25	14,7	12	8...15	19	3,9	■	0,7	3 000	-20...+80	80 000 / 32 500	160 000	160 000	2	
612 NMLE		25	14,7	12	8...15	19	3,9	■	0,4	3 000	-20...+85	80 000 / 27 500	160 000	160 000	2	
612 NGME		35	20,6	12	8...15	28	4,6	■	1,2	4 100	-20...+75	80 000 / 35 000	160 000	160 000	3	
612 NME		35	20,6	12	8...15	28	4,6	■	0,8	4 100	-20...+75	80 000 / 35 000	160 000	160 000	3	/2
612 NN		42	24,7	12	8...15	35	5,0	■	1,6	5 100	-20...+70	70 000 / 35 000	140 000	140 000	4	
612 NH		46	27,1	12	8...15	37	5,3	■	2,0	5 600	-20...+70	70 000 / 35 000	140 000	140 000	5	/2
612 NHH-118		56	33,0	12	8...15	41	5,7	■	2,9	6 800	-20...+70	60 000 / 30 000	120 000	120 000	6	/2
614 NGL		21	12,4	24	18...28	16	3,6	■	1,0	2 500	-20...+70	80 000 / 40 000	160 000	160 000	1	
614 NL		21	12,4	24	18...28	16	3,6	■	0,9	2 500	-20...+70	80 000 / 40 000	160 000	160 000	1	/2
614 NGML		25	14,7	24	18...28	19	3,9	■	1,2	3 000	-20...+70	80 000 / 40 000	160 000	160 000	2	/2
614 NML		25	14,7	24	18...28	19	3,9	■	1,0	3 000	-20...+70	80 000 / 40 000	160 000	160 000	2	
614 NGM		35	20,6	24	18...28	28	4,6	■	1,7	4 100	-20...+70	80 000 / 40 000	160 000	160 000	3	/12
614 NM		35	20,6	24	18...28	28	4,6	■	1,4	4 100	-20...+70	80 000 / 40 000	160 000	160 000	3	/2/39
614 NN		42	24,7	24	18...28	35	5,0	■	1,8	5 100	-20...+70	70 000 / 35 000	140 000	140 000	4	
614 NH		46	27,1	24	18...26	37	5,3	■	2,1	5 600	-20...+70	70 000 / 35 000	140 000	140 000	5	/2
614 NHH		56	33,0	24	18...26	41	5,7	■	3,0	6 850	-20...+70	60 000 / 30 000	120 000	120 000	6	
614 NHH-119		56	33,0	24	18...28	41	5,7	■	3,0	6 850	-20...+70	60 000 / 30 000	120 000	120 000	6	/2
618 NM		35	20,6	48	36...56	28	4,6	■	1,4	4 100	-20...+70	80 000 / 40 000	160 000	160 000	3	
618 NN		42	24,7	48	36...56	35	5,0	■	2,1	5 100	-20...+65	70 000 / 40 000	140 000	140 000	4	/2/12/39

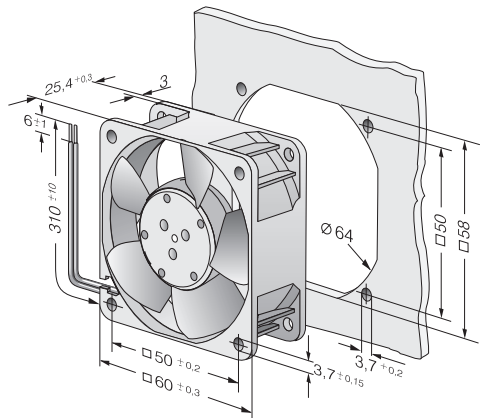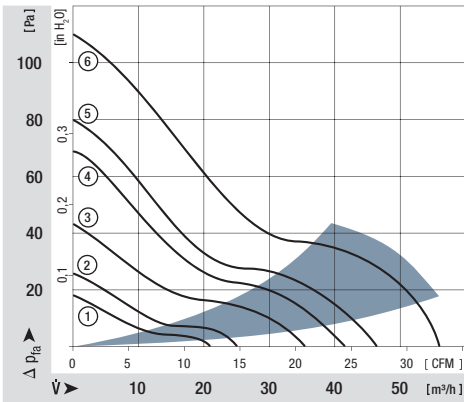

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com