


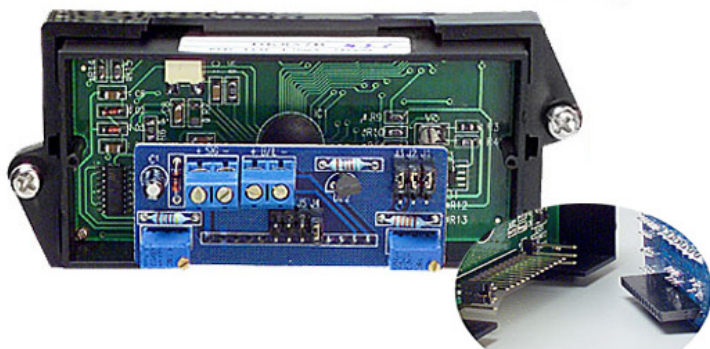

Features:

- ◇ Large 1", 3½ digit display for easy viewing.
- ◇ Decimal point user selectable
- ◇ Engineering units user selectable
- ◇ Non-backlit LCD or choice of AMBER, GREEN, RED or BLUE backlit LCD
- ◇ Wide ZERO (Offset) & SPAN (Gain) adjustment
- ◇ Standard 1 DIN package
- ◇ Snap-in panel mounting
- ◇ Gasket and clamp provided for NEMA 4, NEMA 12, & IP66 applications

Specifications:

Display:	Digits:	3 ½ digits (±1999 counts)
	Type:	1" (24.9 mm) 7 segment high contrast LCD
	Polarity:	automatic, "-" displayed
	Annunciators:	°F, °C, PSI, %, user selectable, V, A, KW, PF
	Decimal Points:	3 position, user selectable
	Overrange:	three lower order digits blank for inputs >1999 & < -1999
Inputs:	Voltage Ranges:	200 mV, 5 V, 10 V (809 Series)
	Current Range:	4 to 20mA (807 Series)
	Configuration:	single ended (809 Series)
	Impedance:	390KΩ (809 Series)
Performance:	Accuracy:	±(0.05% of full scale + 1 count)
	Conversion Rate:	3 per second
	Normal Mode Rejection:	>30 dB @ 60 Hz
	Warmup:	10 minutes typical
	Temperature Coefficient:	± 100 ppm per °C typical
Adjustments:		25 turn potentiometers
	Offset Range:	-1999 to +1999
	Gain Range:	1 to 1999 (custom ranges available)
Environment:	Operating Range:	-10 to 50 °C
	Storage Range:	-40 to 75 °C
Power Supply:	Loop Powered:	300Ω nominal at 20 mA (807 series)
	Voltage Controlled:	10 mA at 12 V (9 to 16 V) or 24 V (16 to 32 V) (809 series)
	Backlighting:	35 mA typical @ 24 VDC
Mounting:		snap-in panel mount or clamp and gasket (included)
Connection:		screw terminals


Ordering Information:

PART NUMBER	 BACKLIGHT COLOR	 METER INPUT	 METER POWER	 BACKLIGHT POWER
DK807A*	 NO BACKLIGHT	 4-20mA	 mA loop	 NONE
DK757B*	 BLUE	 4-20mA	 mA loop	 24VDC
DK857B*	 RED	 4-20mA	 mA loop	 24VDC
DK947B*	 AMBER	 4-20mA	 mA loop	 24VDC
DK957B*	 GREEN	 4-20mA	 mA loop	 24VDC
DK809*	 NO BACKLIGHT	 Voltage	 12/24VDC	 NONE
DK759*	 BLUE	 Voltage	 12/24VDC	 24VDC
DK859*	 RED	 Voltage	 12/24VDC	 24VDC
DK949*	 AMBER	 Voltage	 12/24VDC	 24VDC
DK959*	 GREEN	 Voltage	 12/24VDC	 24VDC

*Add (P) for Power Engineering Units V, A, KW, PF

PW2-12.....	Regulated 120V AC to 12V DC Power Supply
PW2-24.....	Regulated 120V AC to 24V DC Power Supply
PW1.0.....	24V AC to adjustable DC output
CPW1.5.....	24V AC to adjustable DC output
CVC.....	Calibrator

Dimensions

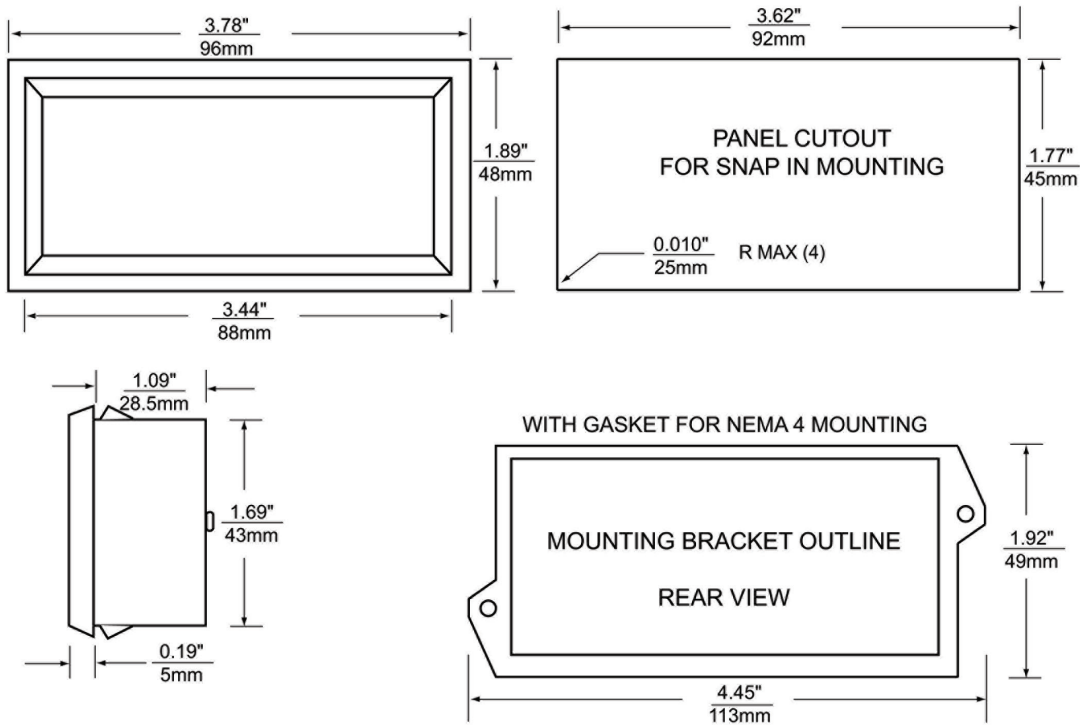



NOTES:

1. Panel thickness is: 0.032"/0.81mm to 0.25"/6.35mm
2. Gasket supplied is: 0.075"/1.9mm thick

Wiring


807 Series

1. DECIMAL SELECTION:

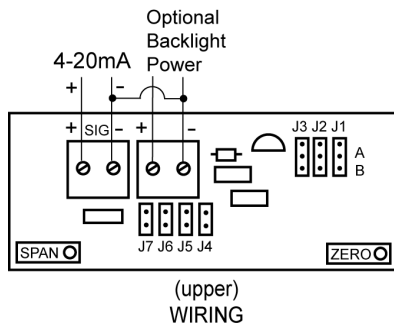


2. J1, J2, J3 SELECTION:



- IF:** OFFSET (ZERO) IS ≤ 0 or
OFFSET (ZERO) > 0 and GAIN (SPAN) + OFFSET (ZERO) ≥ 5




- IF:** OFFSET (ZERO) > 0 and GAIN (SPAN) + OFFSET (ZERO) < 5



NOTE: If backlight supply is not loop supply, ground should be referenced together.

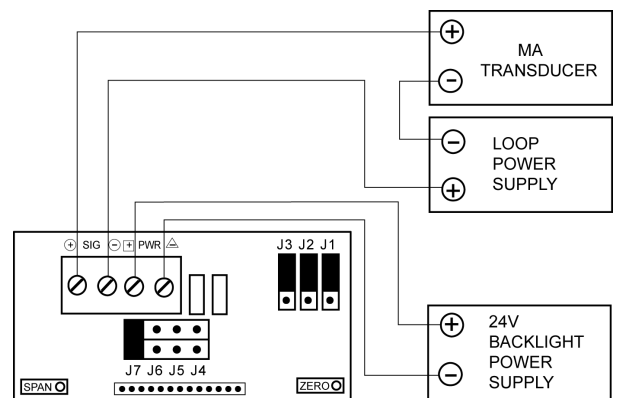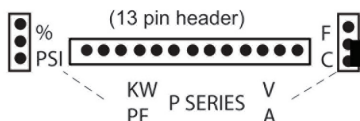

809 Series

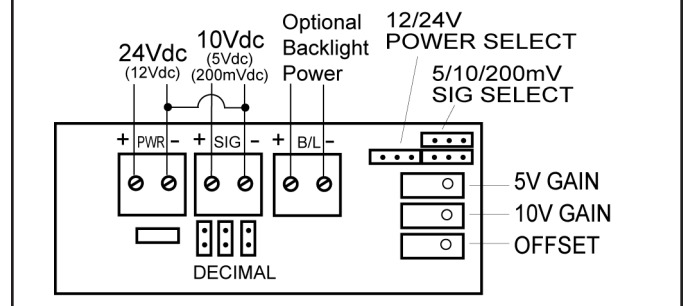



Features:

- ◇ Large, 0.8", 3½ digit, GREEN or RED display for easy viewing
- ◇ Standard 1 DIN package
- ◇ Decimal point user selectable
- ◇ Snap-in panel mounting - no tools or hardware required
- ◇ Gasket and clamp provided for NEMA4, NEMA12, & IP66 applications

Specifications:

Display:	Digits:	3 ½ digits (±1999 counts)
	Type:	0.8" (20.3 mm) LED
	Polarity:	automatic, "-" displayed.
	Decimal Points:	3 position, user selectable
Inputs:	Overrange:	three lower order digits blank for inputs >1999 & < -1999
	Hold:	display hold function is standard
	Ranges:	±200.0 mV, ±2.000 V, ±20.00 VDC
	Configuration:	bipolar, differential
Performance:	Protection:	±350 VDC, (±100 VDC on 200 mV range)
	Impedance:	>1 MΩ, (>10 MΩ on 200 mV range)
	Accuracy:	±(0.05% FS +1 counts)
	Conversion Rate:	3 per second
Environment:	Normal Mode Rejection:	>30 dB @ 60 Hz
	Common Mode Range:	±1V DC
	Common Mode Rej.:	>86 dB
	Zero Adjustment:	automatic
Power Supply:	Warmup:	10 minutes typical
	Temperature Coefficient:	±100 ppm per °C typical
	Operating Range:	-10 to 50 °C
	Storage Range:	-40 to 75 °C
Mounting:		±5V DC (± 5%) 180 mA @ 5 V
Connection:		13 pin male connection

Ordering Information:

PART NUMBER	METER COLOR	METER INPUT
DK851A	RED	200mV
DK852A	RED	2V
DK853A	RED	20V
DK951A	GREEN	200mV
DK952A	GREEN	2V
DK953A	GREEN	20V

J4C13	13 Pin Connector / Wire Assembly
PW2-5	Regulated 120V AC to 5V DC Power Supply
PW1.0	24V AC to adjustable DC output
CPW1.5	24V AC to adjustable DC output
CVC	Calibrator

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com