

Ceramic SMD Crystal



Model: FX532 Series

RoHS Compliant / Pb Free

Rev. 6/5/2008

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm



FEATURES

- Low Cost
- Fundamental to 67 MHz
- Resin Sealed (A Version)
- Seam Sealed (B Version)
- Tape and Reel (2,000 pcs. STD)

OPTIONS

- Tolerances to < 10 PPM (B Version)
- Stabilities to < 10 PPM (B Version)
- Temperatures to -40°C ~ +85°C

• PART NUMBER SELECTION [Learn More](#) - Internet Required

Part Number	Model Number	Frequency Range (MHz)
419-Frequency-xxxxx	FX532A	10.000 ~ 67.000
495-Frequency-xxxxx	FX532B	10.000 ~ 67.000

• STANDARD SPECIFICATIONS¹


PARAMETERS	MAX (unless otherwise noted)
Frequency Range	10.000 ~ 67.000 MHz
Frequency Tolerance, Ta=25°C	
10.000 ~ 40.000 MHz	±50PPM
40.000+ ~ 67.000 MHz	See Stability
Frequency Stability	
10.000 ~ 40.000 MHz (ref. @ 25°C)	±50 PPM
40.000+ ~ 67.000 MHz	±100 PPM ²
Temperature Range	
Operating (TOPR)	-10°C ~ +60°C
Storage (TSTG)	-30°C ~ +85°C
Shunt Capacitance (Co)	7.0 pF
Load Capacitance (CL)	10 pF ~ Series (Customer Specified)
Drive Level	0.1 mW
Aging per year	±5 PPM

¹ Other tolerances, stabilities & operating temperature ranges available. Consult Fox Customer Service for specific requirements.

² Inclusive of tolerance at 25°C

All specifications subject to change without notice.

Note: Dimensional drawing is for reference to critical specifications defined by size measurements. Certain non-critical visual attributes, such as side castellations, etc. may vary. The above specifications, having been carefully prepared and checked, is believed to be accurate at the time of publication; however, no responsibility is assumed by Fox Electronics for inaccuracies.

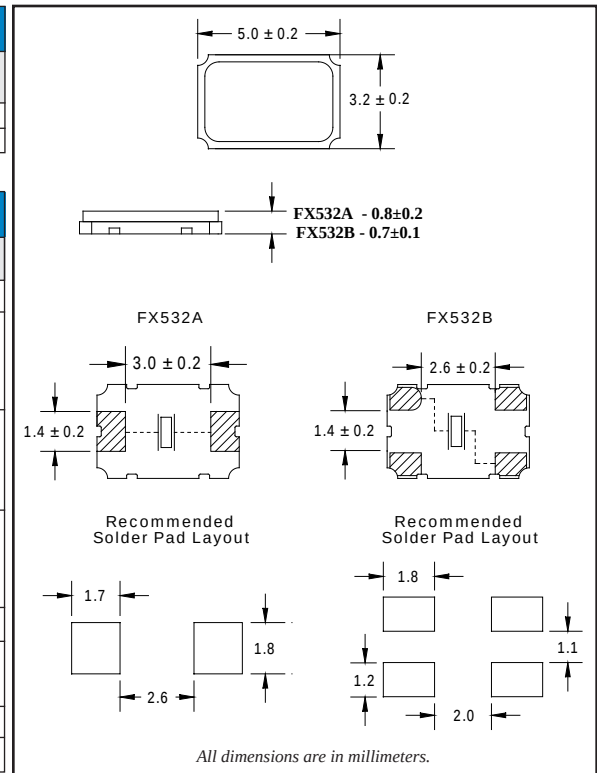

Frequency Range (MHz)	Operating Mode	Max ESR Ω
10.000 ~ 14.000	Fundamental	140
14.000+ ~ 16.000	Fundamental	90
16.000+ ~ 67.000	Fundamental	60

Ceramic SMD Crystal



Model: FX532 Series

RoHS Compliant / Pb Free

Rev. 6/5/2008



Page 2 of 2

http://www.foxonline.com/need_a_sample.htm



• TAPE SPECIFICATIONS (millimeters)							
MODEL	A	B	C	D	E	F	STD Reel QTY
FX532 Series	Ø1.5	4.0	8.0	5.5	12.0	1.7	2,000

• REEL SPECIFICATIONS (millimeters)							
MODEL	G	H	I	J	K	L	M
FX532 Series	2.0	Ø13	21	Ø80	Ø250	13.5	2.0

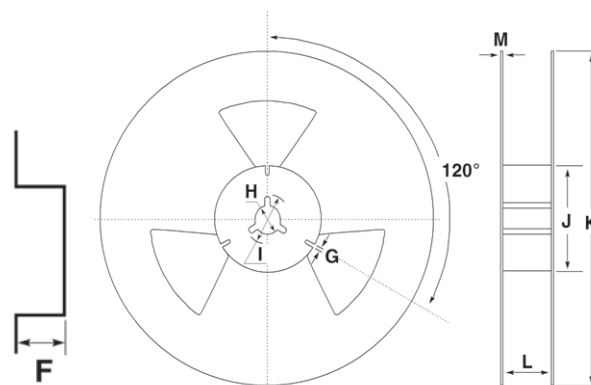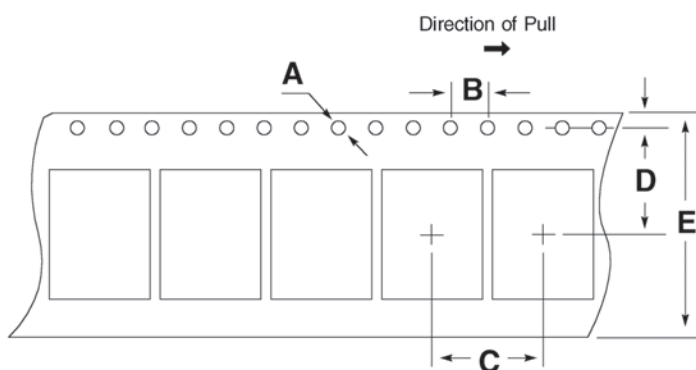

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com