
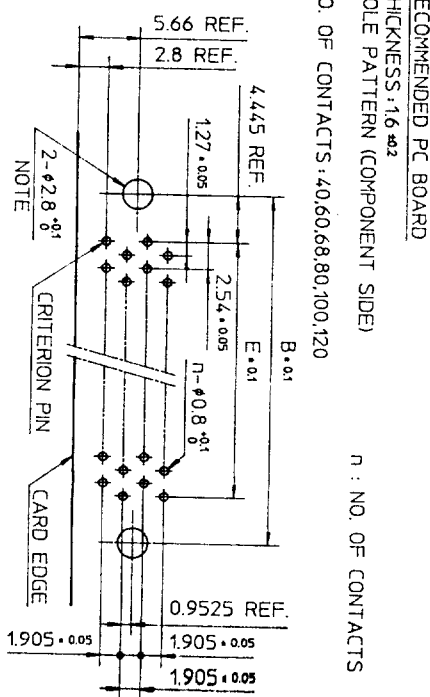

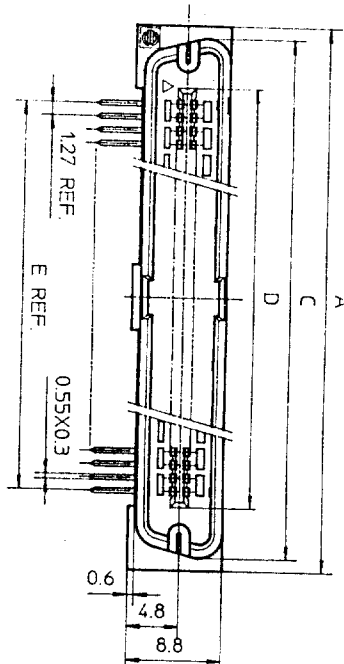


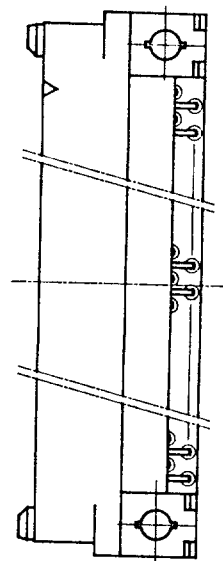



NO. OF CONTACTS: 40, 60, 68, 80, 100, 120
CRITERION PIN

NO. OF CONTACTS: 30, 34, 50

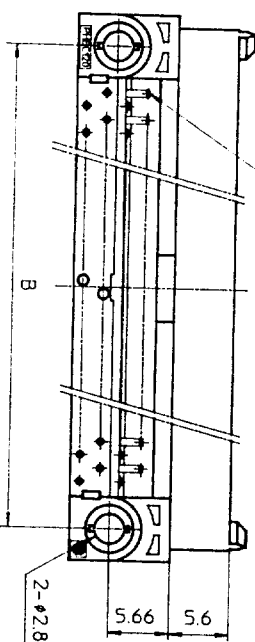

MATERIAL

BODY

: NYLON RESIN GLASS REINFORCED (UL94V-0)

LOCATOR

: PBT RESIN GLASS REINFORCED (UL94V-0)

COLOR

: BLACK

CONTACT

: COPPER ALLOY

MOUNTING LATCH

: PHOSPHOR BRONZE

SCREW NUT

: STEEL

NICKEL PLATED

RECOMMENDED PC BOARD

THICKNESS: 1.6 ±0.2

HOLE PATTERN (COMPONENT SIDE)

NO. OF CONTACTS: 40, 60, 68, 80, 100, 120

n : NO. OF CONTACTS

TOLERANCES
UNLESS OTHERWISE SPECIFIED: ±0.3

CAT. NO.	NO. OF CONTACTS (MATING SIDE)	DIMENSIONS				
		A	B	C	D	E
PHEC30P-R21	15/ROW X 2 ROWS	32.67	26.67	30.3	20.42	17.78
PHEC34P-R21	17/ROW X 2 ROWS	35.21	29.21	32.84	22.96	20.32
PHEC40P-R21	20/ROW X 2 ROWS	39.02	33.02	36.65	26.77	24.13
PHEC50P-R21	25/ROW X 2 ROWS	45.37	39.37	43	33.12	30.48
PHEC60P-R21	30/ROW X 2 ROWS	51.72	45.72	49.35	39.47	36.83
PHEC68P-R21	34/ROW X 2 ROWS	56.8	50.8	54.43	44.55	41.91
PHEC80P-R21	40/ROW X 2 ROWS	64.42	58.42	62.05	52.17	49.53
PHEC100P-R21	50/ROW X 2 ROWS	77.12	71.12	74.75	64.87	62.23
PHEC120P-R21	60/ROW X 2 ROWS	89.82	83.82	87.45	77.57	74.93

CONTACT PLATING TABLE

(THICKNESS: μm)

CONTACT AREA	REMAINDER
GOLD 0.25 MIN	SOLDER
OVER NICKEL 32	OVER NICKEL





PRINTED CIRCUIT CONNECTOR

CAT. NO.	PHEC___P-R21_
DRAWING NO.	JSC 90736
REV	3
BURNDY JAPAN Ltd.	

DESIGNED	M. Oga
DRAWN	4.86
CHECKED	J. Ogata
APPROVED	Mar. 8, 1990
DATE	

SCALE	mm
DIM. IN	mm
MATERIAL	

REV	DATE	DESCRIPTION	CHKD
1	92-8-14	30,34,50,68 POSITIONS ADDED. LOCATOR MATERIAL ADDED.	
2	90-6-7	EC 7866	
3	90-4-20	EC 7837	

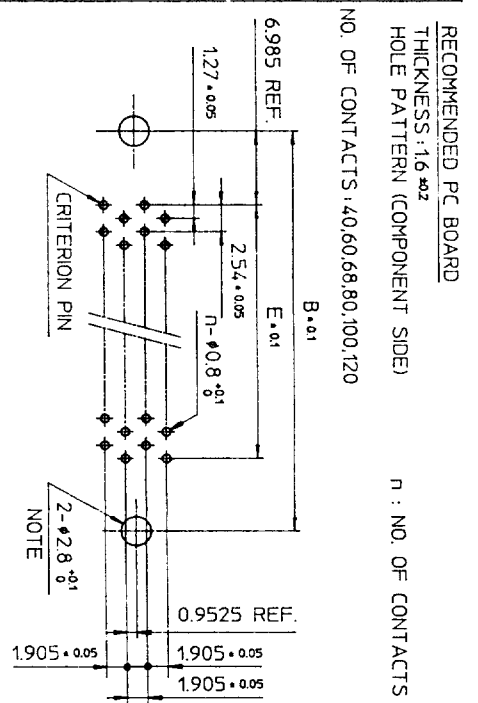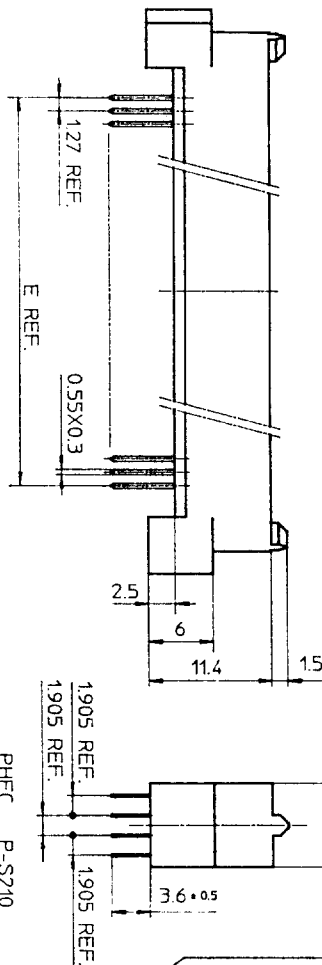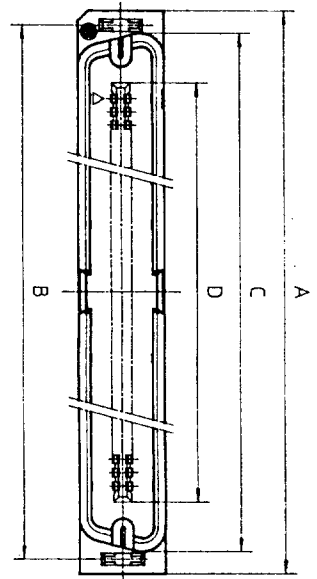

TOLERANCES
UNLESS OTHERWISE SPECIFIED: ±0.3

CAT. NO.	NO. OF CONTACTS (MATING SIDE)	DIMENSIONS				
		A	B	C	D	E
PHEC30P-S21	15/ROW X 2 ROWS	34.55	31.75	30.3	20.42	17.78
PHEC34P-S21	17/ROW X 2 ROWS	37.09	34.29	32.84	22.96	20.32
PHEC40P-S21	20/ROW X 2 ROWS	40.9	38.1	36.65	26.77	24.13
PHEC50P-S21	25/ROW X 2 ROWS	47.25	44.45	43	33.12	30.48
PHEC60P-S21	30/ROW X 2 ROWS	53.6	50.8	49.35	39.47	36.83
PHEC68P-S21	34/ROW X 2 ROWS	58.68	55.88	54.43	44.55	41.91
PHEC80P-S21	40/ROW X 2 ROWS	66.3	63.5	62.05	52.17	49.53
PHEC100P-S21	50/ROW X 2 ROWS	79.0	76.2	74.75	64.87	62.23
PHEC120P-S21	60/ROW X 2 ROWS	91.7	88.9	87.45	77.57	74.93

MATERIAL

INSULATOR: NYLON RESIN GLASS REINFORCED (UL94V-0)

COLOR: BLACK

CONTACT: COPPER ALLOY

MOUNTING LATCH: PHOSPHOR BRONZE

SOLDER PLATED

CONTACT PLATING TABLE

CONTACT AREA	REMAINDER
GOLD 0.25 MIN	SOLDER
OVER NICKEL 3Z	OVER NICKEL

DRAWING NO
JSC 90735

PRINTED CIRCUIT CONNECTOR

CAT. NO.
PHEC-P-S21

DRAWING NO.
JSC 90735

BURNDY
JAPAN, Ltd.

DESIGNED

DRAWN

CHECKED

APPROVED

DATE

SCALE


DIM IN

MATERIAL



REV	DATE	DESCRIPTION	CHK
1	8-11	30,34,50,68 POSITIONS ADDED.	
2	6-5	EC 7866	
1	4-20	EC 7837	

REFERENCE

Mar. 8, 1990

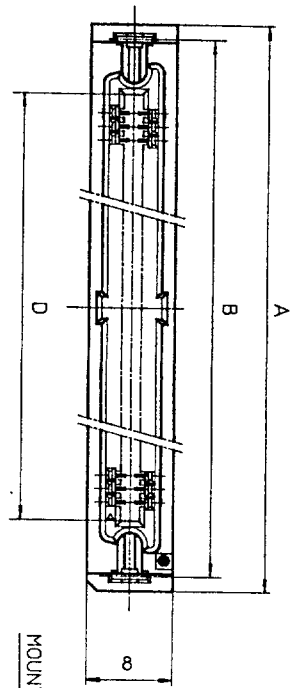


PHEC...R-S211

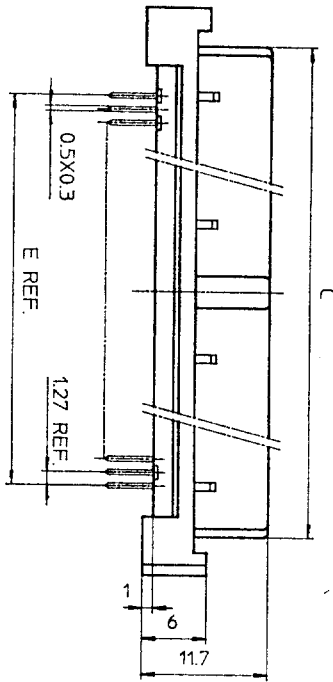

PHEC...R-S210

RECOMMENDED PC BOARD
THICKNESS: 1.6 ± 0.2
HOLE PATTERN (COMPONENT SIDE)
NO. OF CONTACTS: 40, 60, 80, 100, 120
N: NO. OF CONTACTS

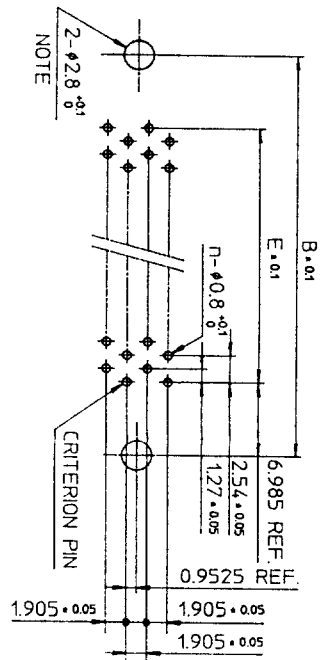


NO. OF CONTACTS: 30, 34, 50

NOTE
THROUGH-HOLES FOR MOUNTING LATCHES ALSO SHOULD BE PLATED.


CRITERION PIN

NO. OF CONTACTS: 40, 60, 80, 100, 120



CRITERION PIN

NO. OF CONTACTS: 30, 34, 50



MATERIAL

INSULATOR: PBT RESIN GLASS REINFORCED (UL94V-0)

COLOR: BLACK

CONTACT: PHOSPHOR BRONZE

MOUNTING LATCH: PHOSPHOR BRONZE
SOLDER PLATED

CONTACT PLATING TABLE

(THICKNESS: μm)

CONTACT AREA	REMAINDER
GOLD 0.25 MIN. OVER NICKEL 3.2	SOLDER OVER NICKEL

TOLERANCES
UNLESS OTHERWISE SPECIFIED: ±0.3

CAT. NO.	NO. OF CONTACTS (MATING SIDE)	DIMENSIONS				
		A	B	C	D	E
PHEC30R-S21	15/ROW X 2 ROWS	34.55	31.75	27.26	21.26	17.78
PHEC34R-S21	17/ROW X 2 ROWS	37.09	34.29	29.8	23.8	20.32
PHEC40R-S21	20/ROW X 2 ROWS	40.9	38.1	33.61	27.61	24.13
PHEC50R-S21	25/ROW X 2 ROWS	47.25	44.45	39.96	33.96	30.48
PHEC60R-S21	30/ROW X 2 ROWS	53.6	50.8	46.31	40.31	36.83
PHEC68R-S21	34/ROW X 2 ROWS	58.68	55.88	51.39	45.39	41.91
PHEC80R-S21	40/ROW X 2 ROWS	66.3	63.5	59.01	53.01	49.53
PHEC100R-S21	50/ROW X 2 ROWS	79.0	76.2	71.71	65.71	62.23
PHEC120R-S21	60/ROW X 2 ROWS	91.7	88.9	84.41	78.41	74.93

PRINTED CIRCUIT CONNECTOR

CAT. NO.

PHEC...R-S21

DRAWING NO.

JSC 90737

REV

4

BURNDY
JAPAN, Ltd.

DESIGNED

DRAWN

CHECKED

APPROVED

DATE

M. Oba

4. Ebi

T. Koyachi

Mar. 8, 1990

SCALE




DIM. IN

MATERIAL


mm

REV	DATE	DESCRIPTION	CKD
93	1-29	WRONG CONTACT DIM. CORRECTED.	
92	3-8-11	30,34,50,68 POSITIONS ADDED	No. 5.9
90	5-30	EC 7866	No. JK
90	4-20	EC 7837	No. JK


REFERENCE

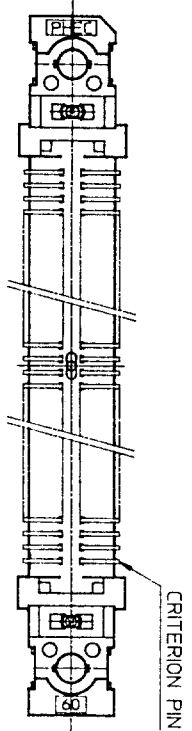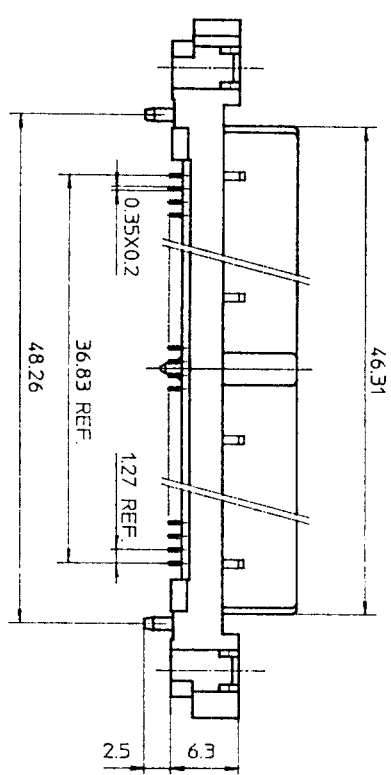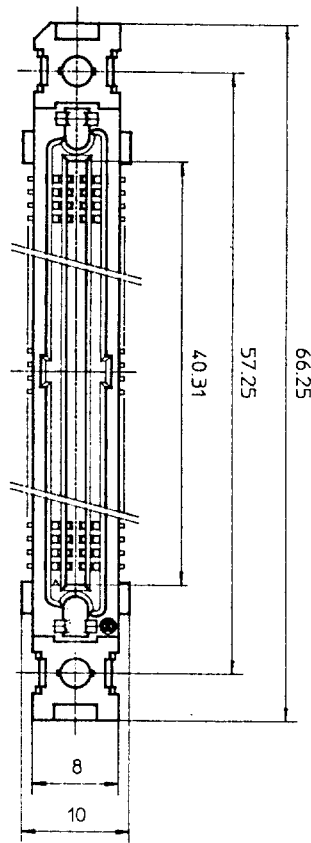


RECOMMENDED P.C. BOARD
THICKNESS : 1.6 ±0.2
HOLE PATTERN (COMPONENT SIDE)

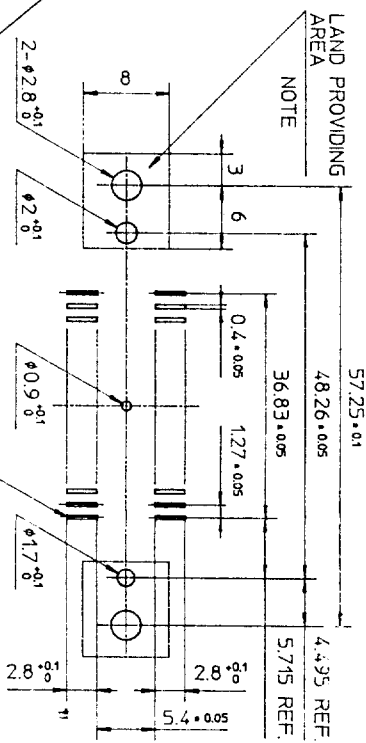

NOTE
PROVIDE LAND SO THAT FLANGE PORTION OF THE CONNECTOR
CAN BE PUT.



PHEC60RT-S210



PHEC60RT-S212

TOLERANCES
UNLESS OTHERWISE SPECIFIED : ±0.3

MATERIAL

INSULATOR : PPS RESIN GLASS REINFORCED (UL94V-0)
COLOR : BLACK

CONTACT : PHOSPHOR BRONZE

SCREW NUT : STAINLESS

NO. OF CONTACTS : 30/ROW X 2 ROWS (MATING SIDE)

CONTACT PLATING TABLE

CONTACT AREA		REMAINDER	
GOLD 0.25 MIN.		SOLDER	
OVER NICKEL 32		OVER NICKEL	







PRINTED CIRCUIT CONNECTOR
SURFACE MOUNT TYPE

REV	DATE	DESCRIPTION	CHKD.
4	'92 8-14	WRONG CONTACT DIM. CORRECTED 100 POSITIONS OF DELETED.	M. S.
3	'92 1-8	DIM. CHANGED.	No
2	'90 6-8	EC7866	No
1	'90 4-20	VARIATION ADDED.	No

SCALE
DIM. IN
MATERIAL

DESIGNED
DRAWN
CHECKED
APPROVED
DATE

CAT. NO.
PHEC60RT-S21_
DRAWING NO.
JSC 90739
REV
4
BURNDY
JAPAN, Ltd.

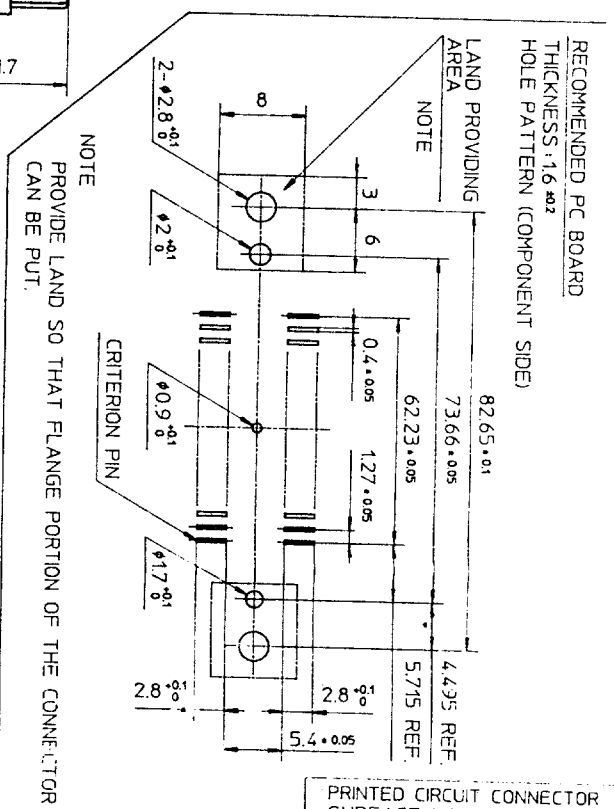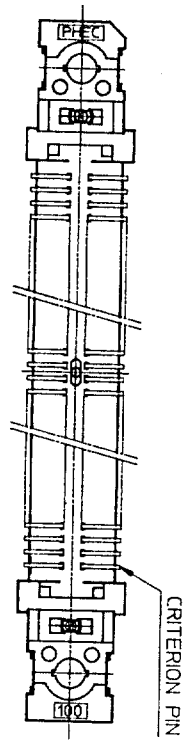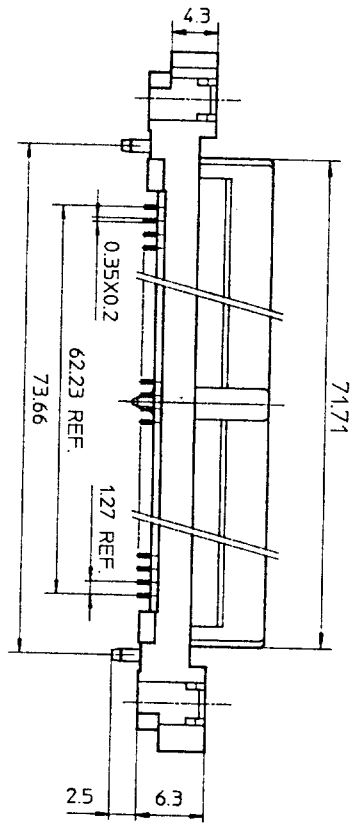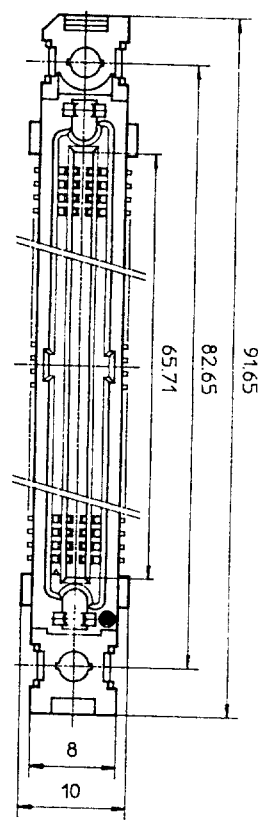

TOLERANCES
UNLESS OTHERWISE SPECIFIED: ±0.3

MATERIAL

INSULATOR : PPS RESIN GLASS REINFORCED (UL94V-0)
COLOR : BLACK

CONTACT : PHOSPHOR BRONZE

SCREW NUT : STAINLESS

NO. OF CONTACTS : 50/ROW X 2 ROWS (MATING SIDE)

CONTACT PLATING TABLE

[THICKNESS : μm]	
CONTACT AREA	REMAINDER
GOLD 0.25 MIN.	SOLDER
OVER NICKEL 3Z	OVER NICKEL

PRINTED CIRCUIT CONNECTOR
SURFACE MOUNT TYPE

CAT. NO.	PHEC100RT-S21
DRAWING NO.	JSC 91839
REV.	0

BURNDY
JAPAN, Ltd.

DESIGNED
DRAWN
CHECKED
APPROVED
DATE Aug. 11, 1992

SCALE
DIM. IN
MATERIAL

REV.	DATE	DESCRIPTION	CHKD.

DRAWING NO.
JSC 90752

MATERIAL
INSULATOR : PBT RESIN GLASS REINFORCED (UL94V-0)
COLOR : BLACK
CONTACT : PHOSPHOR BRONZE
MOUNTING LATCH : PHOSPHOR BRONZE
SOLDER PLATED

CONTACT PLATING TABLE
[THICKNESS, μ m]



CONTACT AREA	REMAINDER
GOLD 0.25 MIN OVER NICKEL 3.2	SOLDER OVER NICKEL

REV	DATE	DESCRIPTION	CHKD.
5	'93 6-22	100 POSITIONS ADDED.	M.O.
4	'93 2-1	WRONG CONTACT DIM. CORRECTED.	M.O.
3	'92 8-11	100,120 POSITIONS DELETED. 30,34,50,68 POSITIONS ADDED.	M.O.
2	'90 5-30	DIM. CHANGED (36.61 $\rightarrow$ 33.61)	M.O.
1	'90 5-14	EC 7866	HE

REFERENCE

CAT. NO.	NO. OF CONTACTS (MATING SIDE)	DIMENSIONS				
		A	B	C	D	E
PHEC30R-S21-H	15/ROW X 2 ROWS	34.55	31.75	27.26	21.26	17.78
PHEC34R-S21-H	17/ROW X 2 ROWS	37.09	34.29	29.8	23.8	20.32
PHEC40R-S21-H	20/ROW X 2 ROWS	40.9	38.1	33.61	27.61	24.13
PHEC50R-S21-H	25/ROW X 2 ROWS	47.25	44.45	39.96	33.96	30.48
PHEC60R-S21-H	30/ROW X 2 ROWS	53.6	50.8	46.31	40.31	36.83
PHEC68R-S21-H	34/ROW X 2 ROWS	58.68	55.88	51.39	45.39	41.91
PHEC80R-S21-H	40/ROW X 2 ROWS	66.3	63.5	59.01	53.01	49.53
PHEC100R-S21-H	50/ROW X 2 ROWS	79.0	76.2	71.71	65.71	62.23



TOLERANCES
UNLESS OTHERWISE SPECIFIED: ± 0.3

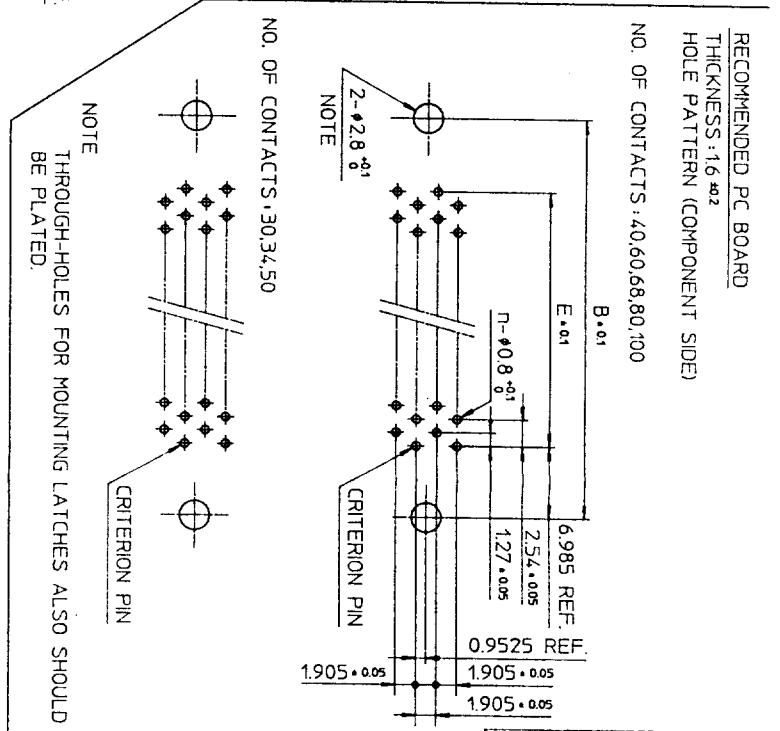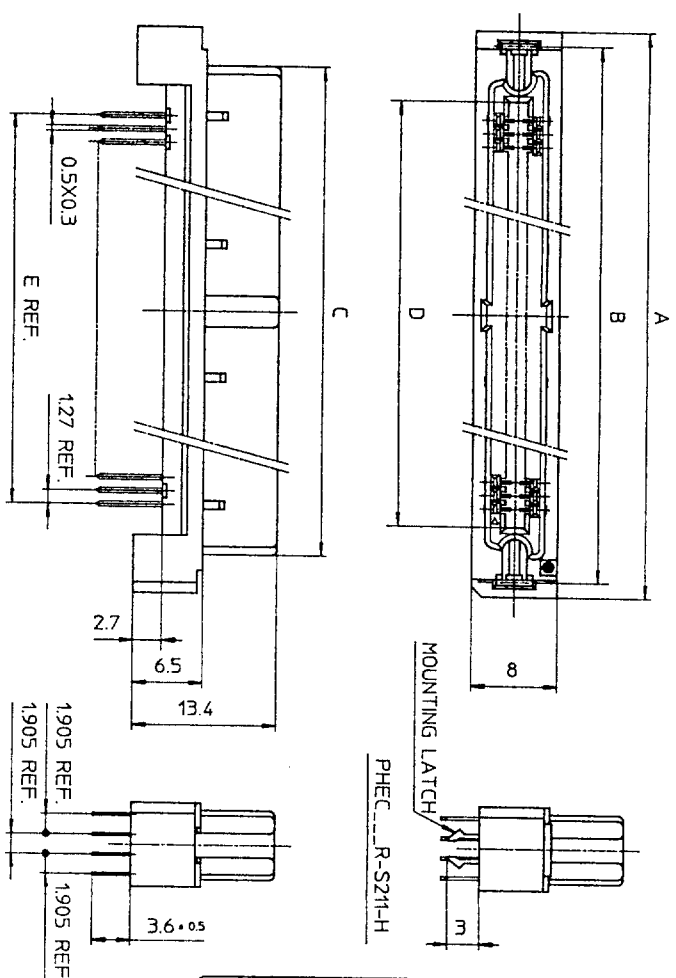



NO. OF CONTACTS: 30,34,50	RECOMMENDED PC BOARD THICKNESS: 1.6 ± 0.2 HOLE PATTERN (COMPONENT SIDE)
NOTE THROUGH-HOLES FOR MOUNTING LATCHES ALSO SHOULD BE PLATED.	NO. OF CONTACTS: 40,60,68,80,100
PRINTED CIRCUIT CONNECTOR HIGH STAND OFF TYPE	CAT. NO. PHEC_R-S21-H
DESIGNED	DRAWING NO. JSC 90752
DRAWN	REV 5
CHECKED	
APPROVED	
DATE Mar. 24, 1990	

RECOMMENDED PC BOARD
THICKNESS: 1.6 ±0.2
HOLE PATTERN (COMPONENT SIDE)


NO. OF CONTACTS: 40,60,68

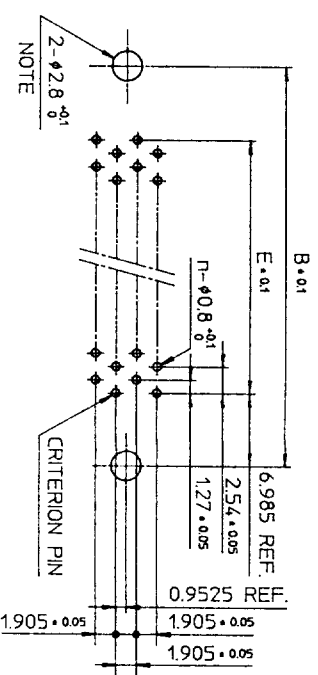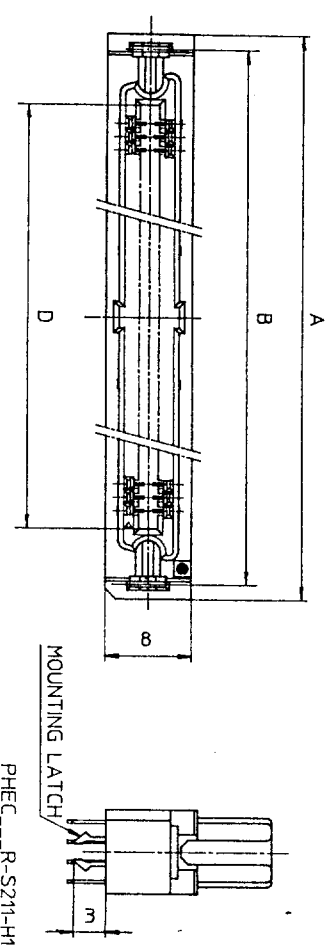


NO. OF CONTACTS: 30,34,50

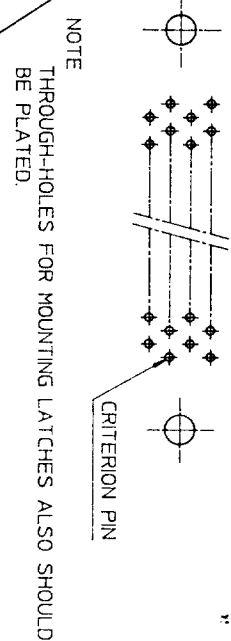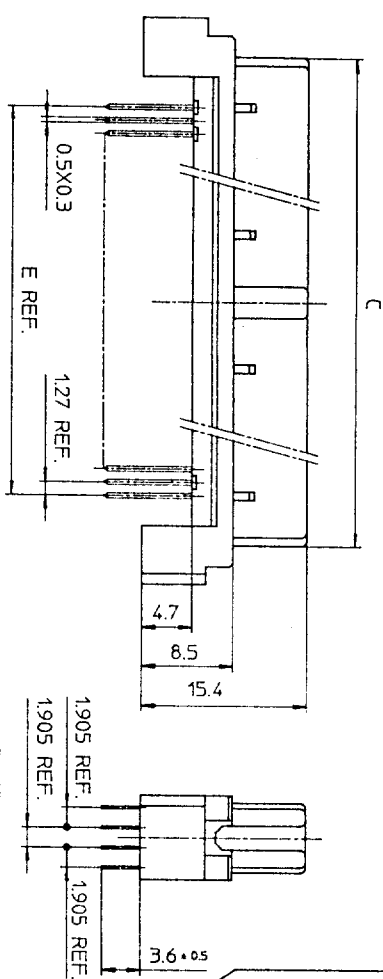

NO. OF CONTACTS: 40,60,68

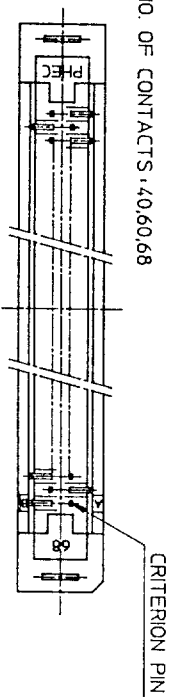

NO. OF CONTACTS: 30,34,50



TOLERANCES
UNLESS OTHERWISE SPECIFIED: ±0.3

CAT. NO.	NO. OF CONTACTS (MATING SIDE)	DIMENSIONS				
		A	B	C	D	E
PHEC30R-S21-H1	15/ROW X 2 ROWS	34.55	31.75	27.26	21.26	17.78
PHEC34R-S21-H1	17/ROW X 2 ROWS	37.09	34.29	29.8	23.8	20.32
PHEC40R-S21-H1	20/ROW X 2 ROWS	40.9	38.1	33.61	27.61	24.13
PHEC50R-S21-H1	25/ROW X 2 ROWS	47.25	44.45	39.96	33.96	30.48
PHEC60R-S21-H1	30/ROW X 2 ROWS	53.6	50.8	46.31	40.31	36.83
PHEC68R-S21-H1	34/ROW X 2 ROWS	58.68	55.88	51.39	45.39	41.91

MATERIAL

INSULATOR: PBT RESIN GLASS REINFORCED (UL94V-0)

COLOR: BLACK

CONTACT: PHOSPHOR BRONZE

MOUNTING LATCH: PHOSPHOR BRONZE

SOLDER PLATED

CONTACT PLATING TABLE

[THICKNESS: μm]

CONTACT AREA	REMAINDER
GOLD 0.25 MIN. OVER NICKEL 3.2	SOLDER OVER NICKEL

PRINTED CIRCUIT CONNECTOR
HIGH STAND OFF TYPE
CAT. NO.

PHEC_R-S21-H1

DRAWING NO. JSC 91840

REV 1

BURNDY JAPAN, Ltd.

DESIGNED

DRAWN *M. Oba*

CHECKED A. matsuo

APPROVED *S. Ito*

DATE Aug. 17, 1992


SCALE

DIM IN mm


MATERIAL

REV	DATE	DESCRIPTION	CKD
1	93	WRONG CONTACT DIM. CORRECTED.	
2	93		
3	93		

SCREW NUT



PHEC...R-R212




PHEC...R-R211

RECOMMENDED PC BOARD


THICKNESS: 1.6 ±0.2
HOLE PATTERN (COMPONENT SIDE)

n : NO. OF CONTACTS

NO. OF CONTACTS: 40,60,68,80,100,120

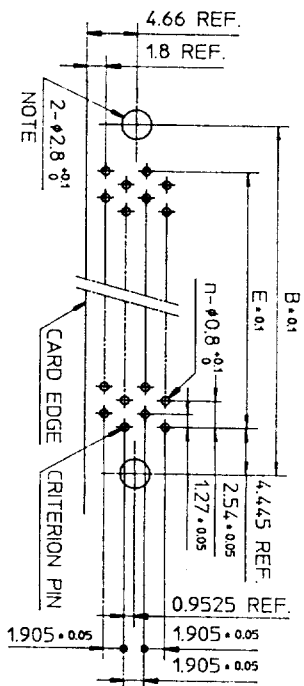

NO. OF CONTACTS: 30,34,50

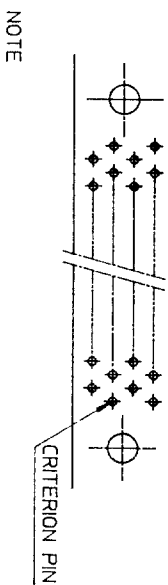


NOTE
THROUGH-HOLES FOR MOUNTING LATCHES ALSO SHOULD BE PLATED.


TOLERANCES

UNLESS OTHERWISE SPECIFIED, ±0.3

NO. OF CONTACTS: 40,60,68,80,100,120

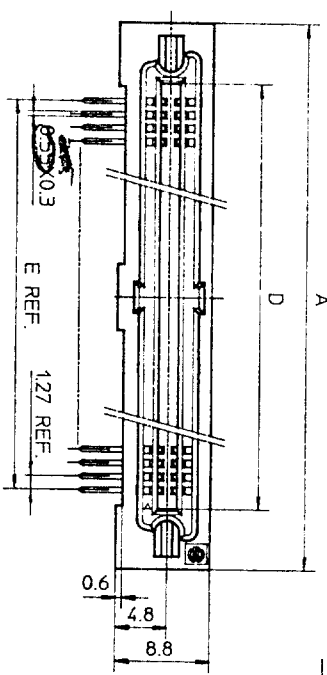

CRITERION PIN

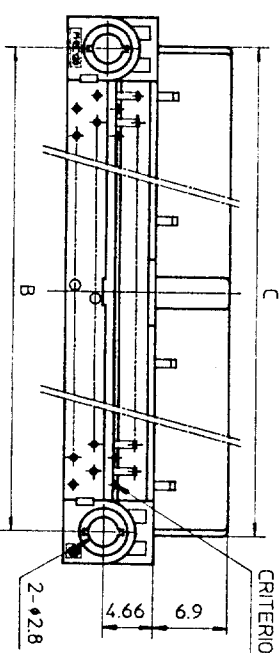

NO. OF CONTACTS: 30,34,50

MATERIAL

BODY: PBT RESIN GLASS REINFORCED (UL94V-0)
LOCATOR: COLOR, BLACK

CONTACT: PHOSPHOR BRONZE

MOUNTING LATCH: PHOSPHOR BRONZE
SOLDER PLATED

SCREW NUT: STEEL
NICKEL PLATED

CAT. NO.	NO. OF CONTACTS (MATING SIDE)	DIMENSIONS				
		A	B	C	D	E
PHEC30R-R21	15/ROW X 2 ROWS	32.67	26.67	27.26	21.26	17.78
PHEC34R-R21	17/ROW X 2 ROWS	35.21	29.21	29.8	23.8	20.32
PHEC40R-R21	20/ROW X 2 ROWS	39.02	33.02	33.61	27.61	24.13
PHEC50R-R21	25/ROW X 2 ROWS	45.37	39.37	39.96	33.96	30.48
PHEC60R-R21	30/ROW X 2 ROWS	51.72	45.72	46.31	40.31	36.83
PHEC68R-R21	34/ROW X 2 ROWS	56.8	50.8	51.39	45.39	41.91
PHEC80R-R21	40/ROW X 2 ROWS	64.42	58.42	59.01	53.01	49.53
PHEC100R-R21	50/ROW X 2 ROWS	77.12	71.12	71.71	65.71	62.23
PHEC120R-R21	60/ROW X 2 ROWS	89.82	83.82	84.41	78.41	74.93

CONTACT PLATING TABLE

(THICKNESS: μm)

CONTACT AREA	REMAINDER
GOLD 0.25 MIN. OVER NICKEL 3.2	SOLDER OVER NICKEL

PRINTED CIRCUIT CONNECTOR

CAT. NO.	PHEC...R-R21
DRAWING NO.	JSC 90738
REV.	3
BURNDY JAPAN, Ltd.	

DESIGNED	
DRAWN	M. Oda
CHECKED	4.64
APPROVED	Mar. 8, 1990
DATE	

SCALE	
DIM. IN	mm
MATERIAL	

REV.	DATE	DESCRIPTION	CKD
3	92-8-11	30,34,50,68 POSITIONS ADDED.	W. O.
2	90-6-8	EC 7866	No
1	90-4-20	EC 7837	No
REFERENCE			

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com