


max. 237 m³/h

DC axial fans

Series 4100 N 119 x 119 x 38 mm

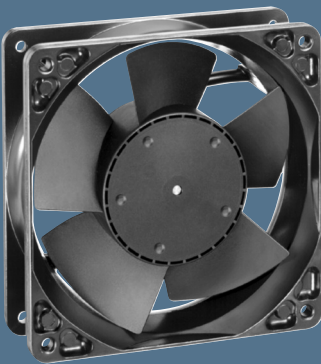



Highlights:

- Very rigid compression curve for high air flow at high back pressure.
- Low operating noise level at high back pressure.
- Optional Vario-Pro: Highly adaptable software configuration of the fan enables a tailor-made solution to the specific requirements of your applications.

General characteristics:

- Material: aluminium housing, fibreglass-reinforced PA impeller; housing with grounding lug for screw M4 x 8 (Torx).
- Fully integrated electronic commutation.
- Protected against reverse polarity and locking.
- Electrical connection with flat plugs, 2.8 x 0.5 mm. Optionally with strands.
- Air intake over struts. Direction of rotation clockwise, seen on rotor.
- Mass: 390 g.

Nominal data		Air flow	Air flow	Nominal voltage	Voltage range	Sound pressure level	Sound power level	Sinter sleeve bearings	Ball bearings	Power input	Nominal speed	Temperature range	Service life L ₁₀ (40 °C)	Service life L ₁₀ (T _{max})	Life expectancy L ₁₀ Δ	Curve	Specials
Type		m ³ /h	CFM	VDC	VDC	dB(A)	Bel(A)	□/■		Watts	RPM	°C	Hours	Hours	Hours		P. 110-114
4182 NGX		160	94,2	12	7...15	44	5,3	□		3,5	2 800	-10...+75	85 000 / 37 500	167 500	167 500	1	/2
4182 NX		180	105,9	12	7...15	49	5,7	■		4,5	3 200	-30...+75	85 000 / 37 500	167 500	167 500	2	/2/12
4182 NXH		237	139,5	12	7...14	57	6,5	■		11,0	4 400	-30...+55	70 000 / 50 000	142 500	142 500	3	
4184 NGX		160	94,2	24	12...30	44	5,3	□		3,5	2 800	-10...+75	85 000 / 37 500	167 500	167 500	1	/2
4184 NXM		160	94,2	24	12...30	44	5,3	■		3,5	2 800	-30...+75	85 000 / 37 500	167 500	167 500	1	
4184 NX		180	105,9	24	12...29	49	5,7	■		4,5	3 200	-30...+75	85 000 / 37 500	167 500	167 500	2	/2/17
4184 NXH		237	139,5	24	12...25	57	6,5	■		11,0	4 400	-30...+55	70 000 / 50 000	142 500	142 500	3	/2
4188 NGX		160	94,2	48	36...56	44	5,3	□		3,8	2 800	-10...+75	85 000 / 37 500	167 500	167 500	1	
4188 NXM		160	94,2	48	36...56	44	5,3	■		3,5	2 800	-30...+75	85 000 / 37 500	167 500	167 500	1	/12

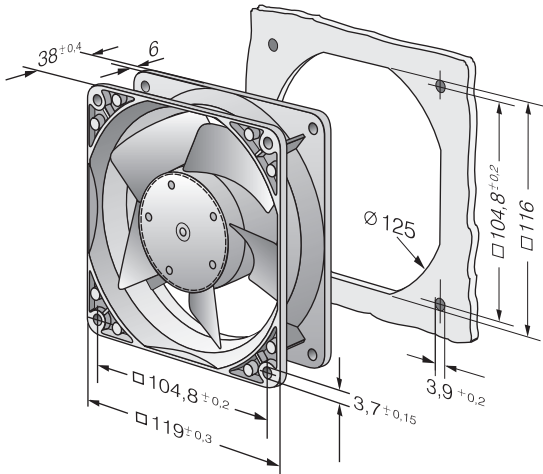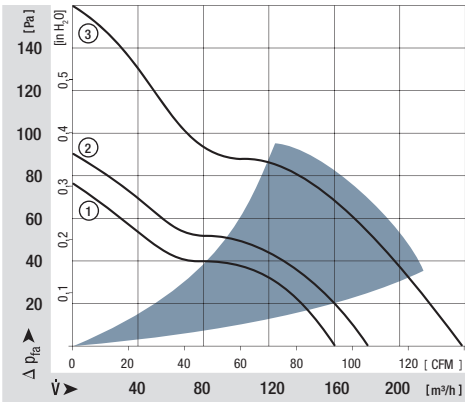

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com