



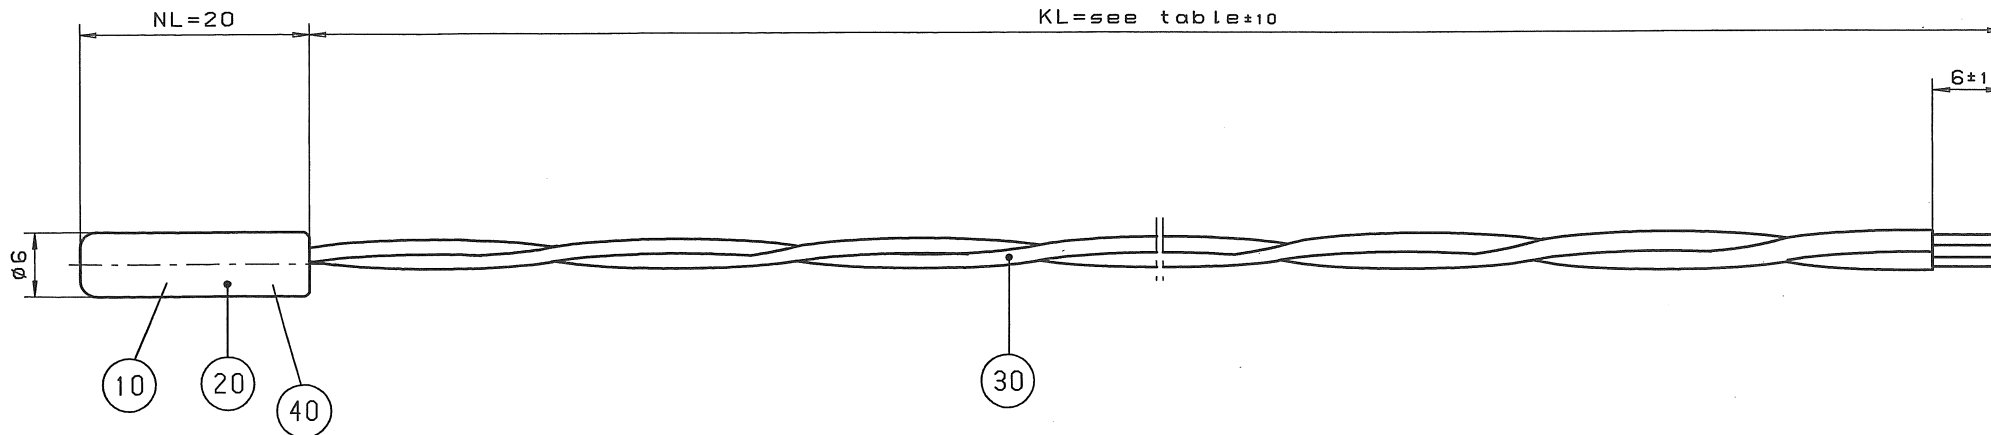

Insulation test: 500V DC, 10sec.
 Insulation resistance $\geq 1000M\Omega$ at RT
 Temperature range: $-40^{\circ}C$ to $+500^{\circ}C$ @
 Tolerance 1/3B between $0^{\circ}C$ and $100^{\circ}C$

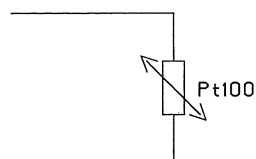

Connection scheme
 2-wire connection

All dimensions in mm!

40	1	Sealing compound		
30	1	Cable NKM-D2G 2x0,5mm		
20	1	Protection sleeve $\varnothing 6 \times 20$ lgth.	1.4571	
10	1	RTD element Pt100 M 422		DIN EN60751/ cl.1/3B
Pos.	Qty.	Designation	Material	Remark

Ind.	Änderung	Datum	Name	Mikro	Verteiler	Versendung	Maßstab	Werkstoff, Holzzeug
d	12777	07.09.09	Heck				2:1	
c	12044	20.04.05	Riedel					
b	11885	23.07.04	Riedel					
a	11722	06.04.04	Riedel					
Ind.	Änderung	Datum	Name	Mikro	Verteiler	Versendung	Maßstab	Werkstoff, Holzzeug
Bearb.	25.06.01		Riedel				2:1	
Gepr.	21.11.13		Riedel					
TD	21.11.13		Riedel					
Mikro								
Benennung								W-EYK 6
Immersion-RTD-assembly								
Zeichnungsnummer								E30.500-109(W)
Form								A3
Index								d
Bl.								
Heraeus Sensor Technology								
E30.500-109(W)								
A3								
d								
Bl.								

Customer's release HST-drawing		
Date	Signature	Firm stamp

30.500.138	600	0,60 $\pm 25\%$
30.500.109	300	0,31 $\pm 25\%$
Ident-no.	KL	cable resistance

C034

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com