

PK SERIES


85°C Standard

◆FEATURES

- Load life : 85°C 2000 hours.
- RoHS compliance.

◆SPECIFICATIONS

Items	Characteristics	
Category Temperature Range	-40~+85°C	-25~+85°C
Rated Voltage Range	6.3~400Vdc	450Vdc
Capacitance Tolerance	±20%(20°C, 120Hz)	
Leakage Current(MAX)	6.3~100Vdc	160~450Vdc
	I=0.01CV or 3μA whichever is greater. (After 2 minutes application of rated voltage)	CV≤1000
		CV>1000
	I=Leakage Current(μA)	C=Capacitance(μF) V=Rated Voltage(Vdc)
(tanδ) Dissipation Factor(MAX)	Rated Voltage (Vdc)	6.3 10 16 25 35 50 63 100 160 200 250 350 400 450 (20°C, 120Hz)
	tanδ	0.28 0.24 0.20 0.16 0.14 0.12 0.10 0.10 0.20 0.20 0.20 0.25 0.25 0.25
When capacitance is over 1000μF, tanδ shall be added 0.02 to the listed value with increase of every 1000μF.		
Endurance	After applying rated voltage with rated ripple current for 2000 hours at 85°C, the capacitors shall meet the following requirements.	
	Capacitance Change	Within ±25% of the initial value.
	Dissipation Factor	Not more than 200% of the specified value.
Low Temperature Stability Impedance Ratio(MAX)	Leakage Current	Not more than the specified value.
	Rated Voltage (Vdc)	6.3 10 16 25 35 50 63 100 160 200 250 350 400 450 (120Hz)
	Z(-25°C)/Z(20°C)	5 4 3 2 2 2 2 2 3 3 4 5 5 7
Z(-40°C)/Z(20°C)		
12 10 8 5 4 3 3 3 4 4 8 8 10 -		

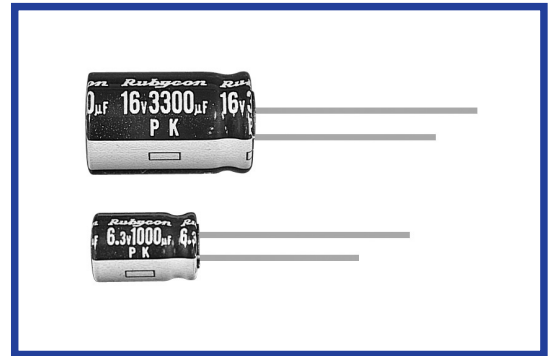

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)	60(50)	120	500	1k	10k≤
Coefficient	0.47~1μF	0.50	1.00	1.20	1.30 1.50
	2.2~4.7μF	0.65	1.00	1.20	1.30 1.50
	10~47μF	0.80	1.00	1.20	1.30 1.50
	100~1000μF	0.80	1.00	1.10	1.15 1.20
	2200~33000μF	0.80	1.00	1.05	1.10 1.15

◆OPTION

	Code
PET Sleeve	EFC

◆DIMENSIONS

(mm)

φD	5 6.3 8 10 12.5 16 18		
φd	0.5	0.6	0.8
F	2.0 2.5	3.5	5.0 7.5
α	WV≤100:1.5 WV≥160:2.0		
	2.0		

◆PART NUMBER

□□□	PK	□□□□□	M	□□□	□□	D×L
Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

◆ **STANDARD SIZE**

Size $\phi D \times L$ (mm), Rated Ripple Current (mA r.m.s./85°C, 120Hz)[illegible][illegible]

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com