

SPECIFICATION


Model No. : **ALA.01**

Part No. : **ALA.01.07.0095A**

Product Name : 1575MHz Ceramic Active Loop Module

Features : 16dB One Stage
PCB Dims: 45*10*2.3mmmm
RoHS compliant

Photo :

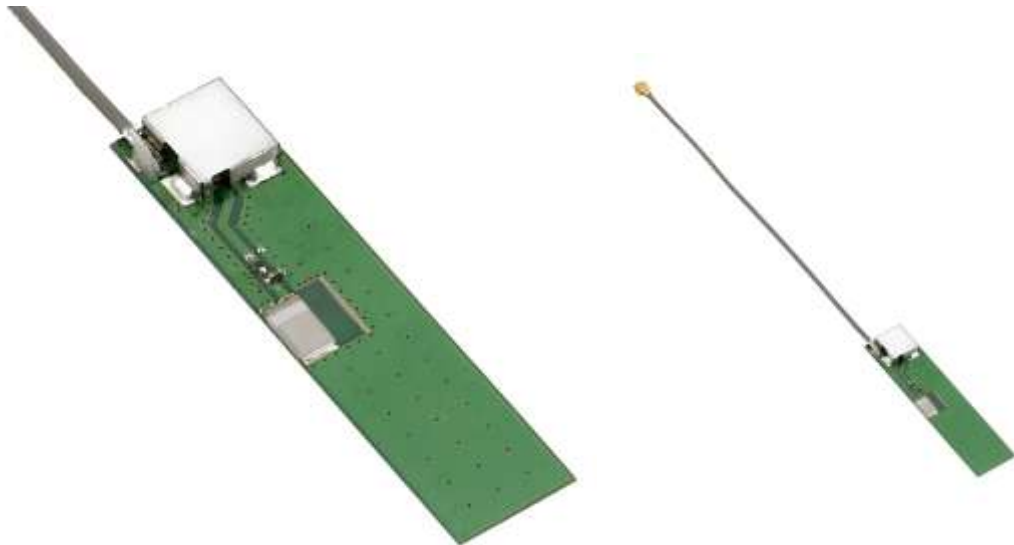

1. Introduction

The active loop antenna ALA.01 is best suited for applications where omni-directionality is important. The average gain is similar to an 18mm active patch antenna but in a much narrower profile, only 2.3mm at its highest point, allowing this antenna to be used perpendicular to the device main-board, or placed adjacent to the top or bottom of device main board. A one stage LNA combined with a SAW filter boosts the S/N (C/N) of the GPS system and helps to overcome some noise effects from today's crowded device boards that passive antennas cannot resolve.

The antenna can be placed in a plastic slot in the device housing. Alternatively adhesive foam, hot-melt, or non-conductive screws could be used to mount the antenna. The core antenna design principle of loop current flow tends to "lock-out" a lot of surface noise from close circuitry from entering the antenna.

2. Specification

Antenna

Parameter	Specification
Frequency	1575.42 ± 1.023MHz
Bandwidth (10dB return loss)	70MHz typical
Peak Gain	Typ. 3.1dBi
Avg. Gain	-2.2dBi
Polarization	Linear
VSWR	2 max (depends on the special environment)
Dimension	5*3*0.5mm

LNA

Parameter	Specification
Frequency	1575.42 ± 1.023MHz
Gain	Typ. 16dB @ 3V Typ. 17.8dB @ 5V
Noise Figure	Typ. 1.3dB @ 3V
Filter (out of band attenuation)	Saw Filter (fo=1575.42MHz) 40dB typ. fo±50MHz 45dB min. fo±100MHz
Output VSWR	< 2.0
Input Voltage	DC = 2.6~5.0V
Current	DC = 13mA at 3.0V

Cable *& Connector


Parameter	Specification
RF Cable	95±5mm 1.13 Coaxial Cable
Connector	IPEX MHF(U.FL)

Total Specification

Parameter	Specification
Frequency	1575.42 ± 1.023MHz
Gain	16 ± 4dB @ 90°
Output Impedance	50Ω
Polarization	Linear
Output VSWR	Max 2.0
Operation Temperature	-40°C to + 85°C
Storage Temperature	-40°C to + 90°C
Humidity	10 to 95%
Input Voltage	Min. 2.6V, Typ. 3.0V, Max. 5.0V
Dimensions	45*10*2.3mm
Weight	1.35±0.5g (typical)

3. Performance Measurement

3.1 Block Diagram

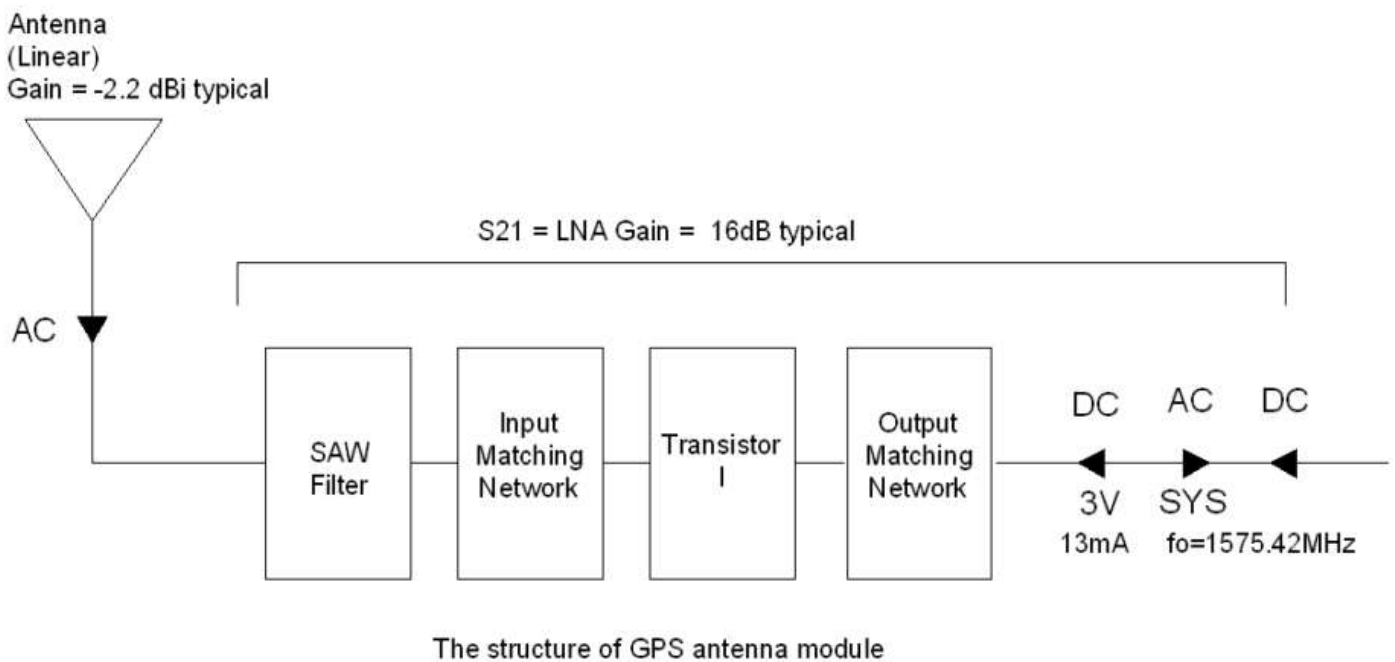

4. Measurement Method

4.1 Chip

a) Reflection Co-efficient Measurement

a. Equipment: Network Analyzer (Agilent E5071A)(Fig.1)

b. Item S_{11} Log Chart(Return Loss) S_{11} Smith Chart (impedance)

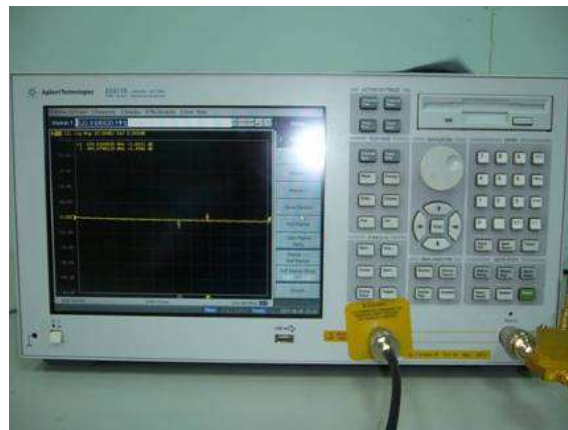


Figure 1. Network Analyzer

b) Pattern Measurement

- Equipment: Anechoic Chamber (Fig. 2), Network Analyzer (Agilent E8753ES)
- Item: Gain Pattern, Axial ratio

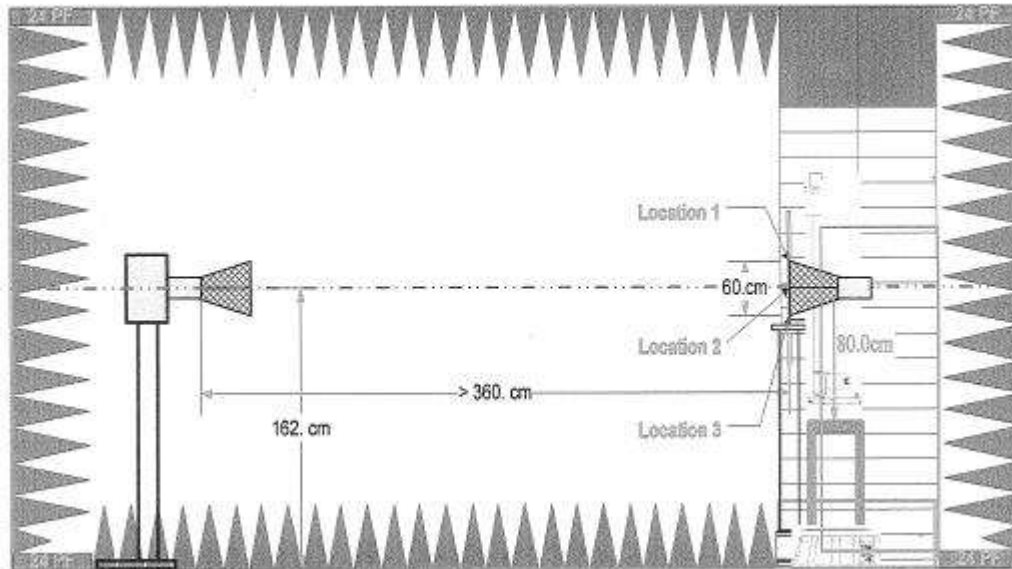


Figure 2. Quiet Room

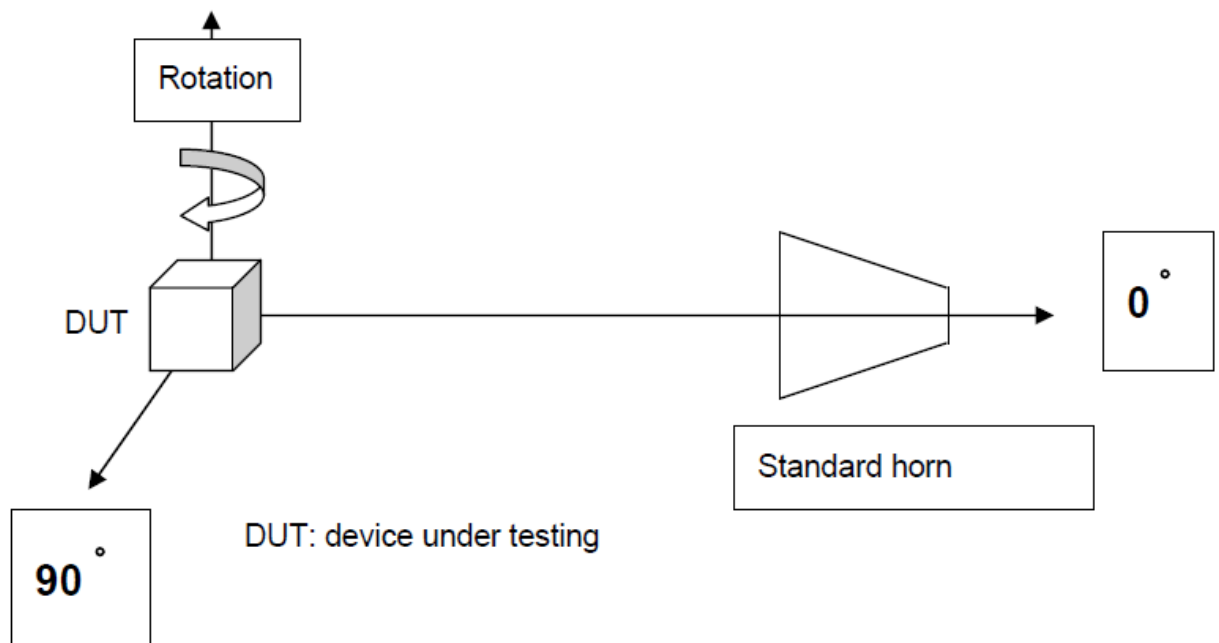


Figure 3. Schematic of measurement set-up

4.2 LNA

a) Parameter Measurement

- a. Equipment: Network Analyzer (Aglient E5071B)(Fig.4)
- b. S_{11} , S_{12} , S_{21} , S_{22}

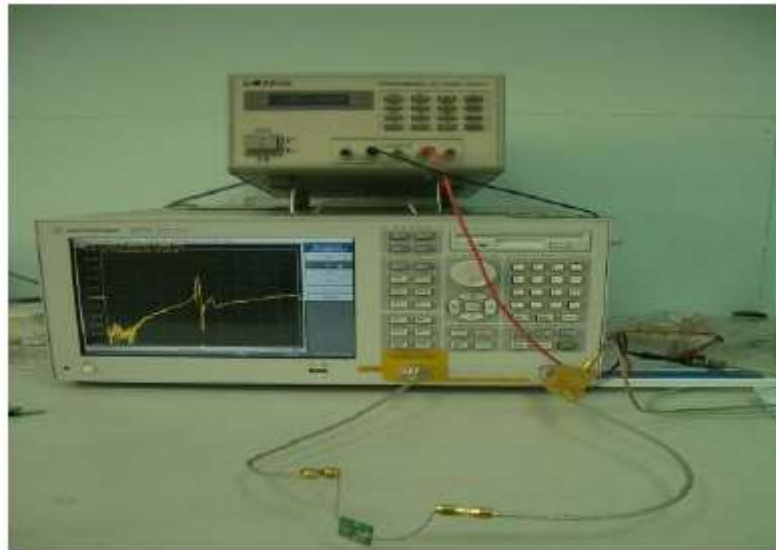


Figure 4. Network Analyzer

a) Noise Figure Measurement

- a. Equipment: Noise Meter (Aglient E4407B)(Fig.5)
- b. Environment: Shielding Room (Fig. 6)
- c. Item: N.F (Noise Figure)



Fig. 5 Noise Meter

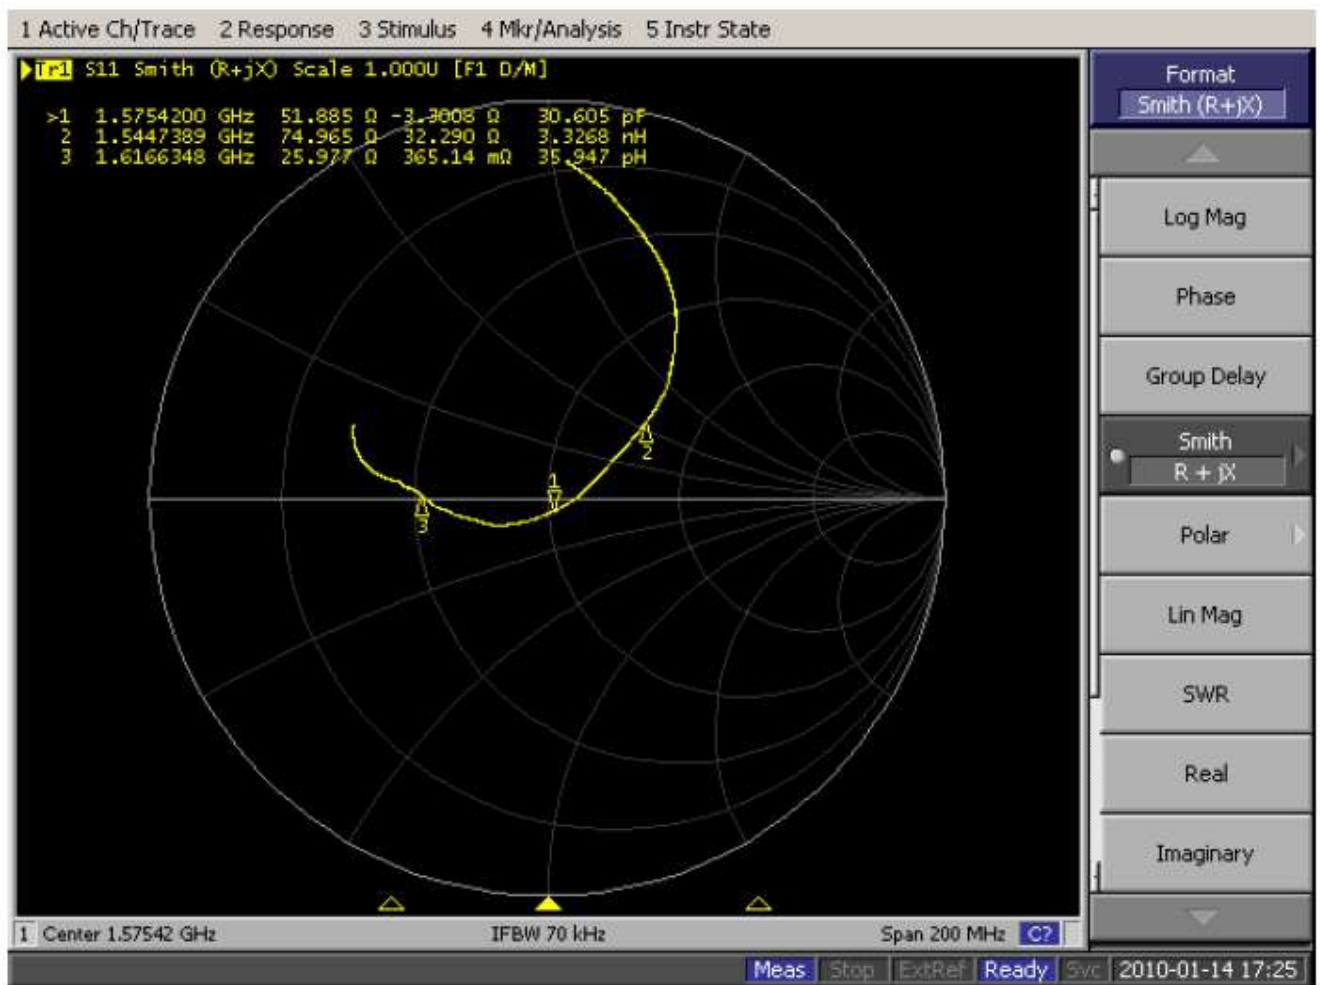


Fig.6 Shielding Room


5. Measured Values

5.1 Chip

5.1.1 S_{11} Smith Chart (Impedance)




5.1.2 S_{11} Log Chart (Return Loss): Bandwidth $S_{11} < -10\text{dB}$

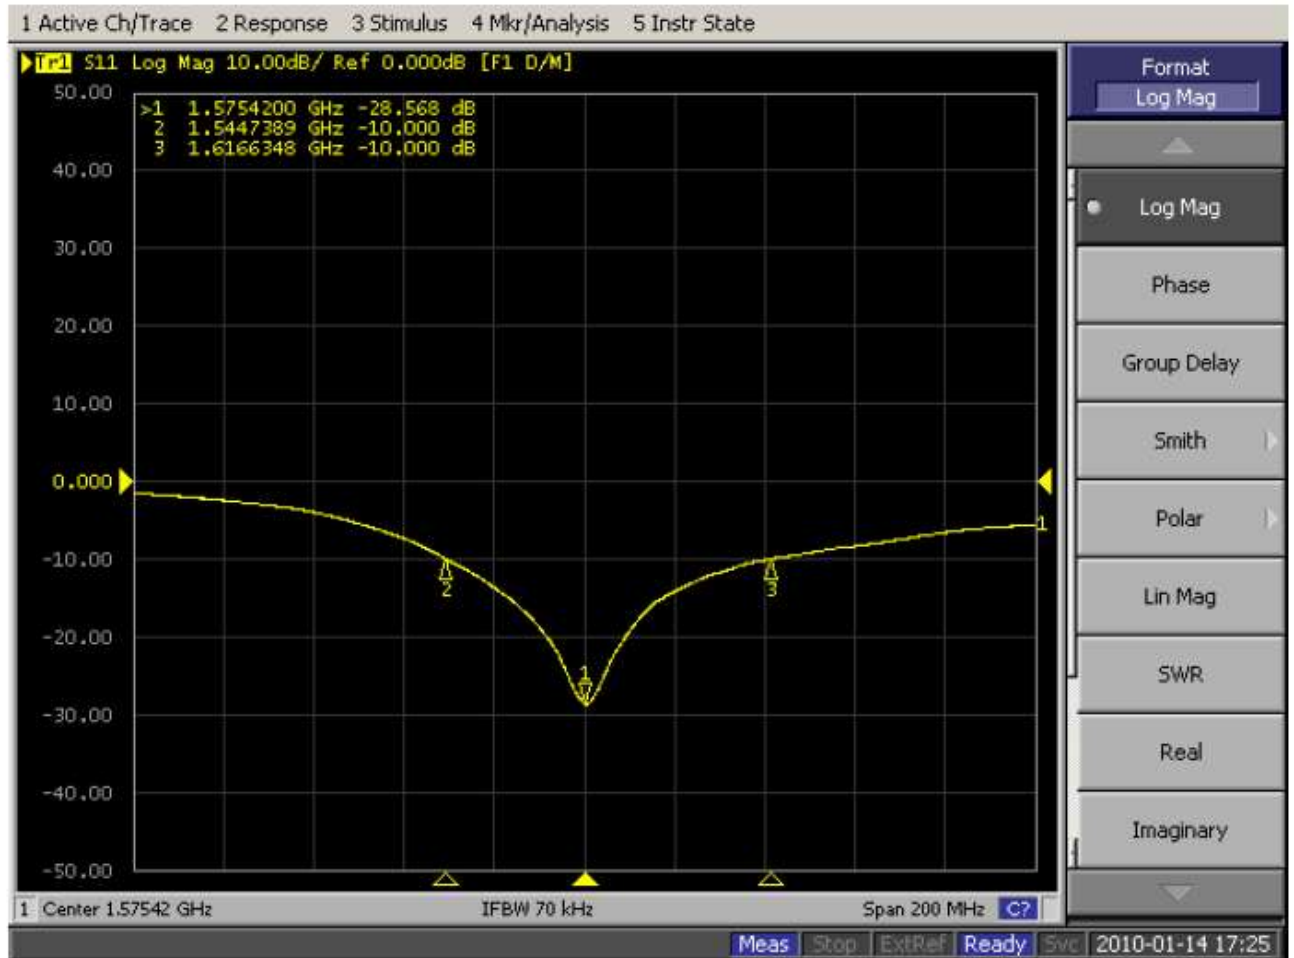

5.1.3 S_{11} VSR




5.1.4 Radiation Patterns (Excluding LNA)

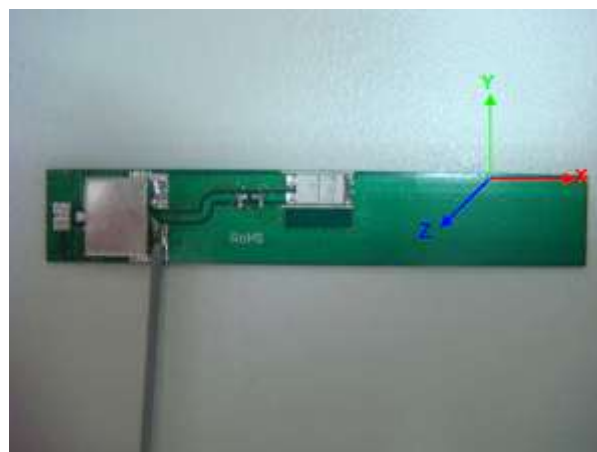

XZ-plane


Far-field amplitude of XZ.nsi

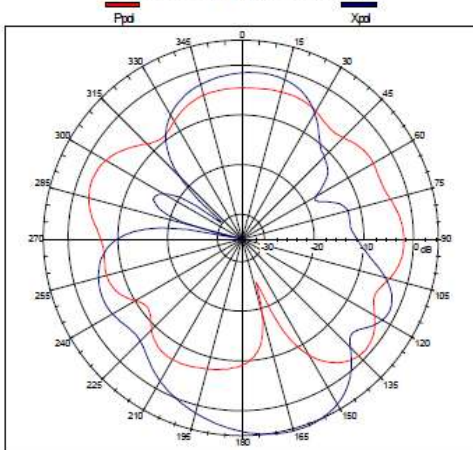

(Peak Gain = 4.92 dBi, Average Gain = -1.62 dBi)

YZ-plane


Far-field amplitude of YZ.nsi

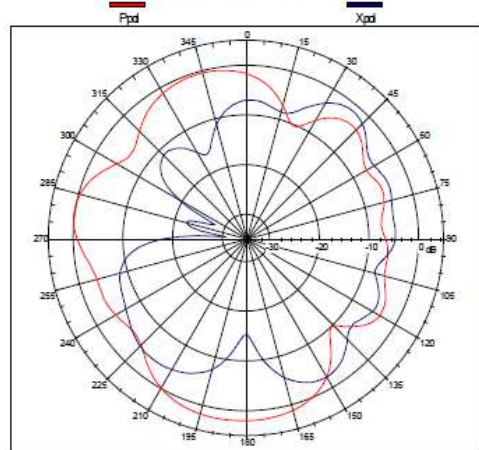

(Peak Gain = 1.89dBi, Average Gain = -1.57dBi)

XY-plane

Far-field amplitude of XY.nsi

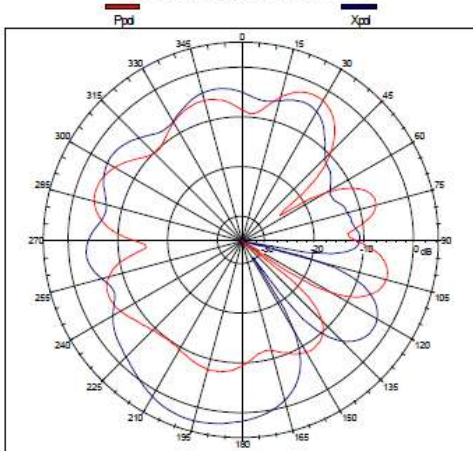


(Peak Gain = 2.75dBi, Average Gain = -3.44 dBi)

Plane	XZ	YZ	XY
Average Gain	-1.62	-1.57	-3.44
Peak Gain	4.92	1.89	2.75


Note: Total Gain = The total power of radiation pattern (exclude LNA Gain from GP8) + LNA Gain - cable loss (1.1dB/m)

5.2 Low Noise Amplifier (LNA)

5.2.1 S_{11} (network analyzer input power -40dB)

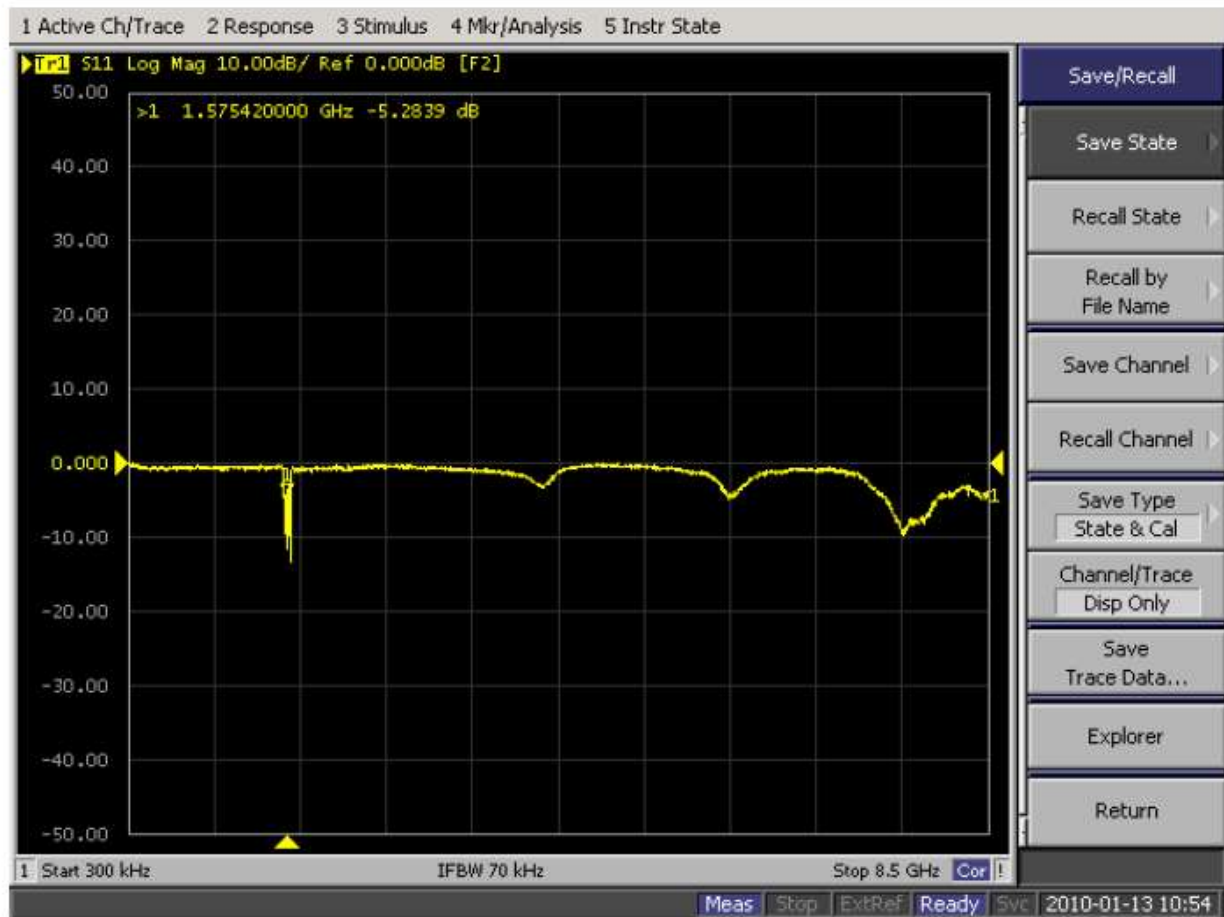

5.2.2 S_{12} (network analyzer input power -40dB)

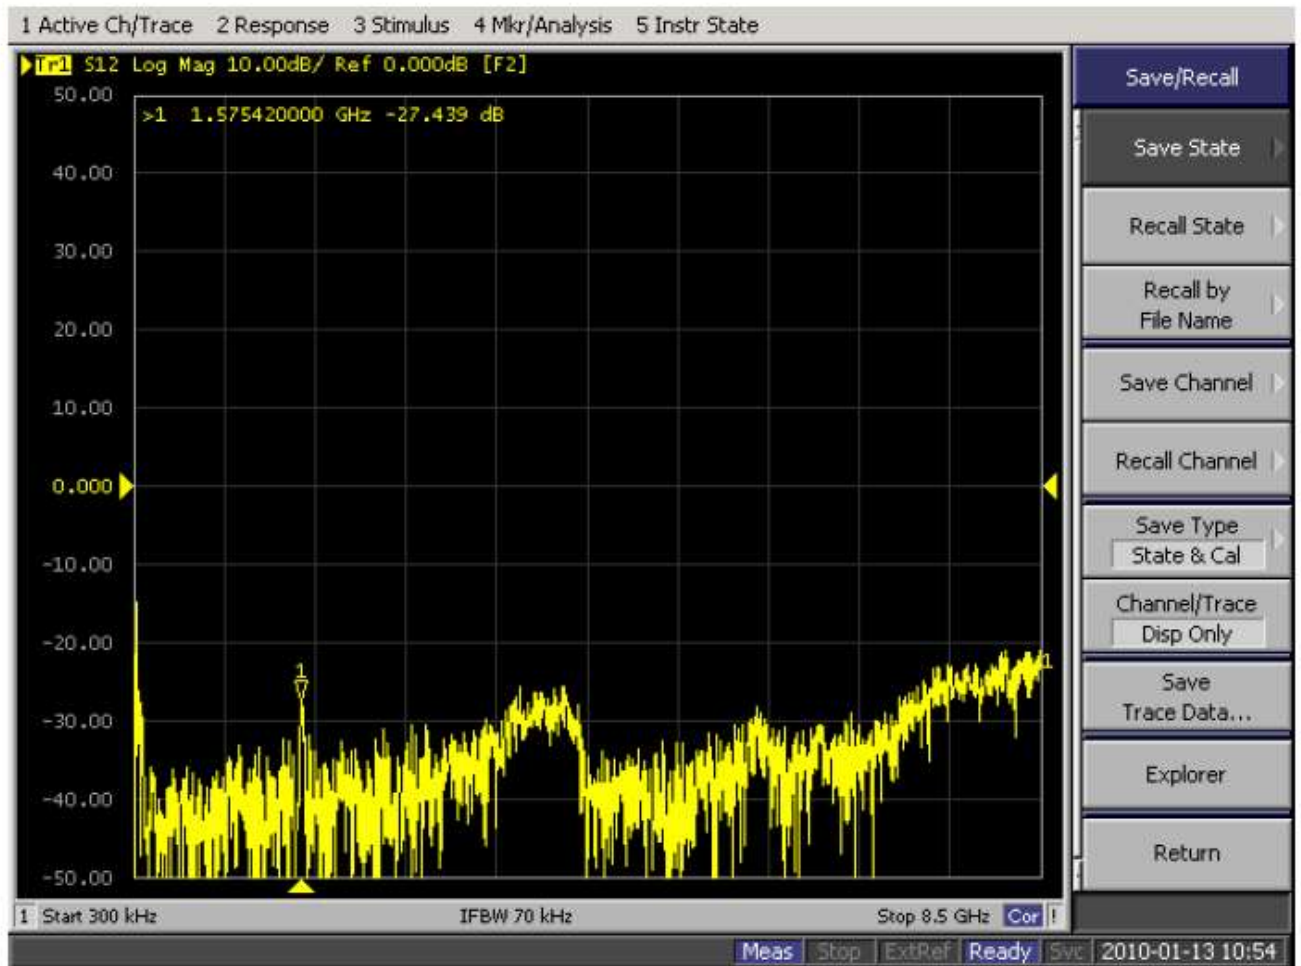


5.2.3 S_{21} (Gain) (network analyzer input power -40dB)



5.2.4 S_{22} (Gain) (network analyzer input power -40dB)




5.3 Noise Figure

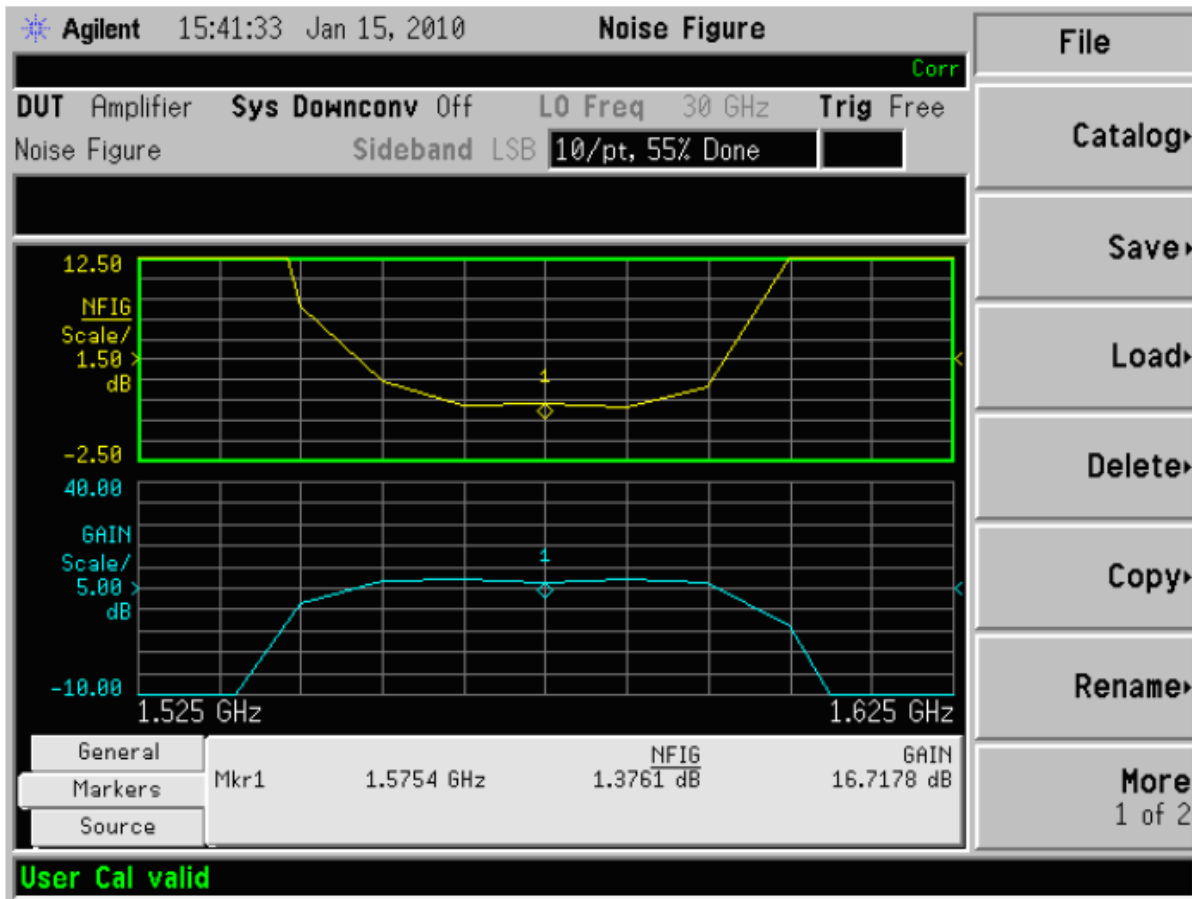


6. Drawing


Top View

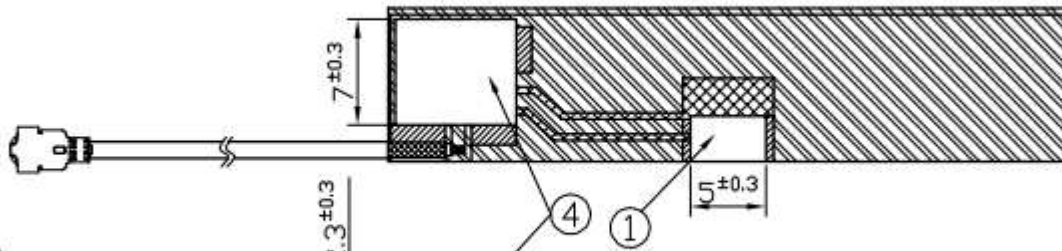

Side View

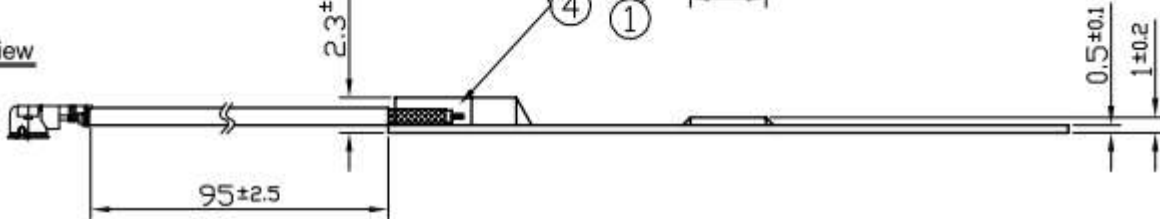

Bottom View

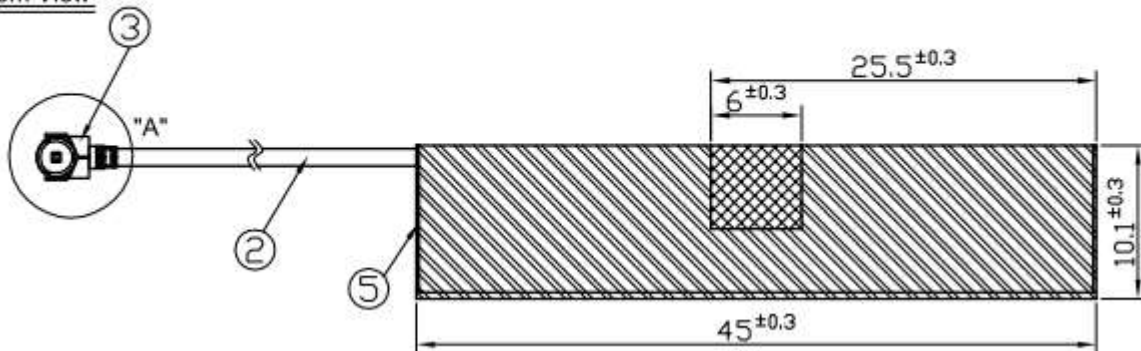

1	Chip Antenna: 5*3*0.5mm
2	Cable Ø1.13 L=95±5mm
3	IPEX MHFI(U.FL)
4	Shielding Case
5	PCB

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com