



ADAM-6015 ADAM-6017 ADAM-6018

7-ch Isolated RTD Input Modbus TCP Module
8-ch Isolated Analog Input Modbus TCP Module with 2-ch DO
8-ch Isolated Thermocouple Input Modbus TCP Module with 8-ch DO

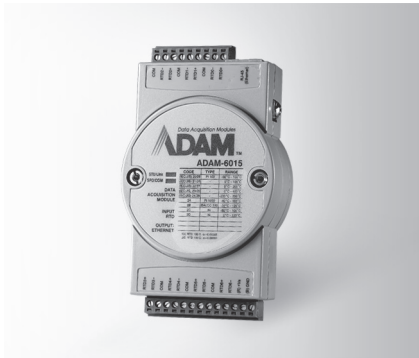

ADAM-6015

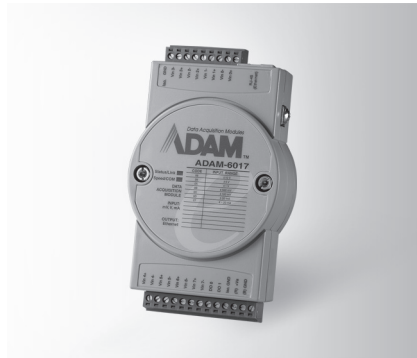

ADAM-6017



ADAM-6018



Specifications

Analog Input

- **Channels** 7 (differential)
- **Input Impedance** > 10 M Ω
- **Input Connections** 2 or 3 wire
- **Input Type** Pt, Balco and Ni RTD
- **RTD Types and Temperature Ranges**

Pt 100	-50°C ~ 150°C
	0°C ~ 100°C
	0°C ~ 200°C
	0°C ~ 400°C
	-200°C ~ 200°C
Pt 1000	-40°C ~ 160°C
Supports both IEC 60751 ITS90 (0.03851 W/W/°C) and JIS C 1604 (0.03916 W/W/°C)	
Balco 500	-30°C ~ 120°C
Ni 518	-80°C ~ 100°C
	0°C ~ 100°C
- **Accuracy** $\pm 0.1\%$
- **Span Drift** ± 25 ppm/°C
- **Zero Drift** ± 6 μ V/°C
- **Resolution** 16-bit
- **Sampling Rate** 10 sample/ second (total)
CMR @ 50/60 HZ 90dB
NMR @ 50/60 HZ 60dB
- **Wire Burn-out Detection**

Ordering Information

- **ADAM-6015** 7-ch Isolated RTD Input Modbus TCP Module

Specifications

Analog Input

- **Channels** 8 (differential)
- **Input Impedance** > 10 M Ω (voltage)
120 Ω (current)
- **Input Type** mV, V, mA
- **Input Range** ± 150 mV, ± 500 mV, ± 1 V
 ± 5 V, ± 10 V, 0-20 mA, 4-20 mA
- **Accuracy** $\pm 0.1\%$ (voltage)
 $\pm 0.2\%$ (current)
- **Span Drift** ± 25 ppm/°C
- **Zero Drift** ± 6 μ V/°C
- **Resolution** 16-bit
- **Sampling Rate** 10 sample/ second (total)
CMR @ 50/60 HZ 90dB
NMR @ 50/60 HZ 67CMR
@ 50/60 HZ 90dBdB

Digital Output

- **Channels** 2, open collector to 30 V, 100 mA max. load
- **Power Dissipation** 300 mW for each module

Ordering Information

- **ADAM-6017** 8-ch Isolated AI with 2-ch DO Modbus TCP Module

Specifications

Analog Input

- **Channels** 8 (differential)
- **Input Impedance** > 10 M Ω
- **Input Type** Thermocouple
- **Thermocouple Type and Range:**

J	0 ~ 760°C	R	500 ~ 1,750°C
K	0 ~ 1,370°C	S	500 ~ 1,750°C
T	-100 ~ 400°C	B	500 ~ 1,800°C
E	0 ~ 1,000°C		
- **Accuracy** $\pm 0.1\%$
- **Span Drift** ± 25 ppm/°C
- **Zero Drift** ± 6 μ V/°C
- **Resolution** 16-bit
- **Sampling Rate** 10 sample/ second (total)
CMR @ 50/60 HZ 90dB
NMR @ 50/60 HZ 60dB
- **Wire Burn-out Detection**

Digital Output

- **Channels** 8, open collector to 30 V, 100 mA max. load
- **Power Dissipation** 300 mW for each module

Ordering Information

- **ADAM-6018** 8-ch Isolated Thermocouple Input Modbus TCP Module w/ 8-ch DO

Common Specifications

General

- **LAN** 10/100Base-T(X)
- **Power Consumption** 2 W @ 24 V_{DC}
- **Connectors** 1 x RJ-45 (LAN), Plug-in screw terminal block (I/O and power)
- **Watchdog** System (1.6 second) and Communication (programmable)
- **Power Input** 10 ~ 30 V_{DC}

- **Supports Peer-to-Peer**
- **Supports GCL**
- **Supports Modbus/TCP, TCP/IP, UDP and HTTP Protocols**

Protection

- **Over Voltage Protection** ± 35 V_{DC}
- **Isolation Protection** 2,000 V_{DC}
- **Built-in TVS/ESD Protection**
- **Power Reversal Protection**

Environment

- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
- **Operating Humidity** 20 ~ 95% RH (non-condensing)
- **Storage Humidity** 0 ~ 95% RH (non-condensing)

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com