

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [171856-0006](#)
Status: **Active**
Overview: [KK® Interconnect System - Molex](#)
Description: 2.54mm Pitch, KK® 254 RPC Vertical Header with Friction Lock, Tin (Sn) Plating, Pin Length 12.95mm, Bag, 6 Circuits

Documents:

| | |
|--|--|
| 3D Model | Product Specification PS-171856-0002 (PDF) |
| Drawing (PDF) | Test Summary TS-171856-0001 (PDF) |
| Product Specification PS-171856-0001 (PDF) | RoHS Certificate of Compliance (PDF) |

Agency Certification


| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|----------------|--|
| Product Family | PCB Headers |
| Series | 171856 |
| Application | Board-to-Board, Power, Signal, Wire-to-Board |
| Comments | See Product Specification for maximum current rating by AWG. See Product Specification for operating temperature range by material. |
| Overview | KK® Interconnect System - Molex |
| Product Name | KK® 254 |
| UPC | 887191376424 |

Physical

| | |
|--------------------------------|--------------------------------|
| Breakaway | No |
| Circuits (Loaded) | 6 |
| Circuits (maximum) | 6 |
| Color - Resin | Black |
| Durability (mating cycles max) | 25 |
| First Mate / Last Break | No |
| Flammability | 94V-1 |
| Glow-Wire Compliant | Yes |
| Guide to Mating Part | No |
| Keying to Mating Part | None |
| Lock to Mating Part | Yes |
| Material - Metal | Brass |
| Material - Plating Mating | Matte Tin |
| Material - Plating Termination | Matte Tin |
| Material - Resin | High Temperature Thermoplastic |
| Net Weight | 0.678/g |
| Number of Rows | 1 |
| Orientation | Vertical |
| PCB Locator | No |
| PCB Retention | None |
| PCB Thickness - Recommended | 1.60mm |
| Packaging Type | Bag |
| Pitch - Mating Interface | 2.54mm |
| Plating min - Mating | 1.524µm |
| Plating min - Termination | 1.524µm |
| Polarized to Mating Part | Yes |
| Shrouded | Partial |
| Stackable | No |
| Surface Mount Compatible (SMC) | Yes |

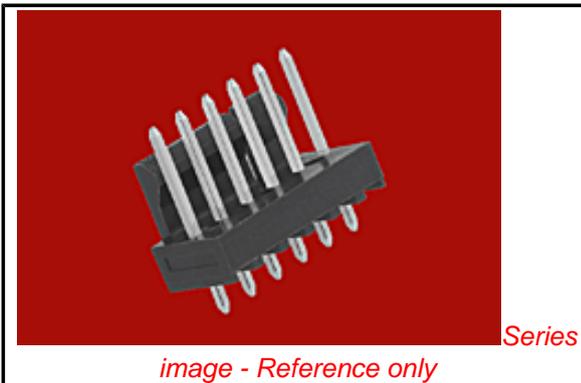

EU RoHS

ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Low-Halogen Status
Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

171856Series

Mates With

4455 , 2695 , 6471

Temperature Range - Operating -40°C to +105°C, -40°C to +80°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 4.0A
Voltage - Maximum 250V

Solder Process Data

Duration at Max. Process Temperature (seconds) 30
Lead-free Process Capability SMC & Wave Capable (TH only)
Max. Cycles at Max. Process Temperature 3
Process Temperature max. C 260

Material Info

Reference - Drawing Numbers

Product Specification PS-171856-0001, PS-171856-0002
Sales Drawing SD-171856-0001
Test Summary TS-171856-0001

This document was generated on 05/08/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com