



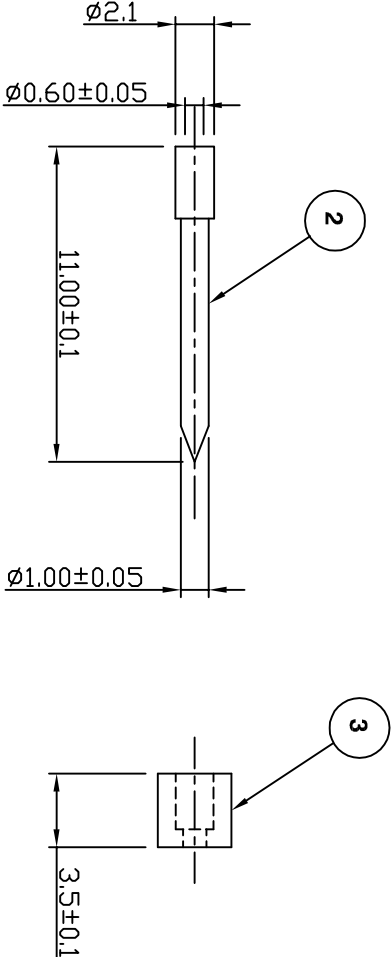

For stripping and assembly instructions see Drawing Number: VAIF1107

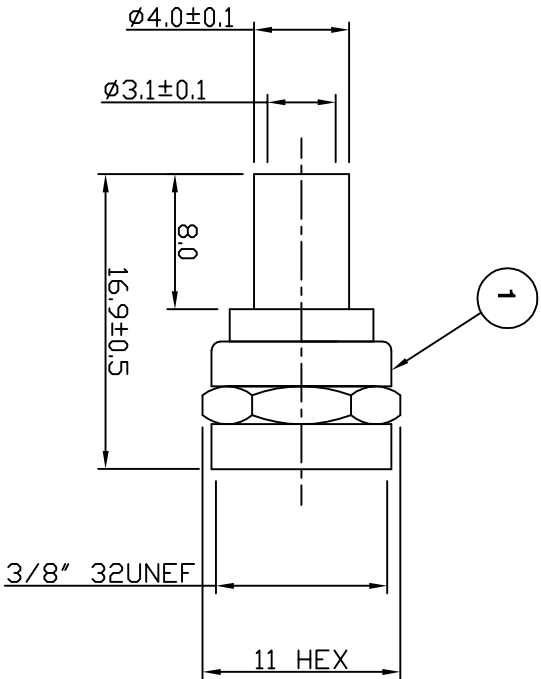

Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford, Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 35938

SCALE: Not To Scale
DIMENSIONS: mm
TOLERANCES:
± 0.2mm unless
otherwise stated

DRAWN BY:
CHECKED BY:
APPROVED BY:

P D Couzens

P D Couzens

S Nash

DATE: 29 May 02

TITLE:

F Crimp Plug For RG179

PART NUMBER:

VF10-2061

PAGE: 1 of 1

Electrical Characteristics

Nominal Impedance: Non Constant
Frequency Range: DC to 2 GHz
VSWR: 1.35:1 maximum
Insertion Loss: 0.2 dB at 2 GHz
Operating Voltage (rms): 250 V maximum at sea level
Dielectric Withstand Voltage (rms): 1500 V maximum at sea level
Contact Resistance: 3.0 milliohms maximum
Insulation Resistance: 5000 megohms minimum

Mechanical Characteristics


Mating Cycles: 50 cycles (subject to cable)
Interface Dimensions: Conform to MIL-C-39012

Environmental Characteristics

Temperature Range: -65 °C to +165 °C

PART	DESCRIPTION
1	Body
2	Contact
3	Dielectric

Strip & Crimp Dims Added	MS	5	24 Aug 09
Address	MS	4	17 Mar 09
CAD Issue	PCD	3	29 May 02
Pin Dimension Change	RCS	2	31 Jul 00
First Issue	PDC	1	19 Jun 00
DESCRIPTION OF REVISION	APPVD	ISS	DATE



Ferrule	Contact
3.25 HEX	1.69 HEX

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com