

## Features

- High Power Handling
- Low Loss / Low Distortion
- Low Thermal Resistance
- Leadless Low Inductance MELF Package
- Available as a Chip
- Surface Mountable
- RoHS Compliant
- MSL 1

## Description

M/A-Com's MELF packaged PIN diode line encompasses a comprehensive range of electrical characteristics. The particular die in the MA4P504-1072T utilizes M/A-Com's unique CERMACHIP passivation process which provides for a hard glass encapsulation that hermetically seals the active area of the chip. This packaged CERMACHIP PIN diode is ideally suited for use in high power applications where high RF voltages are present.

The chip is enclosed in a rugged ceramic Metal Electrode Leadless Faced (MELF) surface mount package and is full face bonded to refractory metal pins on both the anode and cathode. The result is a low loss PIN diode with low thermal resistance due to symmetrical thermal paths. This rectangular PIN diode is designed for high volume tape and reel assembly. This user friendly package design provides for extremely easy automatic pick and place, indexing and assembly. All solderable surfaces are tin plated and compatible with industry standard reflow and vapor phase soldering processes.


## Applications

The MA4P504-1072T MELF packaged PIN diode is suitable for usage in high incident power series, shunt, or series-shunt switches as well as attenuator applications from HF through UHF frequencies.

## Ordering Information

Part Number	Package
Ma4P504-1072T	Tape and Reel

## Package Style (ODS 1072) Outline Drawing

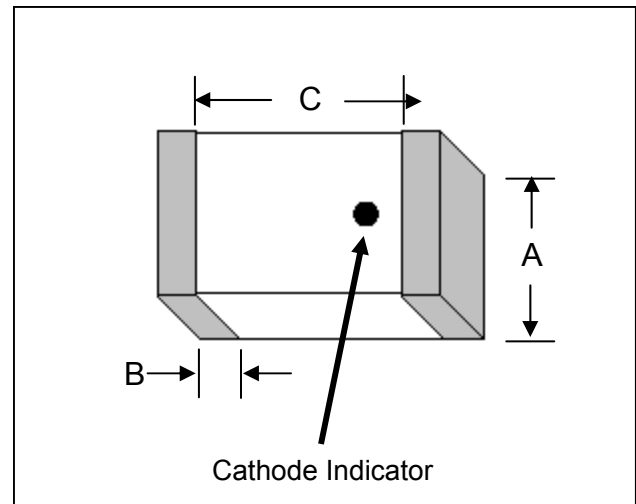

Dimensions	Package Style 1072	
	in	mm
A	0.093	2.36
B	0.050	1.27
C	0.060	1.52

## Absolute Maximum Ratings<sup>1,2</sup> @ 25°C

Parameter	Absolute Maximum
Forward Voltage	1.0 V
Reverse Voltage	500V
Operating Temperature	-65°C to +175°C
Storage Temperature	-65°C to +200°C
Mounting Temperature	+260°C for 30 seconds

1. Exceeding these limits may cause permanent damage to the device.
2. Values will derate over temperature.


## Electrical Specifications @ $T_A = +25^\circ\text{C}$

Parameters	Symbols	Conditions	Units	Min.	Typ.	Max.
Total Capacitance	$C_{T100V}$	-100 V @ 1 MHz	pF	—	—	0.50
Package Capacitance <sup>1</sup>	$C_p$	—	pF	—	0.16	—
Series Resistance	$R_S$	+100 mA @ 100 MHz	$\Omega$	—	—	0.60
Minority Carrier Lifetime	$T_L$	$I_F = 10\text{ mA}$ $I_R = -6\text{ mA}$	$\mu\text{S}$	—	1.0	—
Forward Voltage	$V_F$	+ 50 mA	V	—	—	1.0
Reverse Leakage Current	$-I_R$	-500 V	$\mu\text{A}$	—	—	- 10
Thermal Resistance	$\theta$	—	$^\circ\text{C} / \text{W}$	—	15	—
Power Dissipation	$P_d$	—	W	—	—	10
3rd Order Input Intermodulation Distortion	IIP3	+10dBm Input Power 1000 MHz 1 MHz Spacing	dBm	—	>54	—


1. Package capacitance is for the MELF-1072 package style. Total capacitance  $C_t$  = Junction Capacitance  $C_j$  + Package Capacitance  $C_p$

## Typical DC Performance Curves

Series Resistance vs. Forward Current

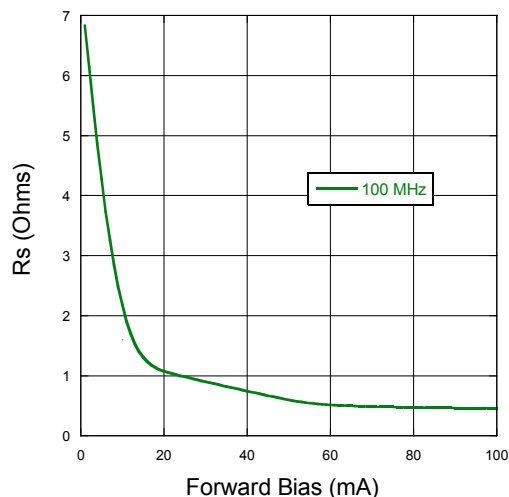

Capacitance vs. Reverse Voltage

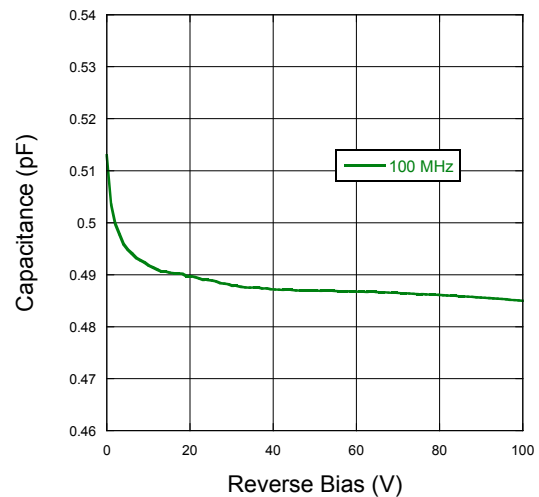


## APPLICATIONS SECTION


### Typical RF Performance Curves (50 – 4000 MHz)

#### SERIES DIODE


##### Input Return Loss

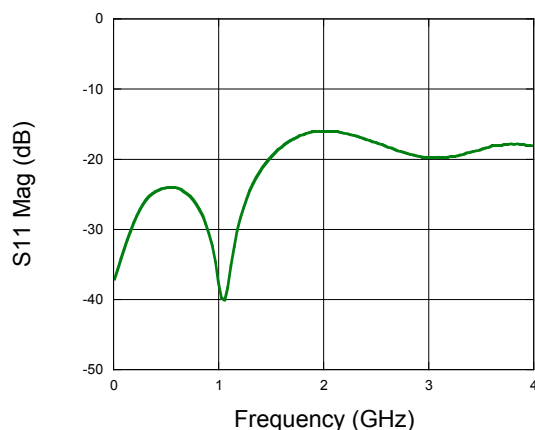


##### Output Return Loss

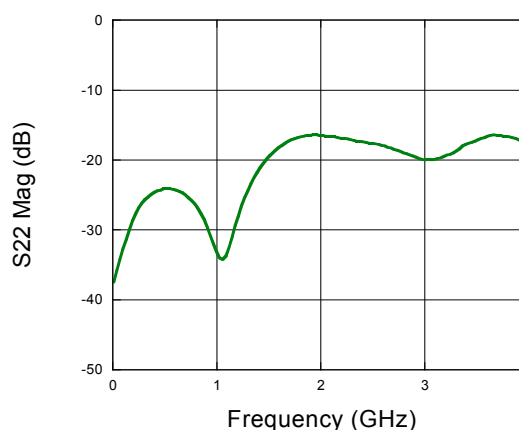

##### Insertion Loss

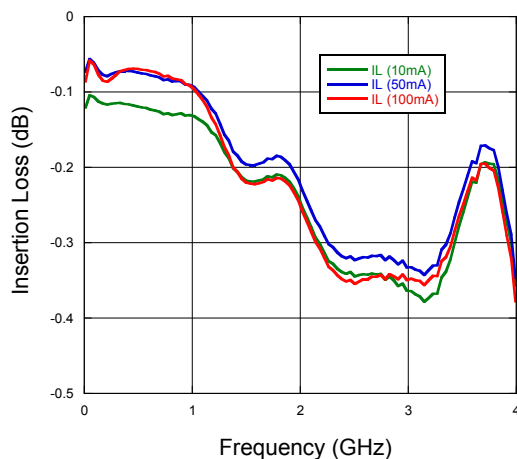

##### Isolation

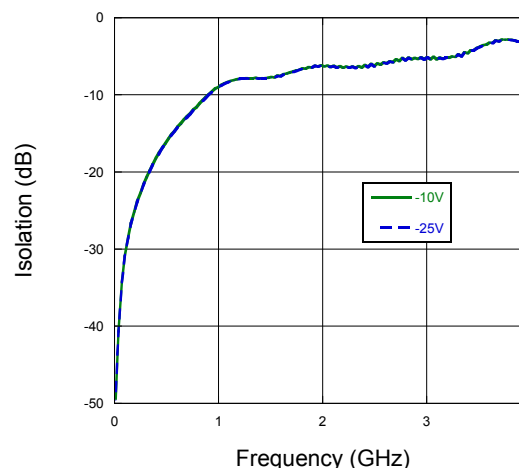


## APPLICATIONS SECTION


### Typical RF Performance Curves (50 – 4000 MHz)

#### SHUNT DIODE


##### Input Return Loss

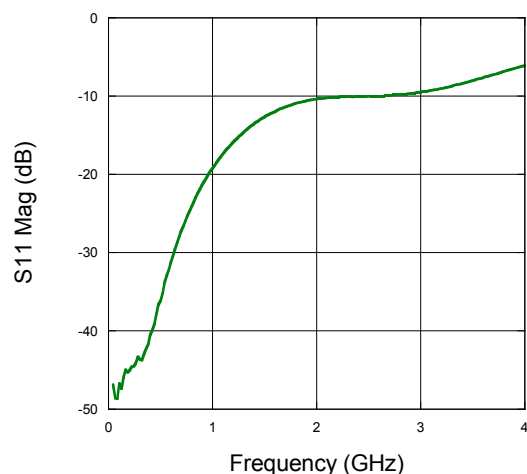


##### Output Return Loss

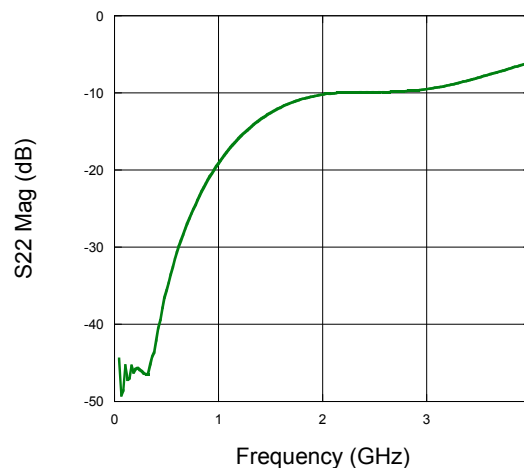

##### Insertion Loss

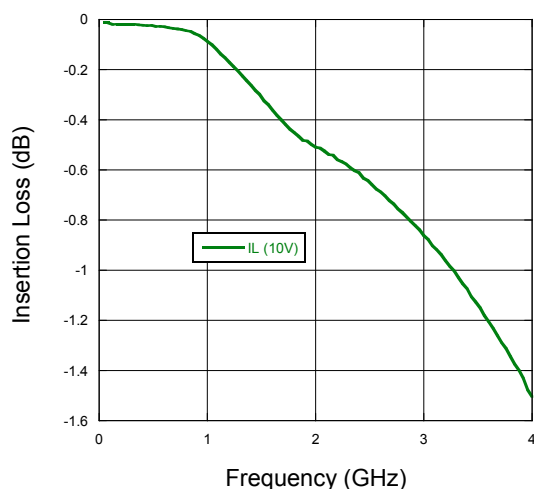

##### Isolation

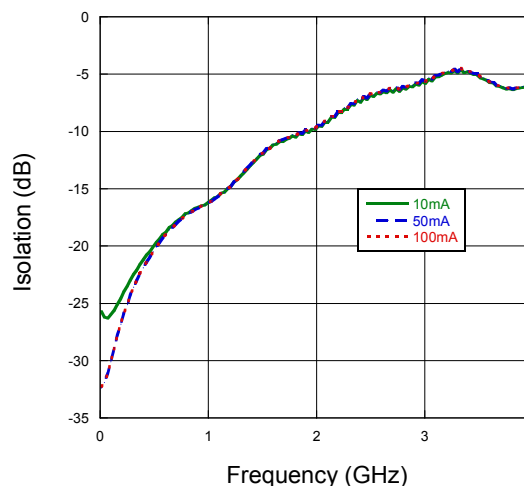

## Assembly Recommendations

- Devices may be soldered using standard 63/37, Sn/Pb or RoHS compliant solders. Leads are tin plated 50µM thick to ensure an optimum connection.
- For recommended Sn/Pb and RoHS soldering profile See Application Note [M538](#) on the M/A-COM website.

## Handling Procedures

The following precautions should be observed to avoid damaging these devices.

## Cleanliness and Storage

These devices should be handled and stored in a clean environment. Ends of the device are tin plated for greater solderability. Continuous exposure to high humidity (>80%) for extended periods may cause the surface to oxidize. Caution should be taken when storing devices for long periods.

## ESD

These devices are susceptible to ESD and are rated Class 1C.

## General Handling

Device can be handled with tweezers or vacuum pickups and are suitable for use with automatic pick-and-place equipment.

**Note:** To compare other MELF packaged diodes to the MA4P504-1072, please click on the link to an older version datasheet:  
[PACKAGED PIN DIODES](#)


## RoHS

The MA4P504-1072 is fully RoHS compliant meaning it contains less than the maximum allowable concentration of 0.1% by weight in homogenous materials for lead, hex chrome, mercury, PBB, PBDE, and 0.01% for cadmium.

## Mounting Techniques

### Solder Attach

Typical wave soldering or reflow techniques may be used to mount M/A-COM's SMQ packages to circuit boards using Sn63/Pb37 alloy or RoHS compliant solders. For more information visit the M/A-COM website and read application note [M538](#).

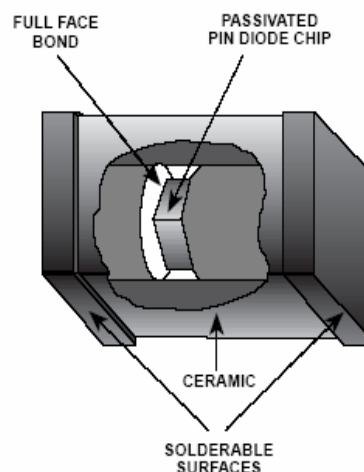

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email        amall@ameya360.com  
  
QQ            800077892  
  
Skype        ameyasales1 ameyasales2

➤ Customer Service :

Email        service@ameya360.com

➤ Partnership :

Tel            +86 (21) 64016692-8333  
  
Email        mkt@ameya360.com