



Schottky Diode Gen²

$$\begin{aligned} V_{RRM} &= 200 \text{ V} \\ I_{DAV} &= 2 \times 65 \text{ A} \\ V_F &= 0.67 \text{ V} \end{aligned}$$

High Performance Schottky Diode
Low Loss and Soft Recovery
Parallel Legs

Part number
DSA120X200LB

Preliminary data

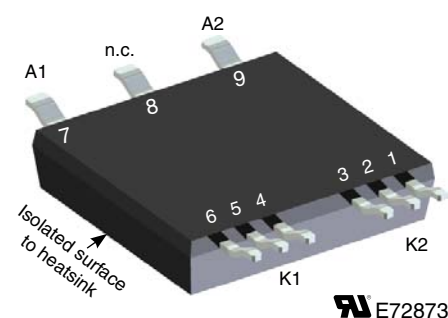

Features / Advantages:

- Very low V_F
- Extremely low switching losses
- Low I_{RM} values
- Improved thermal behaviour
- High reliability circuits operation
- Low voltage peaks for reduced protection circuits
- Low noise switching

Applications:


- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Package: SMPD

- Isolation Voltage: 3000 V~ ($t = 1s$)
- Industry convenient outline
- RoHS compliant
- Soldering pins for PCB mounting
- Backside: DCB ceramic
- Reduced weight
- Advanced power cycling

Schottky				Ratings			
Symbol	Definitions	Conditions		min.	typ.	max.	
V_{RSM}	max. non-repetitive rev. blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				200	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				200	V
I_R	reverse current, drain current	$V_R = 200\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$			1 5	mA mA
V_F	forward voltage drop	$I_F = 60\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			0.98	V
		$I_F = 120\text{ A}$				1.22	V
		$I_F = 60\text{ A}$	$T_{VJ} = 150^{\circ}\text{C}$			0.82	V
		$I_F = 120\text{ A}$				1.10	V
I_{FAV}	average forward current	rectangular; $d = 0.5$	$T_C = 130^{\circ}\text{C}$			65	A
V_{F0}	threshold voltage	} for power loss calculation only	$T_{VJ} = 175^{\circ}\text{C}$			0.51	V
r_F	slope resistance					2.7	m Ω
R_{thJC}	thermal resistance junction to case					0.8	K/W
R_{thJH}	thermal resistance case to heatsink	with thermal transfer paste (IXYS test setup)			1.05	1.25	K/W
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$				185	W
I_{FSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}; V_R = 0\text{ V}$	$T_{VJ} = 45^{\circ}\text{C}$			700	A
C_J		$V_R = 24\text{ V}; f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		395		pF

Package SMPD			Ratings			
Symbol	Definitions	Conditions	min.	typ.	max.	
I_{RMS}	RMS current	wide pin standard pin			100 60	A A
T_{stg}	storage temperature		-55		150	°C
T_{op}	operation temperature		-55		150	°C
T_{VJ}	virtual junction temperature		-55		175	°C
Weight				8.5		g
F_C	mounting force with clip		40		130	N
$d_{Spp/App}$	creepage distance on surface /	terminal to terminal	1.6			mm
$d_{Spb/Apb}$	striking distance through air	terminal to backside	4.0			mm
V_{ISOL}	isolation voltage	$t = 1$ second $t = 1$ minute		3000 2500		V V
					50/60 Hz; RMS; $I_{ISOL} < 1$ mA	

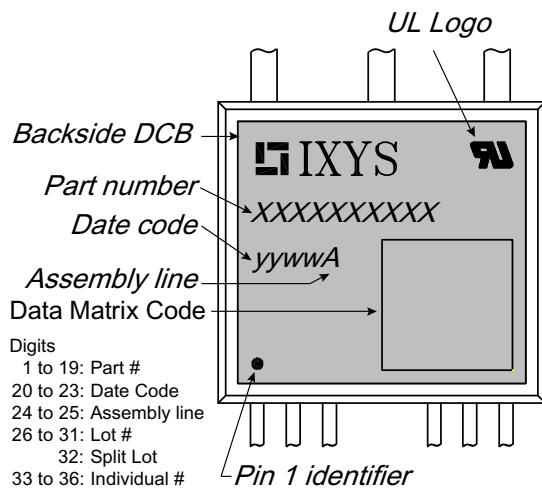

Part number


D = Diode
S = Schottky Diode
A = low V_F
120 = Current Rating [A]
X = Parallel legs
200 = Reverse Voltage [V]
LB = SMPD-B

Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Ordering Code
Standard	DSA120X200LB-TRR	DSA120X200LB-TRR	Tape&Reel	200	
	DSA120X200LB	DSA120X200LB	Blister	45	512873

Equivalent Circuits for Simulation

*on die level



$T_{VJ} = 175^\circ\text{C}$



Schottky

$V_{0\max}$	threshold voltage	0.51	V
$R_{0\max}$	slope resistance *	2.7	mΩ

Outlines SMPD

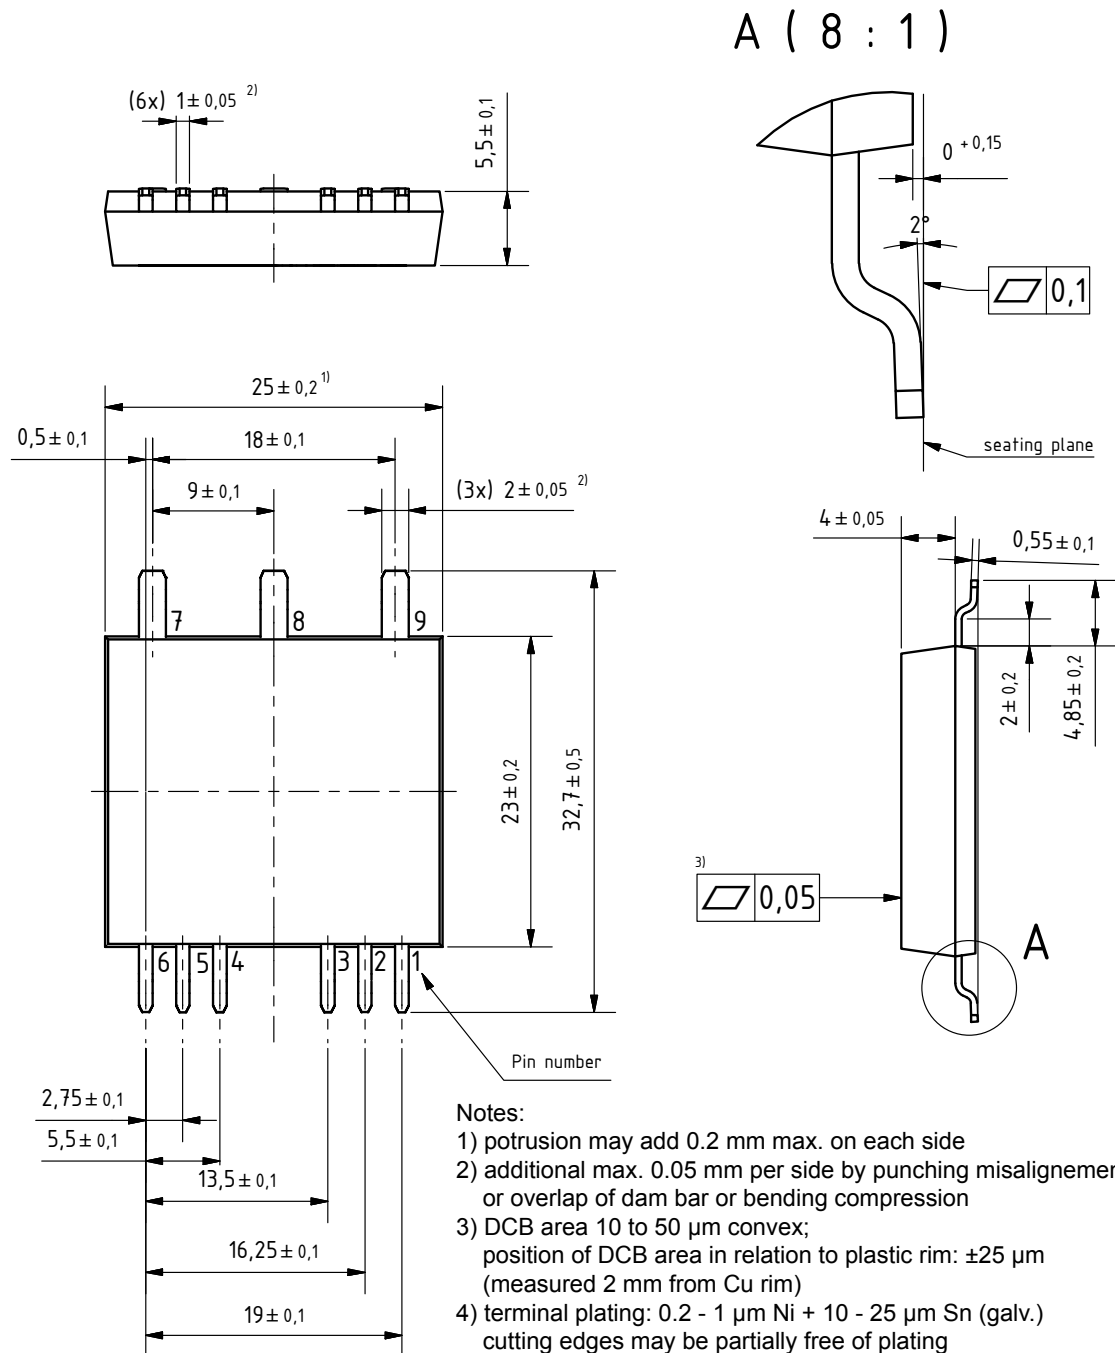

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com