


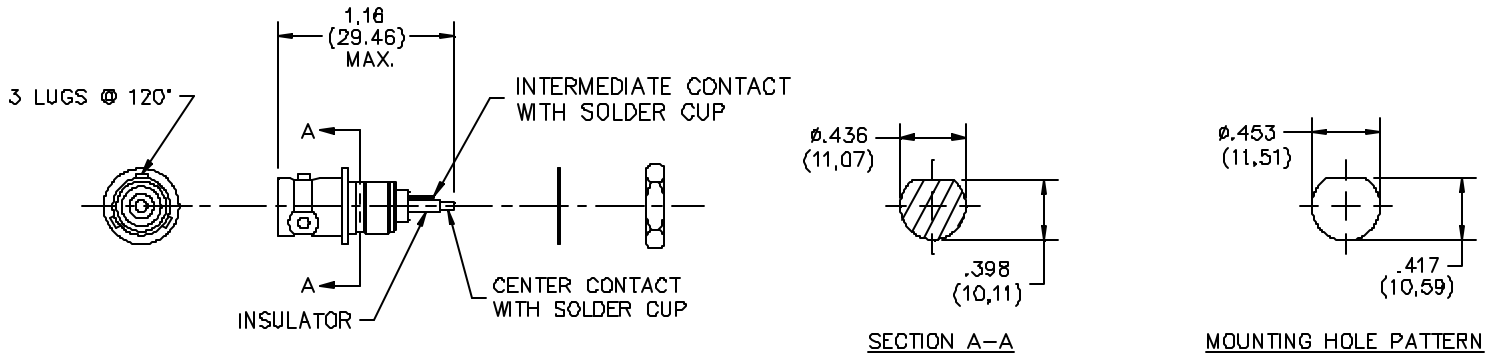

MATERIALS:

Body/Fittings: Brass per QQ-B-626, Alloy 360, ½ Hard
Tarnish Resistant

Dielectric: Teflon per MIL-P-19468

Center Contact: Gold Plated Beryllium Copper per QQ-C-530, Cond. HT. & MIL-C-49142.

Marking: "POMONA 5219"

RATINGS:

Operating Voltage: 500 VRMS

Nominal Impedance: 50 Ohms

Frequency Range: DC to 500 MHZ

Operating Temperature: -65°C to +165°C

ORDERING INFORMATION: Model 5219

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Made in USA

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com