

## CP2725AC48TEZ-FB Compact Power Line High Efficiency Rectifier

Input: 100-120/220-240 Vac; Output: 2725W<sup>1</sup> @ 52Vdc; 5 Vdc @ 4W



### Features

- Efficiency 95%
- Compact 1RU form factor providing 30 W/in<sup>3</sup>
- 2725W @ 52V from nominal 220 – 240Vac
- 1200W from nominal 100 – 120Vac (for  $V_o > 42Vdc$ )
- Output voltage programmable from 18V – 53Vdc
- PMBus compliant dual I<sup>2</sup>C and RS485 serial busses
- Power factor correction (meets EN/IEC 61000-3-2 and EN 60555-2 requirements)
- Output overvoltage and overload protection
- AC Input overvoltage and undervoltage protection
- Over-temperature warning and protection
- Redundant, parallel operation with active load sharing
- Redundant +5V Aux power
- Remote ON/OFF
- Hot insertion/removal (hot plug)
- Four front panel LED indicators
- UL\* Recognized to UL60950-1, CAN/ CSA† C22.2 No. 60950-1, and VDE‡ 0805-1 Licensed to IEC60950-1
- CE mark meets 2006/95/EC directive§
- Internally controlled Variable-speed fan
- RoHS 6 compliant
- Special Foldback Curve

### Applications

- Wide band power amplifiers

### Description

The CP2725AC48TEZ-FB Rectifier has an extremely wide programmable output voltage capability and fold-back current limiting features. High-density front-to-back airflow is designed for minimal space utilization and is highly expandable for future growth. This custom rectifier incorporates both RS485 and dual-redundant I<sup>2</sup>C communications busses that allow it to be used in a broad range of applications. Feature set flexibility makes this rectifier an excellent choice for a set of applications requiring operation over a wide output voltage range.

\* UL is a registered trademark of Underwriters Laboratories, Inc.

† CSA is a registered trademark of Canadian Standards Association.

‡ VDE is a trademark of Verband Deutscher Elektrotechniker e.V.

§ This product is intended for integration into end-user equipment. All the required procedures for CE marking of end-user equipment should be followed. (The CE mark is placed on selected products.)

\*\* ISO is a registered trademark of the International Organization of Standards.

<sup>1</sup> High line operation. The unit current limits below 52V and therefore the available output power below 52V operation is reduced.



imagination at work

## CP2725AC48TEZ-FB Rectifier

Input: 100-120/220-240 Vac; Output: 2725W<sup>1</sup> @ 52Vdc; 5 Vdc @ 4W

## Electrical Specifications

| Input  |                |                            |            |       |  |
|--|----------------|----------------------------|------------|-------|--|
| Parameter  | Min            | Typ                        | Max        | Units | Notes  |
| Startup Input Voltage<br>Low-line Operation<br>High-line Operation           |                |                            | 90<br>200  |       |  |
| Operating Voltage Range<br>Low-line Configuration<br>High-line Configuration | 90<br>200      | 100, 110, 120<br>220 - 240 | 140<br>265 | Vac   |  |
| Surges (no damage)   | 305            |                            |            |       |  |
| Input Frequency  | 47             |                            | 66         | Hz    |  |
| Input Current  |                |                            | 12<br>13.5 | A     | At 110 Vac<br>At 240 Vac   |
| Inrush Transient   |                | 25                         | 30         | Apk   | Measured at 25°C for all line conditions; does not include X-Capacitors charging.  |
| Input Leakage Current  |                | 2.5                        | 3.5        | mA    | Measured at 265Vac, 60Hz   |
| Power Factor   | 0.96           | 0.98                       |            |       | From 50% to 100% (2725W @ HL, 1200W @ LL). load  |
| Efficiency <sup>2</sup>  | 20 – 90% of FL | 93                         | 95         | %     | With or'ing function, aux 5V output, dual/redundant I <sup>2</sup> C and RS485 communications and POE isolation<br>>20% load<br>Test condition: input; 240Vac, 60hz, output; 52Vdc |
|  | >38V           | 85                         |            | %     |  |
| Holdup   |                | 20<br>30                   |            | ms    | 48Vdc, Measurement starts at zero crossing of the ac voltage, and voltage decayed to 40V.<br>← For loads below 1200W.  |
| Ride thru  | 1/2            | 1                          |            | cycle | Tested at nominal 115V and 230V. Complies to CISPR24 standards   |
| Power Fail Warning <sup>3</sup>  | 3              | 5                          |            | ms    | Alarm issued via PFW signal going LO 5 ms prior to the main output decaying below 40Vdc.   |


| Main Output                     |              |     |            |       |  |
|---------------------------------|--------------|-----|------------|-------|--|
| Parameter                       | Min          | Typ | Max        | Units | Notes  |
| Output Power                    | 1200<br>2725 |     |            | W     | Above 52Vdc from nominal 90-120Vac upto 55°C.<br>Above 52Vdc from nominal 200-265Vac upto 55°C |
| Default Set point               |              | 48  |            | Vdc   | Output floats with respect to frame ground.  |
| Overall Regulation <sup>4</sup> | -1<br>-2     |     | +1<br>+2   | %     | 0 – 45C, minimum load 2.5A<br>> 45C  |
| Output Voltage Set Range        | 18           |     | 53         | Vdc   | Analog margining and RS485   |
|                                 | 18           |     | 53         | Vdc   | Set by I <sup>2</sup> C  |
| Output current                  | 1<br>1       |     | 23<br>52.4 | A     | 1200W @ 52V @ 90-120Vac.<br>2725W @ 52V @ 200-240Vac.  |

<sup>2</sup> At 52Vdc, 240Vrms and 25°C.<sup>3</sup> Internal protection circuits may override the PFW signal and may trigger an immediate shutdown.<sup>4</sup> Includes all variations due to specified load range, drift, and environmental conditions.

## CP2725AC48TEZ-FB Rectifier

Input: 100-120/220-240 Vac; Output: 2725W<sup>1</sup> @ 52Vdc; 5 Vdc @ 4W

## Electrical Specifications (continued)
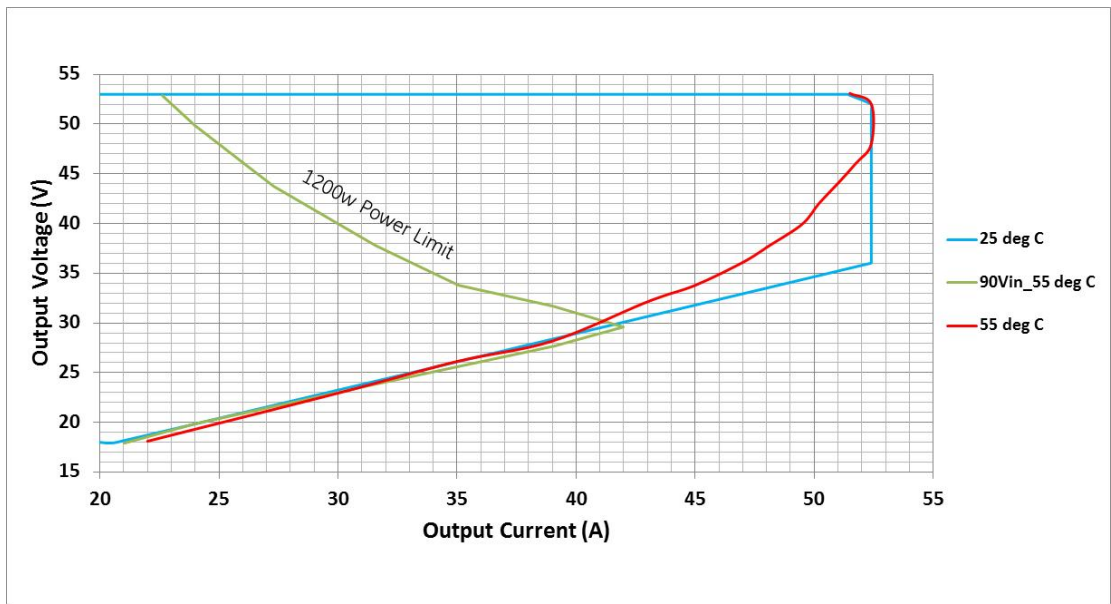
| Main Output (continued)        |  |  |     |         |         |  |
|--------------------------------|--|--|-----|---------|---------|--|
| Parameter                      |  | Min  | Typ | Max     | Units   | Notes  |
| Current Share                  | $V_o > 42V$<br>$V_o < 42V$   | -5<br>-10  |     | 5<br>10 | %FL     | Compared to the average output current delivered by a set of Rectifiers. Loads > 50% FL  |
| Output Ripple                  |  |  |     |         |         |  |
| RMS (5Hz to 20MHz)             |  |  | 60  | 100     | mVrms   | Measured with 20MHz bandwidth under any condition of loading. Minimum load is 1A.  |
| Peak-to-Peak (5Hz to 20MHz)    |  |  |     | 500     | mVp-p   |  |
| External Bulk Load Capacitance |  | 0  |     | 5,000   | $\mu F$ | External capacitance can be increased but the rectifier will not meet its turn-ON rise time requirement.                                 |
| Turn-On                        |  |  |     |         |         | Monotonic Turn_On from 30% to 100% of Vnom above -5°C operation. Monotonic Turn_On from 60% to 100% of Vnom below -5°C operation.        |
| Delay                          |  |  | 5   |         | s       |  |
| Rise Time - Standard (PMBus)   |  |  | 100 |         | ms      |  |
| -Telecom (RS-485) <sup>5</sup> |  |  | 5   |         | s       |  |
| Overshoot                      |  |  |     | 2       | %       |  |
| Load Step Response             |  |  |     |         |         | $\Delta I/\Delta t$ slew rate 1A/ $\mu s$ .<br>Settling time to within regulation requirements.<br>Minimum load of 2.5 amperes required. |
| $\Delta I$                     |  |  | 2.0 | 50      | %FL     |  |
| $\Delta V$                     |  |  | 2   |         | Vdc     |  |
| Response Time                  |  |  |     |         | ms      |  |
| Permissible Load Boundary      | Power Limit - high line  | 2725   |     |         | W       | Down to 51Vdc  |
|                                | Power limit - low line   | 1200   |     |         | W       |  |
|                                | The overload current limit threshold should be set $\approx 5\%$ above the load envelope shown here  |  |     |         |         |  |
|                                |  <p>The graph plots Output Voltage (V) on the y-axis (15 to 55) against Output Current (A) on the x-axis (20 to 55). Three curves are shown: a blue line for 25 deg C, a green curve for 90Vin_55 deg C, and a red line for 55 deg C. A green curve labeled '1200W Power Limit' slopes downwards from left to right. The 25 deg C and 55 deg C lines are relatively flat, while the 90Vin_55 deg C line follows the power limit curve.</p> |  |     |         |         |  |
|                                | Contract terms are for supporting all loads inside the load map. The customer will develop a control interface which maintains the operating voltage and current so as to not exceed the load map.   |  |     |         |         |  |
|                                | System Power Up  | Units should be able to be plugged in one at a time and guarantee system start up. Units should stay in current limit for approximately 20 seconds to guarantee restart. |     |         |         |  |

<sup>5</sup> Below -5°C, the rise time is approximately 5 minutes to protect the bulk capacitors.

## CP2725AC48TEZ-FB Rectifier

Input: 100-120/220-240 Vac; Output: 2725W<sup>1</sup> @ 52Vdc; 5 Vdc @ 4W

## Electrical Specifications (continued)

| Main Output (continued)   |   |  |  |    |     |   |
|---|---|--|--|----|-----|---|
| Over-voltage  | Delayed   |  |  | 60 | Vdc | 200msec delayed shutdown to be implemented.<br>Instantaneous shutdown above this point.                       |
|   | Immediate Latchoff  |  |  | 65 | Vdc |   |
|   |   | Three restart attempts may be implemented within a one minute window prior to a latched shutdown |  |    |     |   |
| Over-temperature  |   |  |  |    |     | Implemented prior to commencement of an OT shutdown<br>Below the maximum rating of the device being protected |
| Warning   |   | 5  |  | °C |     |   |
| Shutdown  |   | 20   |  | °C |     |   |
| Auto-recoverable  | Temperature hysteresis of approximately 10°C provided between shutdown and restart. |  |  |    |     |   |
| Overcurrent events that exceed the envelope by 5% will hiccup continuously at a frequency of approximately once every 20 seconds. For voltage set-points below 42V, a tracking Under Voltage shutdown occurs at 2 volts below set-point. UV must exhibit for more than 1 second before shutdown. UV shutdown will exhibit the same 20 second hiccup behavior. |   |  |  |    |     |   |

## Electrical Specifications (continued)

| Auxiliary Output        |       |     |      |         |                                 |
|-------------------------|-------|-----|------|---------|---------------------------------|
| Parameter               | Min   | Typ | Max  | Units   | Notes                           |
| Output Voltage Setpoint |       | 5   |      | Vdc     |                                 |
| Output Current          | 0.005 |     | 0.75 | A       |                                 |
| Overall Regulation      | -10   |     | +5   | %       | Within ±5% when load is < 0.5A. |
| Ripple and Noise        |       | 50  | 100  | mVpk-pk | 20MHz bandwidth                 |
| Over-voltage Clamp      |       |     | 7    | Vdc     |                                 |
| Over-current Limit      | 110   |     | 175  | %FL     |                                 |

## CP2725AC48TEZ-FB Rectifier

Input: 100-120/220-240 Vac; Output: 2725W<sup>1</sup> @ 52Vdc; 5 Vdc @ 4W

| Environmental, EMC, Reliability Specifications   |   |         |               |                            |   |
|--|---|---------|---------------|----------------------------|---|
| Environmental  |   |         |               |                            |   |
| Parameter  | Min   | Typ     | Max           | Units                      | Notes   |
| Ambient Temperature<br>Operating<br>Derating   | -40 <sup>6</sup>  | 1       | 55<br>2       | °C<br>°C                   | Air inlet from sea level to 5,000 feet.<br>Per 1,000 feet above 5,000 feet.   |
| Storage Temperature  | -40   |         | 85            | °C                         |   |
| Humidity   | 5   |         | 95            | %                          | Relative humidity, non-condensing   |
| Altitude   | -60<br>-200   |         | 4000<br>13000 | m<br>ft                    | For operation above 2500m (5000 ft.), maximum operating temperature is derated by 2°C per 305m (1000 ft.).                                      |
| Shock and Vibration  |   |         |               |                            | IPC9592 sections 5.2.8 – 5.2.13   |
| Earthquake Rating  | 4   |         |               | Zone                       | Per Telcordia GR-63-CORE, all floors, when installed in CP Shelf.   |
| Acoustic Noise   |   | 55      |               | dba                        | Noise is proportional to fan speed, load and ambient temperature.   |
| Harmonic Emissions   | Per EN/IEC61000-3-2   |         |               |                            |   |
| Radiated Emissions <sup>7</sup>  | Exceeds FCC and CISPR22 (EN55022) - Class A by a 6dB margin   |         |               |                            |   |
| Conducted Emissions - ac   | Exceeds FCC and CISPR22 (EN55022) Class A<br>Telcordia GR-1089-CORE - Class A by a 6dB margin   |         |               |                            |   |
| ESD  | Error free per EN/IEC 61000-4-2 Level 3 (6 kV contact discharge, 8 kV air discharge).   |         |               |                            |   |
| Radiated Immunity  | Error free per EN/IEC 61000-4-3 Level 3 (10 V/m).   |         |               |                            |   |
| Electrical Fast Transient Burst  | Error free per EN/IEC 61000-4-4 Level 3 (2 kV, 5 kHz repetition rate)   |         |               |                            |   |
| Lightning Surge, Error Free<br>Damage Free   | EN/IEC61000-4-5 Level 4 (4 kV common mode, 2 kV differential mode).<br>ANSI C62.41 Level A3 (6 kV common and differential mode)   |         |               |                            |   |
| Line sags and interruptions  | IPC9592A issued May 2010 ; 1 cycle interruption or 25% sag (115V, 230V – nominal for UUT) for 2 seconds the output shall stay above 40Vdc at full load. [Note: An input sag below 80V may cause an immediate shutdown.] |         |               |                            |   |
| Conducted Immunity   | Error free per EN/IEC 61000-4-6 Level 3 (10Vrms).   |         |               |                            |   |
| Reliability (calculated)   |   | 450,000 |               | Hours                      | At ambient of 25°C at full load per Telcordia SR-332, issue 2, Reliability Prediction for Electronic Equipment, Method I Case III.              |
| Isolation<br>Input-Chassis/Signals<br>Input - Output<br>Output-Chassis<br>Output-Chassis/Signals | 1500<br>3000<br>500<br>2250   |         |               | Vrms<br>Vrms<br>Vdc<br>Vdc | Per EN60950.<br>Consult factory for testing to this requirement<br>Internal Lineage standard, GR_947<br>POE compliant Rectifier, Per IEEE802.3. |
| Service Life   |   | 10      |               | Years                      | 25°C ambient, full load excluding fans.   |

<sup>6</sup> Designed to start and work at an ambient as low as -40°C, but may not meet operational limits until above -5°C<sup>7</sup> Radiated emissions compliance was met using a Lineage Power shelf. This shelf includes output common and differential mode capacitors that assist in meeting compliance.

## CP2725AC48TEZ-FB Rectifier

Input: 100-120/220-240 Vac; Output: 2725W<sup>1</sup> @ 52Vdc; 5 Vdc @ 4W

### Status and Control

The Rectifier provides three means for monitor/control: analog RS485 or I<sup>2</sup>C.

Details of analog controls are provided in this Technical Requirements under Signal Definitions. GE Energy will provide separate application notes on the RS485 and I<sup>2</sup>C protocol for users to interface to the CPL RECTIFIERS. Contact your local GE Energy representative for details.

### Hot Plug


The Rectifier is designed to accommodate rapid extraction and reinsertion into either RS485 or I<sup>2</sup>C based protocol configurations as set by the *protocol* pin. The protocol state of the Rectifier shall reset immediately after disengagement from the mating connector and the Rectifier will configure itself to the state set by the *protocol* pin upon reinsertion.

### Control Definitions

All signals are referenced to Logic\_GRD unless otherwise noted. See the Signal Definitions Table at the end of this document for further description of all the signals.

### Input Signals

**Margining:** Set point of the Rectifier can be changed via this input pin. Programming can be either a voltage source or a resistance divider. The margining pin is connected to 3.3Vdc via a 10kΩ resistor inside the Rectifier. See graphs below.

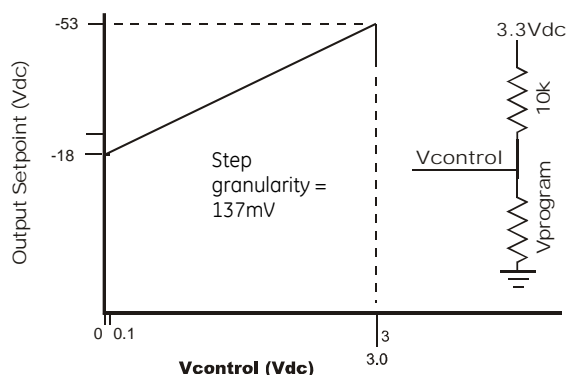

An open circuit on this pin reverts the voltage level back to the original setting of 48V

Software commanded margining overrides the hardware set point indefinitely or until the default setting is reinstated for example if input power and bias power have been removed from the module.

**Module Present Signal:** This signal has dual functionality. It can be used to alert the system when a module is inserted. A 500Ω resistor is present in series between this signal and Logic\_GRD. An external pull-up should not raise the voltage on the pin above 0.25Vdc. Above 1Vdc, the write\_protect feature of the EEPROM is enabled.

**Protocol Select:** Establishes the communications mode of the rectifier, between analog/I<sup>2</sup>C and RS485 modes. For RS485, connect 10kΩ pull-down resistor to 54\_OUT(-DC).

**Enable:** On/Off control when I<sup>2</sup>C communications are utilized as configured by the Protocol pin. This pin must be pulled low to turn **ON** the rectifier. The rectifier will turn **OFF** if either the **Enable** or the **ON/OFF** pin is released. This signal is referenced to Logic\_GRD. This function is not supported in RS485 mode.

**ON/OFF:** This is a short pin utilized for hot-plug applications to ensure that the rectifier turns **OFF** before the power pins are disengaged. It also ensures that the rectifier turns **ON** only after the power pins have been engaged. Must be connected to V\_OUT (-DC).

### Output Signals

**Power Capacity:** A HI on this pin indicates that the rectifier delivers high line rated output power; a LO indicates that the rectifier is connected to low line configured for 1200W operation.

**Power Fail Warning:** This signal is HI when the main output is being delivered and goes LO for the duration listed in this data sheet prior to the output decaying below the voltage level listed in this data sheet.

**Alert #:** I<sup>2</sup>C interrupt signal.

**Fault:** This signal goes LO for any failure that requires Rectifier replacement. Some of these faults may be due to:

- Fan failure, OT shutdown, OV shutdown, Internal fault

**RS485 mode default:** When the unit is powered ON in RS-485 mode the default operational state is powered ON. An RS-485 mode unit shall go to remote standby for any of the following conditions: Interlock Open, or loss of AC.

**RS485 mode rise time:** When the unit is powered ON in RS485 mode the rise time defaults to load current walk-in. The rise time can be configured to be rapid turn-ON independent of the load profile.

**Fan Speed Control:** The fan speed can be instructed to turn faster than what is required by the power supply using either the RS485 or I<sup>2</sup>C protocols. The RS485 command for this feature is:

| Name      | Cmd | Data Bytes | Type  | Notes                        |
|-----------|-----|------------|-------|------------------------------|
| Min_speed | 3Bh | 01h        | Uchar | 00h: 0% default<br>64h: 100% |

## CP2725AC48TEZ-FB Rectifier

Input: 100-120/220-240 Vac; Output: 2725W<sup>1</sup> @ 52Vdc; 5 Vdc @ 4W

### Alarm Table

| Condition                                      | Power Supply LED State |                |                  |              | Monitoring Signals<br>(Referenced to Logic_GRD) |     |                 |                 |
|--|------------------------|----------------|------------------|--------------|---|-----|-----------------|-----------------|
|  | AC OK<br>Green         | DC OK<br>Green | Service<br>Amber | Fault<br>Red | Fault   | OTW | PFW             | Module Present  |
| OK   | 1                      | 1              | 0                | 0            | HI  | HI  | HI              | LO              |
| Thermal Alarm<br>(5C before shutdown)          | 1                      | 1              | 1                | 0            | HI  | LO  | HI              | LO              |
| Thermal Shutdown                               | 1                      | 0              | 1                | 1            | LO  | LO  | LO              | LO              |
| Defective Fan                                  | 1                      | 0              | 0                | 1            | LO  | HI  | LO              | LO              |
| Blown AC Fuse in Unit                          | 1                      | 0              | 0                | 1            | LO  | HI  | LO              | LO              |
| No AC <15mS (single unit)                      | 0                      | 1              | 0                | 0            | HI  | HI  | LO <sup>3</sup> | LO              |
| AC Present but not within limits               | Blinks                 | 0              | 0                | 0            | HI  | HI  | LO              | LO              |
| AC not present <sup>1</sup>                    | 0                      | 0              | 0                | 0            | HI  | HI  | LO              | LO              |
| Boost Stage Failure                            | 1                      | 0              | 0                | 1            | LO  | HI  | LO              | LO              |
| Over Voltage Latched Shutdown                  | 1                      | 0              | 0                | 1            | LO  | HI  | LO              | LO              |
| Over Current                                   | 1                      | Blinks         | 0                | 0            | HI  | HI  | LO              | LO              |
| Non-catastrophic Internal Failure <sup>2</sup> | 1                      | 1              | 0                | 1            | LO  | HI  | HI              | LO              |
| 1 Missing Module                               |                        |                |                  |              |   |     |                 | HI <sup>4</sup> |
| Standby (remote)                               | 1                      | 0              | 0                | 0            | HI  | HI  | LO              | LO              |
| Service Request (PMBus mode)                   | 1                      | 1              | Blinks           | 0            | HI  | HI  | HI              | LO              |
| Communications Fault (RS485 mode)              | 1                      | 1              | 0                | Blinks       | HI  | HI  | HI              | LO              |

<sup>1</sup> This signal is correct if the Rectifier is back biased from other Rectifiers in the shelf.


<sup>2</sup> Any detectable fault condition that does not result in the power supply shutting down. For example, ORing FET failure, boost section out of regulation, etc.

<sup>3</sup> Signal transition from HI to LO is output load dependent

<sup>4</sup> Signal must be pulled HI external to the module

### Output Connector

**Mating Connector:** right angle PWB mate – all pins: AMP 1450572-1, right angle PWB mate except pass-thru input power: AMP 6450378-1

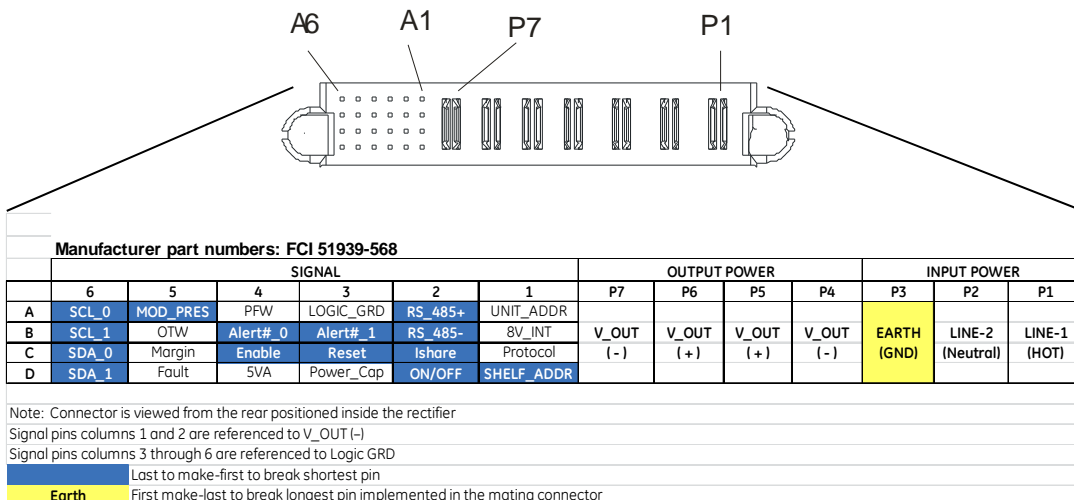

## CP2725AC48TEZ-FB Rectifier

Input: 100-120/220-240 Vac; Output: 2725W<sup>1</sup> @ 52Vdc; 5 Vdc @ 4W

### Signal Definitions

All hardware alarm signals (Fault, PFW, OTW, Power Capacity) are open drain FETs. These signals should be pulled HI to either 3.3V or 5V. Maximum sink current 5mA. An active LO signal (< 0.4Vdc) state. All signals are referenced to Logic GRD unless otherwise stated. Contact your Lineage Power representative for more details.

| Function                   | Label                | Type      | Description   |
|----------------------------|----------------------|-----------|---|
| Output Enable              | Enable               | Input     | If shorted to LOGIC_GRD, the Rectifier output is enabled when using I <sup>2</sup> C mode of operation. May also be toggled to reset a latched OFF Rectifier. Function not available in RS485 mode.                     |
| Power Fail Warning         | PFW                  | Output    | An open drain FET; normally HI, indicating output power is present. Changes to LO at least 5msec before the output voltage decays below 40Vdc.  |
| I <sup>2</sup> C Interrupt | Alert#_0<br>Alert#_1 | Output    | Interrupt signal via I <sup>2</sup> C lines indicating that service is requested from the host controller. This signal pin is pulled up to 3.3V via a 10kΩ resistor and switches to active LO when an interrupt occurs. |
| Rectifier Fault            | Fault                | Output    | Indicates that an internal fault exists. An open drain FET; normally HI, changes to LO.   |
| Module Present             | MOD_PRES             | Output    | Short pin, see Status and Control description for further information on this signal.   |
| ON/OFF                     | ON/OFF               | Input     | Short pin, connects last and breaks first; used to activate and deactivate output during hot-insertion and extraction, respectively. Ref: Vout ( - )  |
| Protocol select            | Protocol             | Input     | See Status and Control description for further information on this signal. Ref: Vout ( - ).   |
| Margining                  | Margin               | Input     | Allows changing of output voltage through an analog voltage input or via resistor divider.  |
| Over-Temperature Warning   | OTW                  | Output    | An open drain FET; normally HI, changes to LO approximately 5°C prior to thermal shutdown.  |
| Power Capacity             | POWER_CAP            | Output    | Open drain FET; Used to indicate Rectifier operation mode; HI indicates 2725W operation and LO indicates 1200W operation.   |
| Rectifier address          | Unit_addr            | Input     | Voltage level addressing of Rectifiers within a single shelf. Ref: Vout ( - ).  |
| Shelf Address              | Shelf_addr           | Input     | Voltage level addressing of Rectifiers within multiple shelves. Ref: Vout ( - ).  |
| Back bias                  | 8V_INT               | Bi-direct | Diode OR'ed 8Vdc drain; used to back bias microprocessors and DSP of failed Rectifier from operating Rectifiers. Ref: Vout ( - ).   |
| Mux Reset                  | Reset                | Input     | Resets the I <sup>2</sup> C lines to I <sup>2</sup> C line 0.   |
| Standby power              | 5VA                  | Output    | 5V at 0.75A provided for external use by either adjacent power supplies or the using system.  |
| Current Share              | Ishare               | Bi-direct | A single wire interface between each of the power unit forces them to share the load current. Ref: Vout ( - ).  |
| I <sup>2</sup> C Line 0    | SCL_0, SDA_0         | Input     | I <sup>2</sup> C line 0.  |
| I <sup>2</sup> C Line 1    | SCL_1, SDA_1         | Input     | I <sup>2</sup> C line 1.  |
| I <sup>2</sup> C Interrupt | Alert#_0, Alert#_1   | Output    | Goes active LO  |
| RS485 Line                 | RS_485+<br>RS_485-   | Bi-direct | RS485 line.   |


## CP2725AC48TEZ-FB Rectifier

Input: 100-120/220-240 Vac; Output: 2725W<sup>1</sup> @ 52Vdc; 5 Vdc @ 4W

### Front Panel LEDs

|                              | Analog Mode                  | I <sup>2</sup> C Mode                             | RS485 Mode                               |
|------------------------------|------------------------------|---|--|
| <input type="checkbox"/> ~   | ←                            | ON: Input ok<br>Blinking: Input out of limits     | →  |
| <input type="checkbox"/> ... | ←                            | ON: Output ok<br>Blinking: Overload               | →  |
| <input type="checkbox"/> ✖   | ON: Over-temperature Warning | ON: Over-temperature Warning<br>Blinking: Service | ON: Over-temperature Warning             |
| <input type="checkbox"/> !   | ←                            | ON: Fault   | ON: Fault<br>Blinking: Not communicating |

### Dimensions

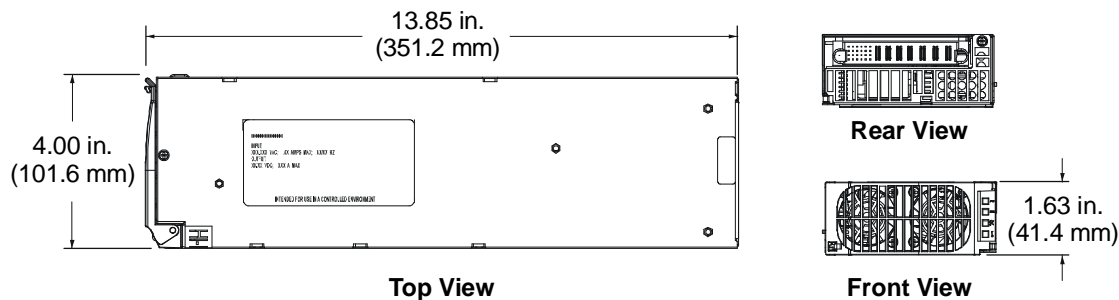

Faceplate color shall be dark grey with a green hinge.

### Physical

|                 |   |
|-----------------|---|
| Packaged weight | 5.4/2.45 lbs/kgs  |
| Unpacked weight | 4.8/2.18 lbs/kgs  |
| Heat release    | 100 Watts or 341 BTUs @ 80% load, 153 Watts or 522 BTUs @ 100% load |

### Ordering Information

| Item             | Description                           | Comcode   |
|------------------|---------------------------------------|-----------|
| CP2725AC48TEZ-FB | 48Vdc @ 52.4A, 5Vdc @ 0.75A, RoHS 6/6 | 150030225 |

### Contact Us

For more information, call us at

USA/Canada:

**+1 888 546 3243**, or +1 972 244 9288

Asia-Pacific:

**+86.021.54279977\*808**

Europe, Middle-East and Africa:

**+49.89.74423-206**

India:

**+91.80.28411633**

[www.ge.com/powerelectronics](http://www.ge.com/powerelectronics)



# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype      ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email       mkt@ameya360.com