

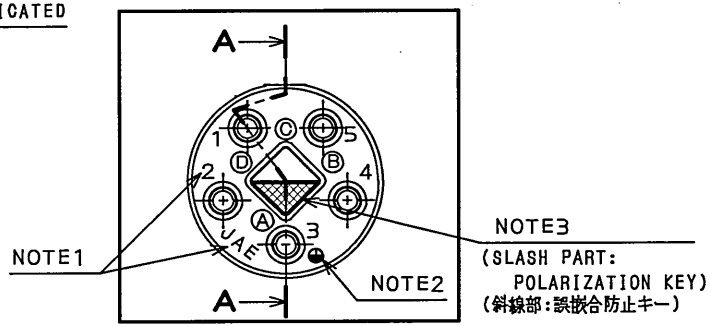


026201RS
(ON 0NIMVHD)台要図

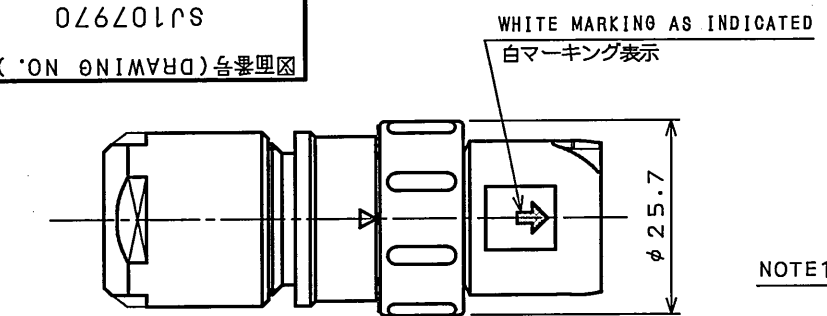

INSERT ARRANGEMENT (SCALE 2:1)
インサート配列図(尺度 2:1)

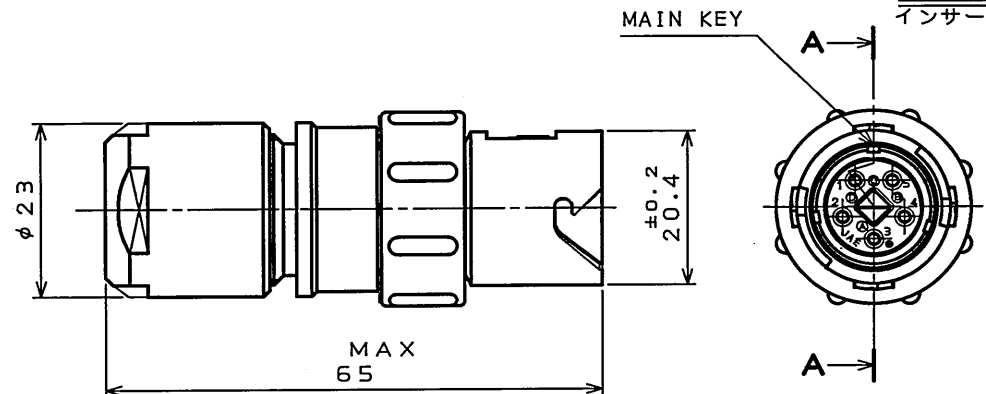

特別管理品目
SPECIAL CONTROL ITEM
TUV

版数 REV.	年月日 DATE	DCN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
2	31.Jul.2008	065833	ADDED ITEM		T.SUZUKI	T.OKAMURA	E.MATSUMOTO

- NOTE1. CONTACT POSITION NUMBER & COMPANY LOGO "JAE" ARE MARKED AS INDICATED.
2. EARTH MARK (⊕) IS MARKED AS INDICATED.
3. POLARIZATION KEY IS BUILT INTO THE POSITION ④ FOR ANOTHER POSITION (②-③), THE LOCK PART IS PICKED UP AND DETACHED WITH TWEEZERS. POLARIZATION KEY IS BUILT AGAIN.
4. THE PART NUMBER SHALL BUSHING AND THE APPLICABLE CABLE SIZE. SEE TABLE-1 FOR RESPECTIVE PART NUMBERS, THEIR APPLICABLE CABLES, THEIR BUSHING COLORS, AND IDENTIFICATION.

- 注1. 図示の位置に端子番号及び社名を表示する。
2. 図示の位置にアースマーク(⊕)を表示する。
3. 誤嵌合防止キーは④のボ シ ョ ンに組み込まれている。別のボ シ ョ ン(②-③)にする場合は、誤嵌合防止キーのロック部をピンセットで摘まんで取り外し、再装着すること。
4. 本製品は品名によりブッシング部品 ② 及び、適用ケーブルが異なる。品名、適用ケーブル、色相及び、識別表示は表-1による。

TABLE-1【APPLICABLE WIRE DIM.】

PART NUMBER 品名	APPLICABLE WIRE DIM. 適用ケーブル径	BUSHING COLOR ブッシングの色相	IDENTIFICATION 識別表示
JN2HW05FH1	φ8~10	BLACK	φ10
JN2HW05FH2	φ10~12	BLACK	NONE


MARKED LOCATION
表示位置

SPECIFICATION


NUMBER OF CONTACT	: 5X#16
RATED VOLTAGE	: 400VAC POLLUTION DEGREE/2, OVER VOLTAGE CATEGORY/II
RATED CURRENT	: 13A MAX. per CONTACT
DIELECTRIC WITHSTANDING VOLTAGE	: 2000VAC
INSULATION RESISTANCE	: 1000MΩMIN. (AT 500VDC)
APPLICABLE CABLE	: AWG#14 MAX(SEE NOTE4)
SUBVERSIBLE PROPERTY	: IP67 (MATED)

仕様

コンタクト : #16コンタクト 5本
定格電圧 : 400VAC(汚染度:2/過電圧耐性:II)
定格電流 : 13A以下/1芯
耐電圧 : 2000VAC
絶縁抵抗 : 1000MΩ以上(500VDCにて)
適用ケーブル : AWG#14以下(注4)
防水性能 : IP67(嵌合時)

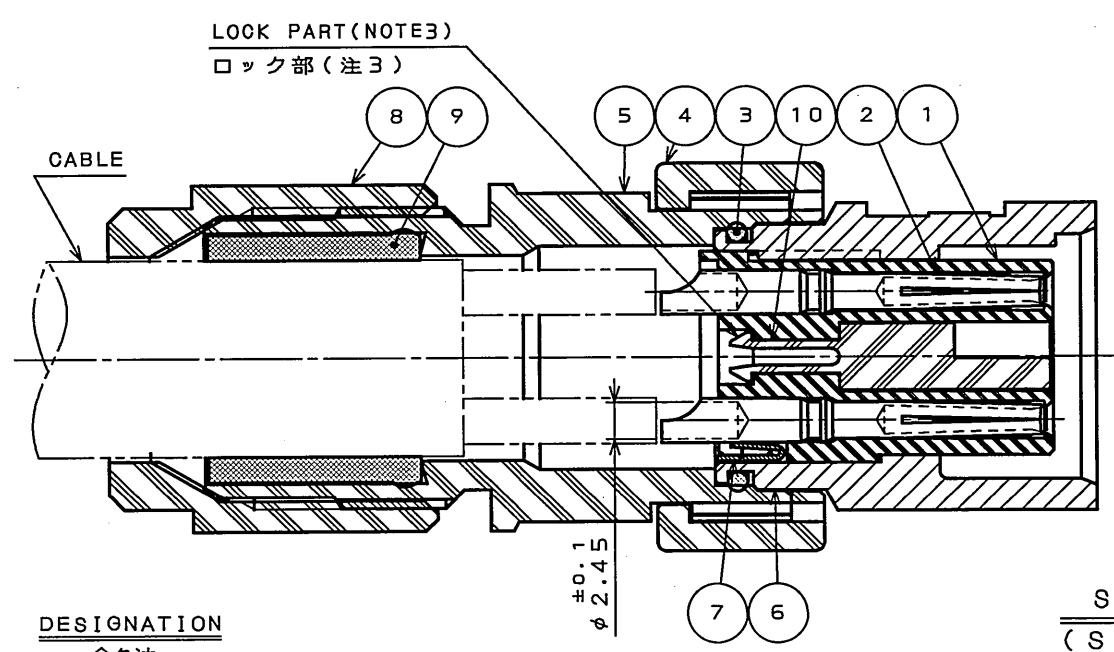

SECT. A-A
(SCALE 2:1)

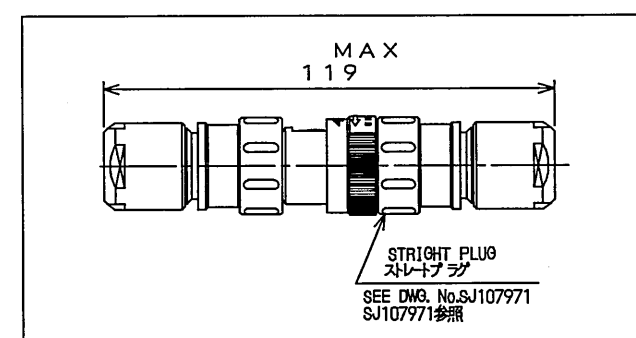


MATED CONDITION (SCALE 1:2)
嵌合状態図(尺度 1:2)

10	POLARIZATION KEY	1	SYNTHETIC RESIN		COLOR: WHITE, NOTE3
9	BUSHING	1	SYNTHETIC RUBBER		NOTE4
8	GLAND NUT	1	SYNTHETIC RESIN		COLOR: BLACK
7	EARTH LUG	1	COPPER ALLOY	SILVER PLATING	
6	SHELL	1	ZINC ALLOY	ZINC PLATING	COLOR: BLACK SYSTEM INTERFERENCE COLOR
5	STRAIGHT ENDBELL	1	SYNTHETIC RESIN		COLOR: BLACK
4	ASSEMBLY NUT	1	SYNTHETIC RESIN		COLOR: BLACK
3	O-RING	1	SYNTHETIC RUBBER		
2	SOCKET CONTACT	5	COPPER ALLOY	SILVER PLATING	
1	INSULATOR	1	SYNTHETIC RESIN		COLOR: BLACK

符 号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS
仕様書 (SPECIFICATION)					
JACS-5119-4 (Product specifications) JAHL-5119 (A product instruction manual)					
公差 (GENERAL TOLERANCE)					
寸法 (DIMENSION)					
角度 (ANGLES)					
第1版 (ORIGINAL DATE)					
28.Jan.2008					
製図 (SCALE)					
1:1					
シリーズ (SERIES)					
JN2					
名称 (TITLE)					
JN2HW05FH※ (CABLE CONNECTING RECEPTACLE) (中継用レセプタクル)					
質量 (MASS)					
図面番号 (DRAWING NO.)					
SJ107970					

DOF-0-212F(05.08)



Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com