

SML-T1 series

Actual size
 1608(0603)
 1.6 × 0.8mm(t=0.55mm)

Features

- Compact LED with reflector
- Die is located at the center of the package, achieving equivalent distribution of light emission.
- New emitting color, including the pastel colors available upon request.




Specifications



Part No.	Chip Structure	Emitting Color	Absolute Maximum Ratings (Ta=25°C)						Electrical and Optical Characteristics (Ta=25°C)											
			Power Dissipation Pd (mW)	Forward Current IF (mA)	Peak Forward Current I _{FP} (mA)	Reverse Voltage VR (V)	Operating Temperature Topr (°C)	Storage Temperature Tstg (°C)	Forward Voltage VF Typ. (V)	Forward Current IF (mA)	Reverse Current IR Max. (μA)	Reverse Voltage VR (V)	Dominant Wavelength λD (nm)			Luminous Intensity Iv (mcd)				
■ SML-T13VT	AlGaInP	Red	75	30	100*1	-40 to +85	-40 to +100	2.0	20	5	10	625	630	635	20	100	160	20		
■ SML-T13UT												615	620	625					40	75
■ SML-T13DT		Orange										602	605	608					63	120
■ SML-T13YT												Yellow	587	590					593	25
■ SML-T13WT		Yellowish Green											584	587					590	16
■ SML-T13MT												Green	569	572					575	6.3
■ SML-T13FT		Green											557	560					563	14
■ SML-T13PT												Green	464	470					476	5
■ SMLT12BC7T	InGaN	Blue Lagoon	70	20	-40 to +100	3.0	10	5	10	5	10		140	220	10					
□ SMLT12WBC7W												White				(x, y) (0.30, 0.30)	71	120		
□ SMLT12WBC8CW(A)	White	Ice Blue	70	20	-40 to +100	3.0	10	5	10	5	10		140	220	10					
☆ SMLT12ABC7W												Blue Lagoon				(x, y) (0.17, 0.35)	56	110		
☆ SMLT12CBC7W	Ice Blue	Blue Lagoon	70	20	-40 to +100	3.0	10	5	10	5	10		140	220	10					
☆ SMLT12GBC7W												Blue Lagoon				(x, y) (0.188, 0.280)	110	160		
☆ SMLT12SBC7W	Sapphire Blue	Blue Lagoon	70	20	-40 to +100	3.0	10	5	10	5	10		140	220	10					
☆ SMLT12HBC8W												Pink				(x, y) (0.238, 0.405)	56	110		

* 1: Duty 1/10, 1KHz * 2: Reference

Dimensions

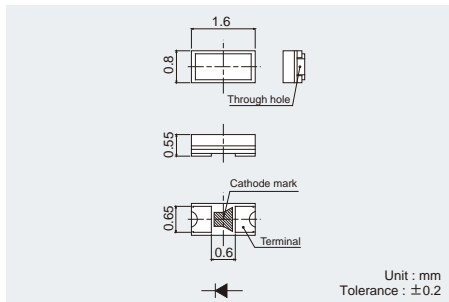


Recommended Solder Pattern Viewing Angle

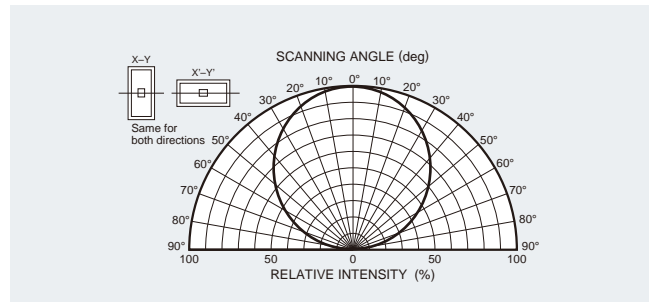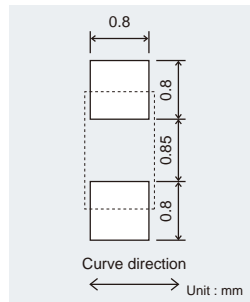


Electrical Characteristics Curves


Forward Current-Forward Voltage

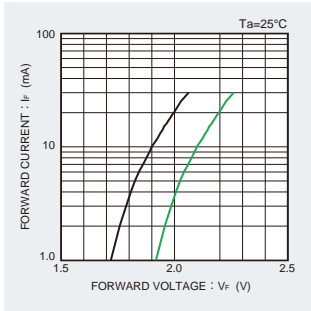

- SML-T13VT
- SML-T13UT
- SML-T13DT
- SML-T13WT
- SML-T13YT
- SML-T13MT
- SML-T13FT
- SML-T13PT

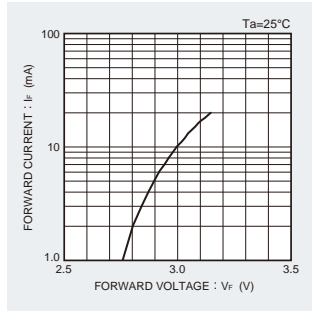


- SMLT12BC7T
- SMLT12WBC7W
- SMLT12WBC8W

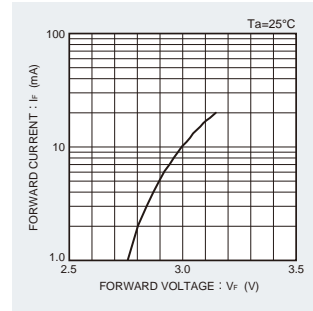


- SMLT12ABC7W
- SMLT12CBC7W
- SMLT12GBC7W
- SMLT12SBC7W
- SMLT12HBC8W


Luminous Intensity-Atmosphere Temperature

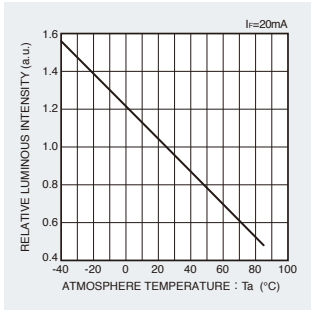

- SML-T13VT
- SML-T13UT
- SML-T13DT
- SML-T13WT
- SML-T13YT
- SML-T13MT
- SML-T13FT
- SML-T13PT

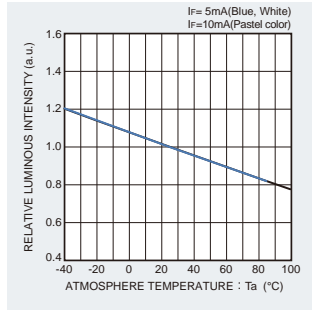


- SMLT12BC7T
- SMLT12WBC7W
- SMLT12WBC8W

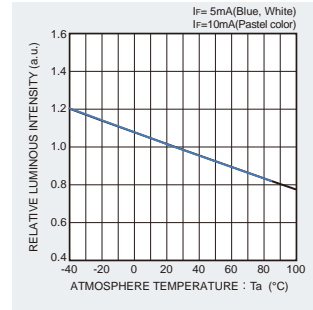


- SMLT12ABC7W
- SMLT12CBC7W
- SMLT12GBC7W
- SMLT12SBC7W
- SMLT12HBC8W


Luminous Intensity-Forward Current

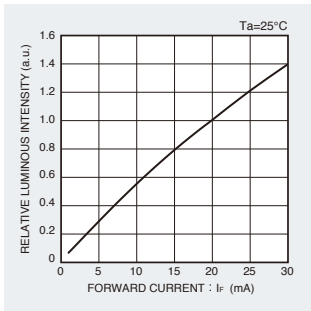

- SML-T13VT
- SML-T13UT
- SML-T13DT
- SML-T13WT
- SML-T13YT
- SML-T13MT
- SML-T13FT
- SML-T13PT

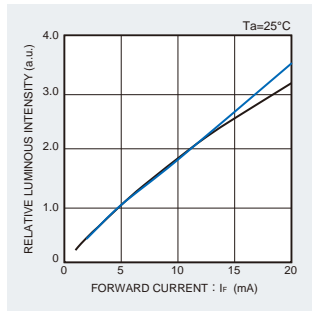


- SMLT12BC7T
- SMLT12WBC7W
- SMLT12WBC8W

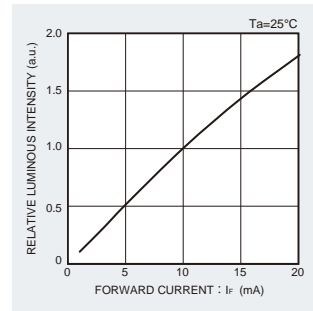


- SMLT12ABC7W
- SMLT12CBC7W
- SMLT12GBC7W
- SMLT12SBC7W
- SMLT12HBC8W


Derating

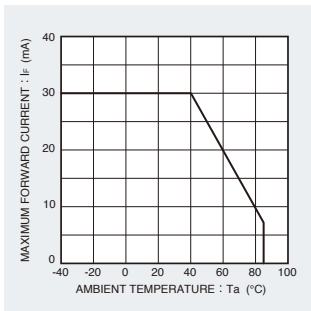

- SML-T13VT
- SML-T13UT
- SML-T13DT
- SML-T13WT
- SML-T13YT
- SML-T13MT
- SML-T13FT
- SML-T13PT

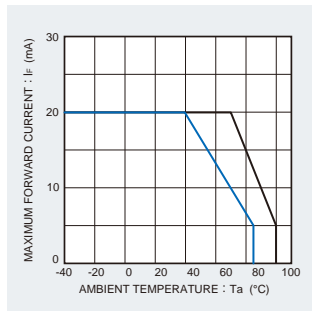

- SMLT12BC7T
- SMLT12WBC7W
- SMLT12WBC8W

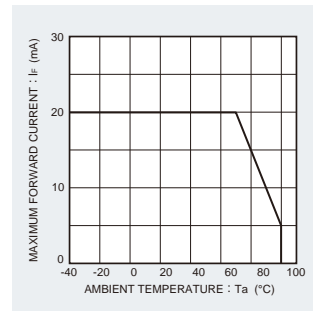

- SMLT12ABC7W
- SMLT12CBC7W
- SMLT12GBC7W
- SMLT12SBC7W
- SMLT12HBC8W

SML-T1 series

Rank Reference of Brightness

Red (V, U)

Package structure	Package size	Height (mm)	Luminous Intensity (mcd) I _r (mA)	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X	Y	Z	
				1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600	1600 to 2500	2500 to 4000	
Reflector	1608	0.55	20																			

Orange (D)

Package structure	Package size	Height (mm)	Luminous Intensity (mcd) I _r (mA)	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X	Y	
				1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600	1600 to 2500	
Reflector	1608	0.55	20																		

Yellow (Y, W)

Package structure	Package size	Height (mm)	Luminous Intensity (mcd) I _r (mA)	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X	Y	
				1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600	1600 to 2500	
Reflector	1608	0.55	20																		

Green (M, P, F)

Package structure	Package size	Height (mm)	Luminous Intensity (mcd) I _r (mA)	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X	Y
				0.63 to 1.0	1.0 to 1.6	1.6 to 2.5	2.5 to 4.0	4.0 to 6.3	6.3 to 10	10 to 16	16 to 25	25 to 40	40 to 63	63 to 100	100 to 160	160 to 250	250 to 400	400 to 630	630 to 1000	1000 to 1600	1600 to 2500
Reflector	1608	0.55	20																		

Blue (B)

Package structure	Package size	Height (mm)	Luminous Intensity (mcd) I _r (mA)	G	H	J	K	L	M	N	P	Q	R	S	T	U	V	W	X	
				0.9 to 1.4	1.4 to 2.2	2.2 to 3.6	3.6 to 5.6	5.6 to 9.0	9 to 14	14 to 22	22 to 36	36 to 56	56 to 90	90 to 140	140 to 220	220 to 360	360 to 560	560 to 900	900 to 1400	1400 to 2200
Reflector	1608	0.55	5																	

White (WB)

Package structure	Package size	Height (mm)	Luminous Intensity (mcd) I _r (mA)	M	N	P	Q	R	S	T	U	V	W	X	Y	Z
				9 to 14	14 to 22	22 to 36	36 to 56	56 to 90	90 to 140	140 to 220	220 to 360	360 to 560	560 to 900	900 to 1400	1400 to 2200	2200 to 3600
Reflector	1608	0.55	5													

Pastel Color

Package structure	Package size	Height (mm)	Luminous Intensity (mcd) I _r (mA)	M	N	P	Q	R	S	T	U	V	W	X	Y	Z
				9 to 14	14 to 22	22 to 36	36 to 56	56 to 90	90 to 140	140 to 220	220 to 360	360 to 560	560 to 900	900 to 1400	1400 to 2200	2200 to 3600
Reflector	1608	0.55	10													

Part No. Construction

* "-" will be taken out for emitting color
WB/E series and pastel color.

(Special classification code)

Rank sign (Chromaticity Rank)*
(for white LED and pastel color)



2	High Brightness Type
3	

V	Red:630nm
U	Red:620nm
D	Orange:605nm
Y	Yellow:590nm
W	Yellow:587nm
M	Yellowish-Green:572nm
P	Green:560nm
B	Blue:470nm
WB	White
AB	Blue lagoon
CB	Ice blue
GB	Blue green
SB	Sapphire blue
HB	Pink

T	Transparent Colorless
W	MilkyWhite

T86	Cathode at sprocket hole side
T87	Reverse of T86
1	For white LED and pastel color, cathode at sprocket hole side

- * Concerning the rank
- Please refer to the rank chart above for luminous intensity classification.
- Please refer to the Specification sheet for color classification.
- Part name is individual for each rank.
- When shipped as sample, the part name will be a representative part name.
- General products are free of ranks. Please contact sales if rank appointment is needed.

Packing Specification

ROHM LED products are being shipped with desiccant (silica gel) concluded in moisture-proof bags.
Pasting the moisture sensitive label on the outer surface of the moisture-proof bags or enclosing the humidity indication card inside the bag is available upon request.
Please contact the nearest sales office or distributor if necessary.

Notes

- 1) The information contained herein is subject to change without notice.
- 2) Before you use our Products, please contact our sales representative and verify the latest specifications :
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.
Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Products beyond the rating specified by ROHM.
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communication, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.
- 7) The Products specified in this document are not designed to be radiation tolerant.
- 8) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- 9) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 10) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 11) ROHM has used reasonable care to ensure the accuracy of the information contained in this document. However, ROHM does not warrant that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 12) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting from non-compliance with any applicable laws or regulations.
- 13) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 14) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com