
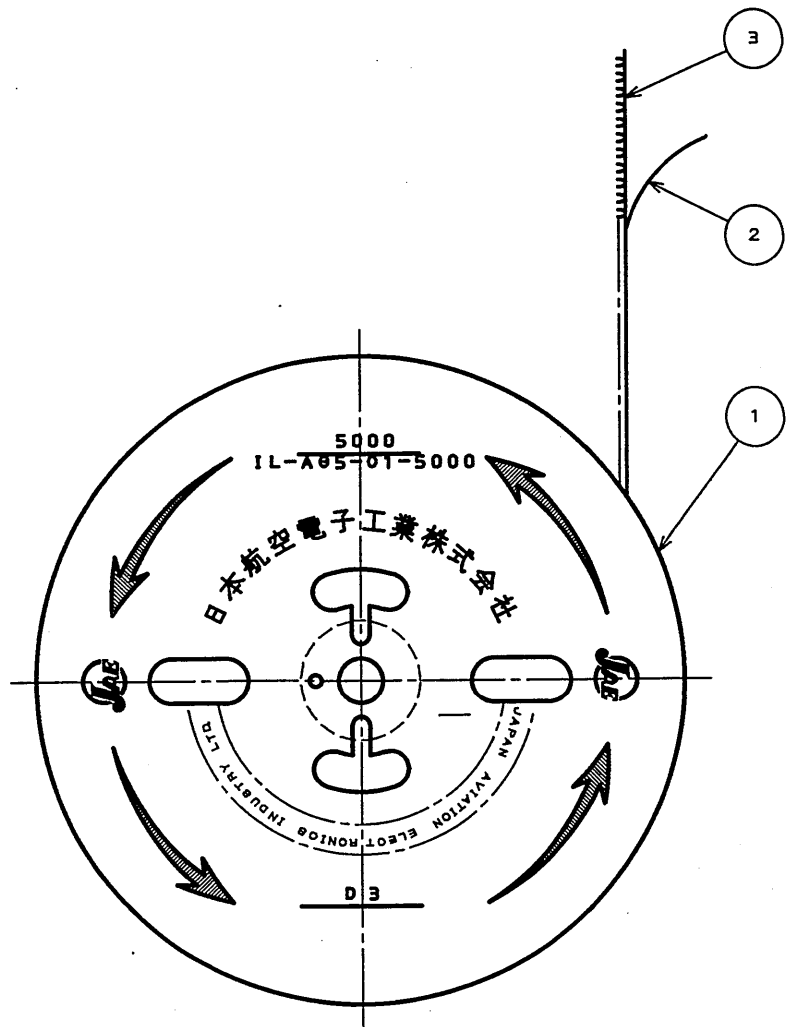
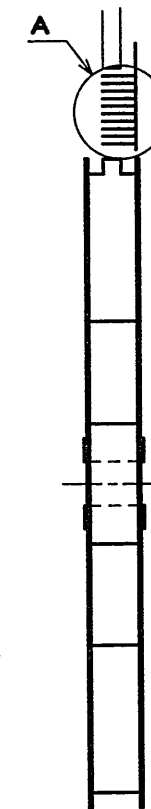


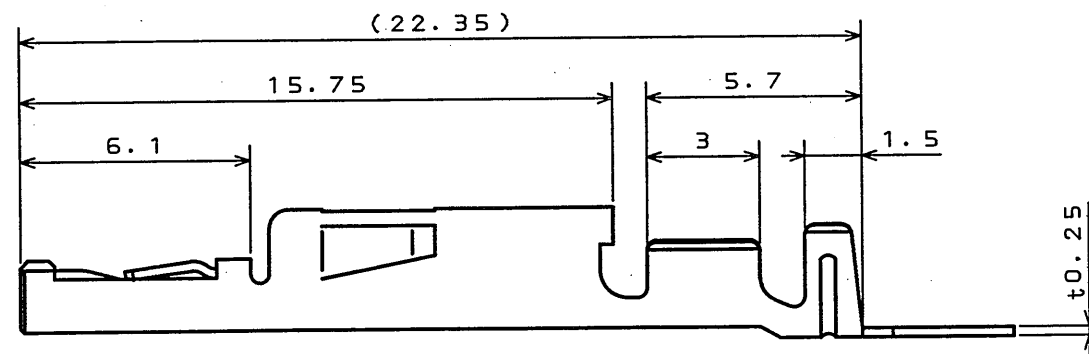


8767207S
(ON DRAWING NO.)

版数 REV.	年月日 DATE	DGN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
2	20.Nov.1989	25942	REDRAWN				
3	8.Sep.2003	053208	CHANGED TO BILINGUAL etc.	M.TANAKA	S.HARA	T. Ichimori	K. Takeda

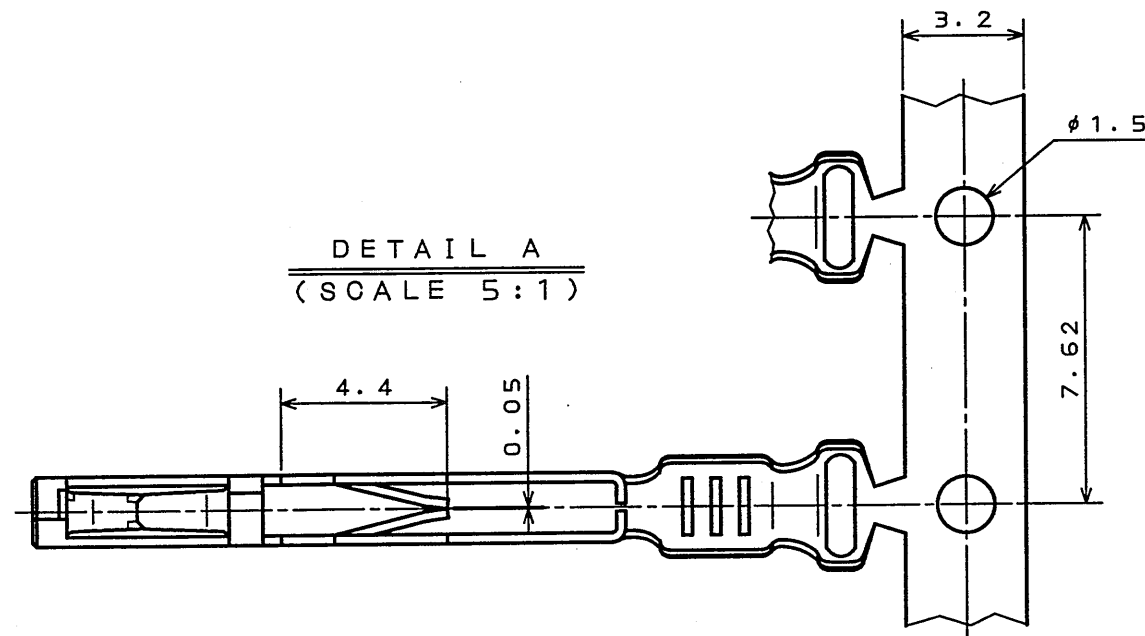

NOTE1. APPLICABLE MATING PIN: $\square 0.64 \pm 0.05$

2. APPLICABLE WIRE: AWG#18~#22(0.85~0.3mm²)
INSULATION OUTER DIA.: $\phi 1.4 \sim \phi 2.4$

3. NO PLATING ON THE SHEARED EDGES OF CONTACT.

4. PART NUMBER & QUANTITY AS INDICATED. (COLOR:ORANGE)

△ 5. REFER TO "JABL-1309(-E)" FOR COMPLETE CRIMP AND WIRE SPECIFICATIONS.

注1. 挿入ピンは板厚 $\square 0.64 \pm 0.05$ とする。

△ 2. 使用電線は、AWG#22~#18(0.3~0.85mm²)相当、
被覆外径 $\phi 1.4 \sim \phi 2.4$ の撚線とする。

3. 剪断面にめっきは付かない。

△ 4. 図示の如く品名及び数量を表示する。(文字色相:オレンジ色)

△ 5. 圧着状態、適用電線については"JABL-1309(-E)"を参照のこと。

3	SOCKET CONTACT	5000	PHOSPHOR BRONZE	TIN PLATING	
2	PAPER TAPE	1	PAPER		
1	MAGAGINE	1	PAPER		
符号 NO.	名称 DESCRIPTION	数量 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
仕様書(SPECIFICATION)		第1版(ORIGINAL DATE)		JAE-CONNECTOR.COM	
JACS-1309 △		29.Feb.1988		JAE	
公差(GENERAL TOLERANCE)		製図 DR.		名称(TITLE)	
寸法(DIMENSION)		担当 CHK.		IL-A05-C1-5000	
角度(ANGLES)		査閲 APPD.		(MAGAGINE ASSEMBLY)	
. ± 0.3		承認 APPD.		重量(WEIGHT)	
.X ± 0.3		K.TAKEDA		図面番号(DRAWING NO.)	
.XX ± 0.2				SJ022948	
.XXX $\pm$				版数 (REV.)	
				3	

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com