


LPS150 Series

150 Watts

Total Power: 100 - 150 Watts
Input Voltage: 85-132 /170-264 Vac
220 - 300 Vdc
of Outputs: Single

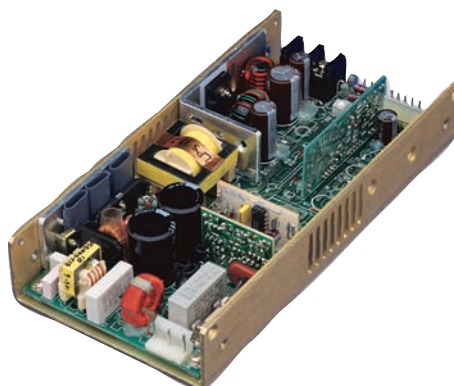

Special Features

- Auto ranging input
- Remote sense
- Remote inhibit
- Power fail
- Single wire current sharing
- Built-in EMI filter
- Low output ripple
- Adjustable output
- 135 khz switching frequency
- Overvoltage protection
- Overload protection
- Optional cover (-C suffix)

Safety

VDE	0805/EN60950 (IEC950) 11774-3336-1260 (LC#88585)
UL	UL1950 EI32002
CSA	CSA 22.2-234 Level 3 LR53982
NEMKO	EN 60950/EMKO-TUE P95102999 (74-sec) 203
BABT	EN60950/BS7002 607019
CB	Certificate and report 2062
CE	Mark (LVD)

Electrical Specifications

Input	
Input range	85 - 132 Vac or 170 - 264 Vac automatically selected; 220 - 300 Vdc
Frequency	47 - 63 Hz
Inrush current	38 A max, cold start @ 25 °C
Efficiency	75% typical at full load
EMI filter	FCC Class B conducted CISPR 22 Class B conducted EN55022 Class B conducted VDE 0878 PT3 Class B conducted
Safety ground leakage current	0.5 mA @ 50/60 Hz, 264 VAC input
Output	
Maximum power	110 W convection (75 W with cover) 150 W with 30 CFM forced air (130 W with cover)
Adjustment range	± 5% minimum on the main outputs
Hold-up time	20 ms @ 110 W load, 115/230 Vac nominal Iline
Overload protection	Short circuit protection. Case overload protected @ 110% to 145% above peak rating
Overvoltage protection	5 V output: 5.7 to 6.7 VDC. Other outputs 10% to 25% above nominal output
Logic Control	
Power failure	TTL Logic signal goes high 50 - 150 msec after 5 V output. It goes low at least 3 ms before loss of regulation
Remote inhibit	Requires an external TTL high signal to inhibit outputs
Remote sense	Compensates for 0.5 V lead drop minimum, will operate without remote sense connected. Reverse connection protected



Environmental Specifications

Operating temperature:	0° to 50 °C ambient; derate each output at 2.5% per degree from 50° to 70 °C
Storage temperature:	-40 °C to +85 °C
Temperature coefficient:	± 0.4% per °C
Electromagnetic susceptibility:	Designed to meet IEC 801, -2, -3, -4, -5, -6, Level 3
Humidity:	Operating; non-condensing 5% to 95%
Vibration:	Three orthogonal axes, sweep at 1 oct/min, 5 min. dwell at four major resonances 0.75G peak 5Hz to 500Hz, operational
MTBF demonstrated:	> 550,000 hours at full load and 25 °C ambient conditions

Ordering Information

Model Number	Output Voltage	Minimum Load	Maximum Load with Convection Cooling	Maximum Load with 30CFM forced Air	Peak Load ¹	Regulation ²	Ripple P/P (PARD) ³
LPS152	5 V	0 A	22 A	30 A	35 A	± 2%	50 mV
LPS153	12 - (15) V	0 A	9.1 A	12.5 A	14.5 A	± 2%	150 mV
LPS155	24 - (28) V	0 A	4.5 A	6.2 A	7.2 A	± 2%	280 mV, max.

1. Peak current lasting < 30 seconds with a maximum 10% duty cycle.
2. At 25 °C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 µF in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.

Pin Assignments			
Connector	LPS152	LPS153	LPS155
SK1	PIN 1 INHIBIT -ve	INHIBIT -ve	INHIBIT -ve
	PIN 2 INHIBIT +ve	INHIBIT +ve	INHIBIT +ve
	PIN 3 VCC	VCC	VCC
	PIN 4 No Connection	No Connection	No Connection
	PIN 5 COMMON	COMMON	COMMON
	PIN 6 -SENSE	-SENSE	-SENSE
	PIN 7 +SENSE	+SENSE	+SENSE
	PIN 8 C SHARE	C SHARE	C SHARE
SK2	PIN 5 COMMON	COMMON	COMMON
	PIN 6 PIN REMOVED	PIN REMOVED	PIN REMOVED
	PIN 7 POK	POK	POK
SK3	TB-1 COMMON	COMMON	COMMON
	TB-2 +5 V	+5 V	+5 V
SK4	PIN 1 GROUND	GROUND	GROUND
	PIN 3 LINE	LINE	LINE
	PIN 5 NEUTRAL	NEUTRAL	NEUTRAL

Mating Connectors

AC input (SK4): Molex 09-50-8051 (USA)
Molex 09-91-0500 (UK)
PINS: 08-58-0111


Power fail (SK2): Molex 09-50-8031 (USA)
Molex 09-91-0300 (UK)
PINS: 08-58-0111

Remote sense/ Remote inhibit (SK1): Molex 51110-0851 (USA)
PINS: 50394-8100

Astec Connector Kit #70-841-009, includes all of the above

1. Specifications subject to change without notice.
2. All dimensions in inches (mm), tolerance is ±0.02" (±0.5mm)
3. Specifications are for convection rating at factory settings unless otherwise stated
4. Remote inhibit requires an external 5V @ 10mA to activate.
5. Mounting (6-32) maximum insertion depth is 0.12".
6. Warranty: 2 year
7. Weight: 1.75 lbs/0.80 kg

Mechanical Drawing

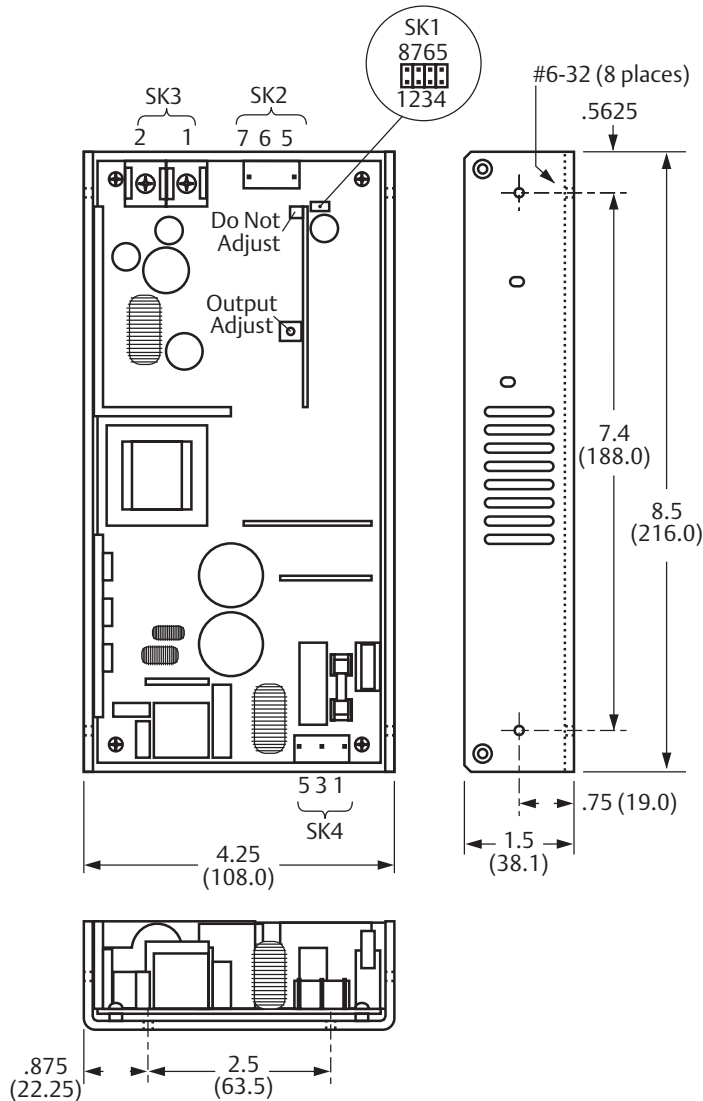

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.Emerson.com/EmbeddedPower
techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2010 Emerson Electric Co.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com