


CAPA111

AMD G-Series APU 3.5" Embedded SBC with AMD A50M, LVDS/VGA, Dual LANs and Audio

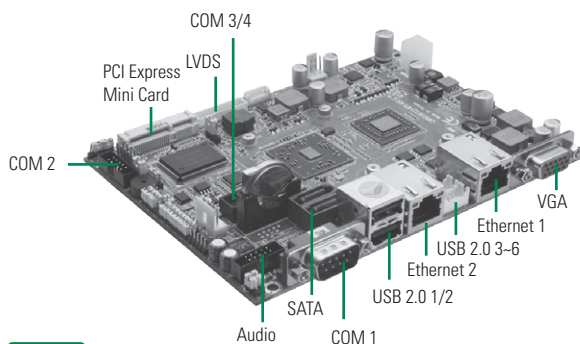

System


CPU	AMD G-Series APU T40R 1.0 GHz single core and T40E 1.0 GHz dual core onboard
System Memory	1 x 204-pin SO-DIMM supports DDR3-1066 max. up to 4 GB
Chipset	AMD A50M
BIOS	AMI UEFI BIOS
SSD	1 x CompactFlash™
Watchdog Timer	255 levels, 1~255 sec.
Expansion Interface	1 x PCI Express Mini Card V1.2
Battery	Lithium 3V/220mAh
Power Input	2 x 2-pin connector +12V DC-in only AT Auto Power ON function supported
Power Requirement	AMD G-Series APU T40E @ 1.0 GHz, 1 GB DDR3 Max. RMS: +12V @ 1.06A AMD G-Series APU T40R @ 1.0 GHz, 1 GB DDR3 Max. RMS: +12V @ 0.96A
Size	146 x 104mm
Board Thickness	1.6 mm
Operating Temperature	0°C ~ +60°C (32°F ~ 140°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O


MIO	1 x RS-232/422/485 (COM 1); with +5V/+12V powered 3 x RS-232 (COM 2/3/4); with +5V/+12V powered
SATA	2 x SATA-600
Hardware Monitoring	Detect CPU/system temperature, voltage and fan speed
Ethernet	2 ports 10/100/1000 Mbps support Wake-on-LAN, RPL/PXE Boot ROM with Realtek RTL8111E
Audio	HD Codec audio as MIC-in/Line-in/Line-out/Speaker-out with Realtek ALC662
USB	6 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control (optional)
Digital I/O	8 channels IN/OUT programmable

Features

- AMD G-Series APU T40R (1.0 GHz)/ T40E (1.0 GHz)
- 1 DDR3 SO-DIMM supports up to 4 GB memory capacity
- 2 SATA-600 supported
- 6 USB 2.0 ports
- 4 COM ports
- DirectX 11 support



▲ Top view



▲ Rear view

Display

Chipset	AMD G-Series APU integrated graphic engine T40E/T40R - Radeon™ HD6250
Memory Size	Max. up to 2 GB in 4 GB DDR3 module
Display Interface	1 x VGA 1 x LVDS; 18/24-bit single/dual channel

Packing List

Standard

Quick installation guide, user's manual/utility CD, cable

Cable

Part Number	Description	Qty
59382620000E	1 x COM w/ bracket P=2.0 mm, L=300 mm	1
59384500100E	Audio cable w/ bracket P=2.0 mm, L=450 mm	1
59382631000E	2 x USB 2.0 wafer cable w/ bracket 180 mm	1

Optional

59380000300E	2 x COM w/ bracket P=1.27 x 2.54 L=300 mm
--------------	---

Ordering Information

Standard

CAPA111VGA-T40R (P/N: E38E111101)	3.5" Embedded SBC with AMD G-Series APU T40R 1.0 GHz, A50M chipset, VGA/LVDS, 2 GbE LAN, 2 SATA-600, 4 COM, 6 USB and audio
CAPA111VGA-T40E (P/N: E38E111100)	3.5" Embedded SBC with AMD G-Series APU T40E 1.0 GHz and A50M chipset, VGA/LVDS, 2 GbE LAN, 2 SATA-600, 4 COM, 6 USB and audio



AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com