

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS : 1.2 mm

TECHNICAL CHARACTERISTICS



MATERIAL
INSULATOR: PA 6T
FLAMMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: SELECTIVE GOLD
SHIELDING: BRASS NI PLATED
QUALITY CLASS: 1500 MATING CYCLES


ENVIRONMENTAL
OPERATING TEMPERATURE: -40°C UP TO +85°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 1.5 A
WORKING VOLTAGE: 30 VAC
INSULATION RESISTANCE: >100 MΩ
WITHSTANDING VOLTAGE: 500 VAC/MIN
CONTACT RESISTANCE: 30 mΩ MAX

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING

PACKAGING
TAPE & REEL WITH MYLAR

RoHS Compliant				<div>PROJECTION:</div> <div></div>	<div>GENERAL TOLERANCE</div> <div>.X = \pm 0.2</div> <div>.XX = \pm 0.15</div>	<div></div>		
G								
F								
E								
D								
C	09-AVR-15	PCB THICKNESS	QP	APPROVAL: NPr	UNIT: MM	DESCRIPTION: HORIZONTAL USB2.0 A TYPE THT SLIM TYPE		SIZE A4
B	27-OCT-14	REVIEW	QL		SCALE:			
A	23-JUL-14	PDF	AS		SHEET: 1/3	WERI PART NO: 614 104 150 121		
REV	DATE	FILE	BY		DRAW: AS			

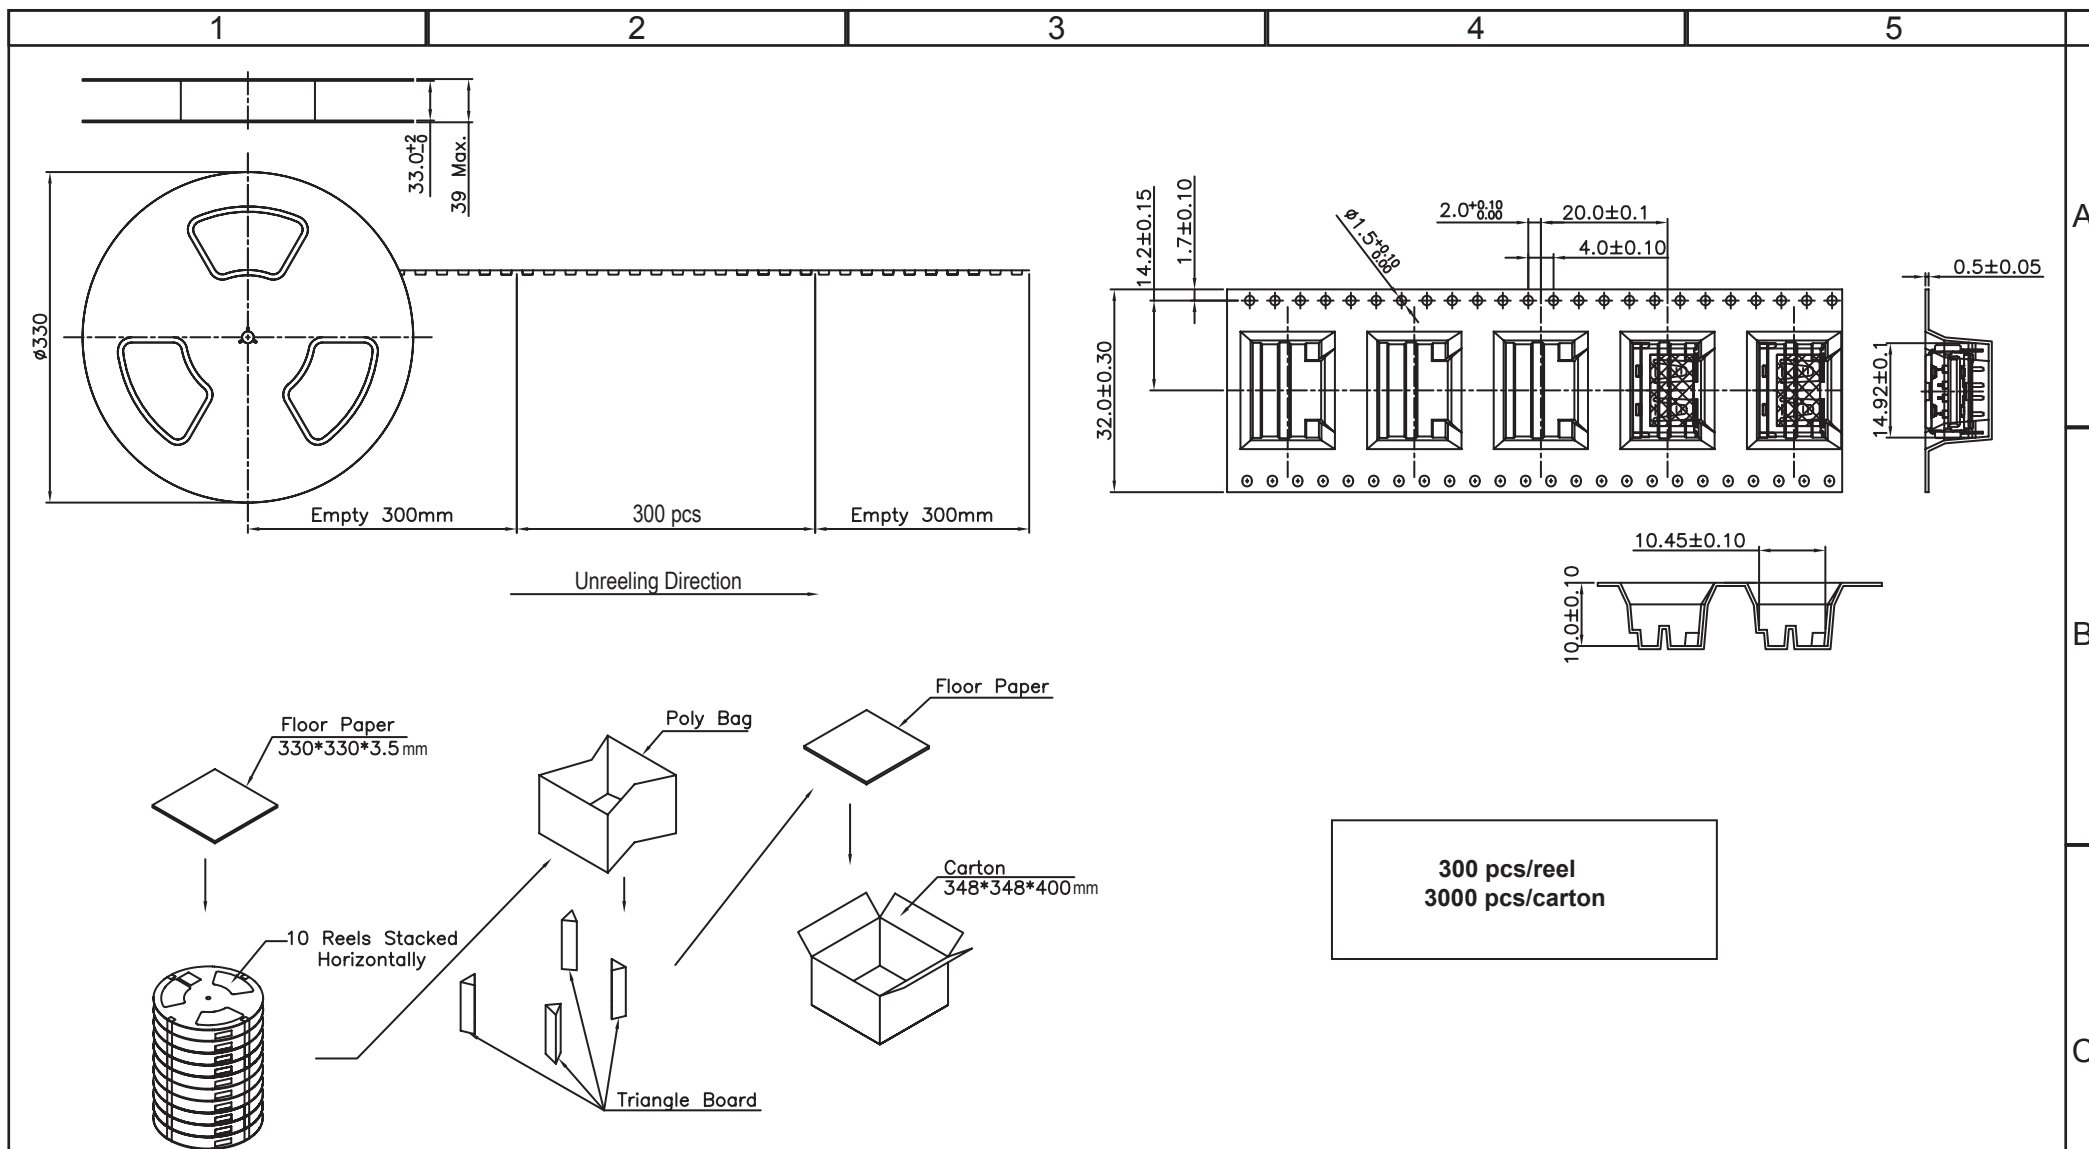

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = ± 0.2 .XX = ± 0.15		DESCRIPTION: HORIZONTAL USB2.0 A TYPE THT SLIM TYPE WERI PART NO: 614 104 150 121	SIZE A4
G								
F								
E								
D				APPROVAL: NPr	UNIT: MM			
C					SCALE:			
B					SHEET: 2/3			
A	23-JUL-14	PDF	AS		DRAW: AS			
REV	DATE	FILE	BY					

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com