

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

**ASSEMBLY-
PUSHBUTTON SWITCH**

CATALOG LISTING

2 PB 15**2 PB 15**

PAGE 1 OF 1

MDRAWING
NUMBERISSUE
1314

REPLACES

RELEASE NO.

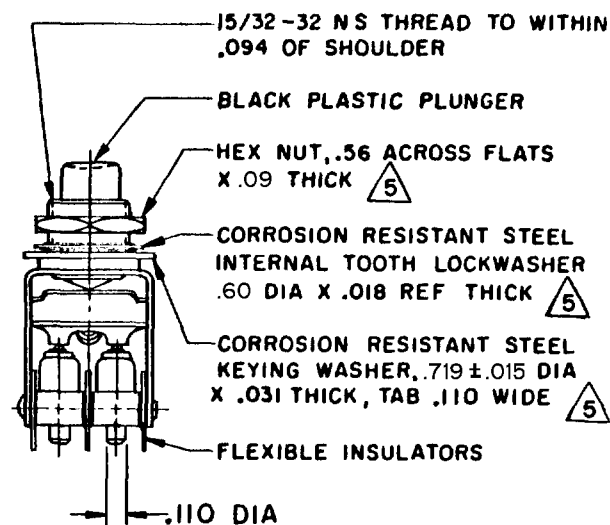
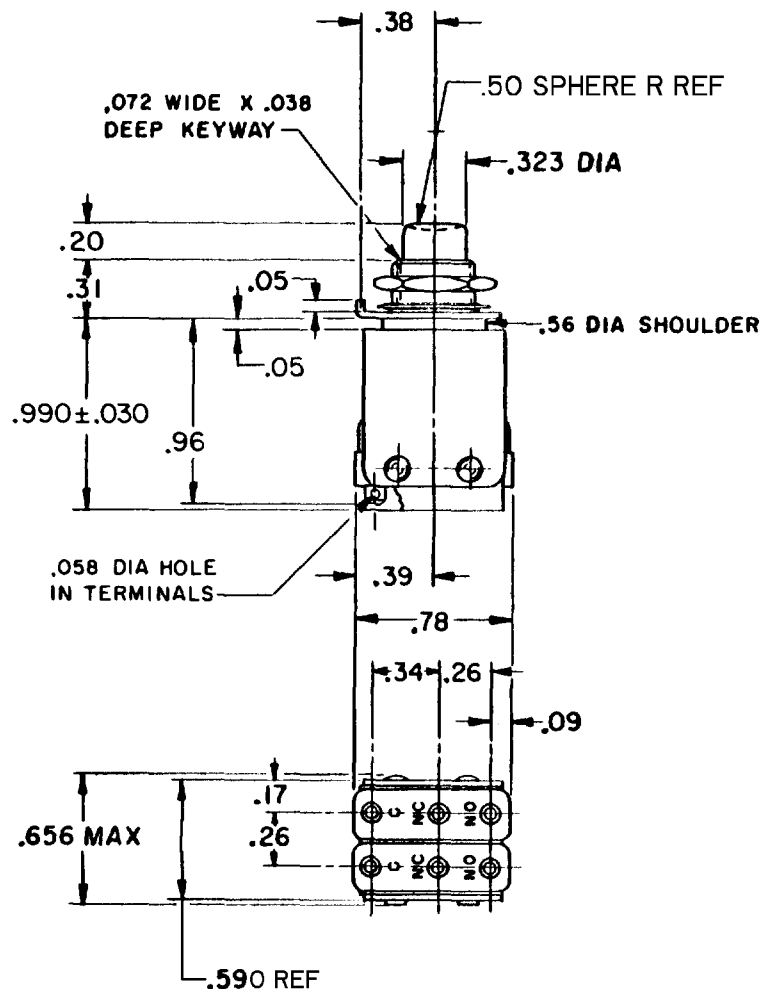
CHECK

REVISIONS
A CO19800
H B W
17 FEB 65
B CO21022
M B F
22 FEB 66
C CO30742
R E R
2 OCT 72
D CO31782
D B W
16 MAR 73
E CO-
93593
P P F
23 OCT 98
F CO-
94273
G J W
15 APR 99

CHECK

J A F 23 OCT 98
J A F 19 FEB 65
L S D

CHECK

H B W 17 FEB 65
DRAWN
FO-50376**NOTES**

- 1- UNIT INCLUDES "ISM" TYPE BASIC SWITCH (2)
- 2- TERMINALS ARE PLATED FOR SOLDERING
- 3- SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 4- BASIC SWITCHES HAVE 24 K SOLID GOLD CONTACTS
- 5 MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ——— 30 OZ APPROX
TOTAL TRAVEL ——— .110 APPROX
PRETRAVEL ——— .040 APPROX
DIFFERENTIAL TRAVEL ——— .050 MAX

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T (2)

30 VOLTS DC RATING

INDUCTIVE ——— SEA LEVEL ——— 1/2 AMP
50,000 FT ——— 1/2 AMP
RESISTIVE ——— SEA LEVEL ——— 1 AMP
50,000 FT ——— 1 AMP
MAXIMUM INRUSH ——— 2 AMP

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com