

### MET-60-T

#### Description:

Triad's high reliability audio transformers provide the durability and precision required in today's demanding designs. These transformers are available for a wide variety of applications.

#### Electrical Specifications (@20C)

Power level (mW)	Matching Impedance		Max. Ma DC Unbalance in Primary	DC Resistance ( $\Omega$ )		Overall Turns Ratio
	Primary	Secondary		Primary	Secondary	
50	135 $\Omega$	135 $\Omega$ CT	10.0	10.5	10.8	1.0:1.0




**Frequency Response:**  $\pm 2.0$  DB, at 300 Hz to 100K Hz

**Longitudinal Balance:** 60dB Min @ 1 KHz

**Pri-Sec Hipot test (Pri-Sec):** 1500 VRMS for 1 sec.

#### Construction:

Plug-in terminals are precision spaced to provide fixed mounting centers. Epoxy molded case includes a .020" recess for ease of solder inspection. Leads are Tin plated 0.020" in diameter.

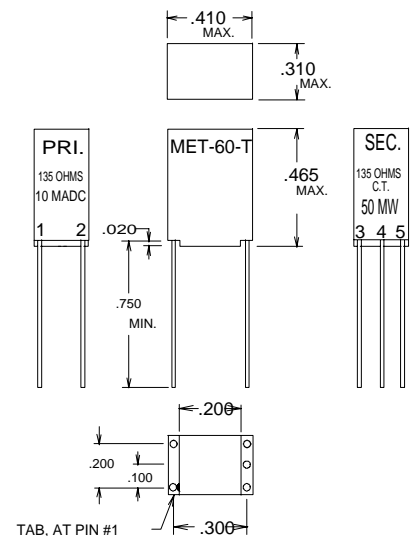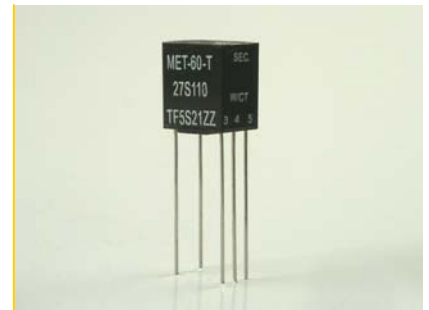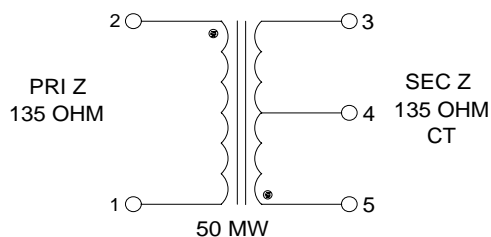

**RoHS Compliance:** As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

\*Upon printing, this document is considered "uncontrolled". Specifications are subjected to change without notice. Please contact Triad Magnetics' website for the most current version.

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype       ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email       mkt@ameya360.com