

NHD-5.7F-LED Driver

LED Backlight Driver

RoHS Compliant

Newhaven Display International, Inc.

2511 Technology Drive, Suite 101

Elgin IL, 60124

Ph: 847-844-8795 Fax: 847-844-8796

www.newhavendisplay.com

nhtech@newhavendisplay.com

nhsales@newhavendisplay.com

Document Revision History

Revision	Date	Description	Changed by
0	07/28/2010	Initial Release	MC

Functions and Features

- HIMAX HA7106 LED Driver
- 5V power supply input for 23.5V output, for **NHD-5.7-640480WF** series displays

ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Operating Temperature Range	-	Absolute Max	-20	25	70	°C
Storage Temperature Range	-	Absolute Max	-30	25	85	°C
Input Voltage	VDD	-	4.5	5.0	5.5	V
Supply Current	IDD	VDD=5V	289	305	311	mA
Output Current	Iout	VDD=5V	-	58.6	-	mA
Output Voltage	Vout	VDD=5V	-	23.5	-	V

J1 Pin Description (user input)

Pin No.	Symbol	External Connection	Function Description
1	GND	Power Supply	Ground for LED driver circuit
2	VDD	Power Supply	Power Supply for LED driver circuit

Connector: **2.54mm pitch through-holes**


J2 Pin Description (output)

Pin No.	Symbol	External Connection	Function Description
1	LED-	K	Ground for LED backlight
2	LED+	A	Power for LED backlight

Connector: **SM 02B-BHSS-1**

Connector on display backlight: **BHSR-02VS-1**

Mechanical Drawing

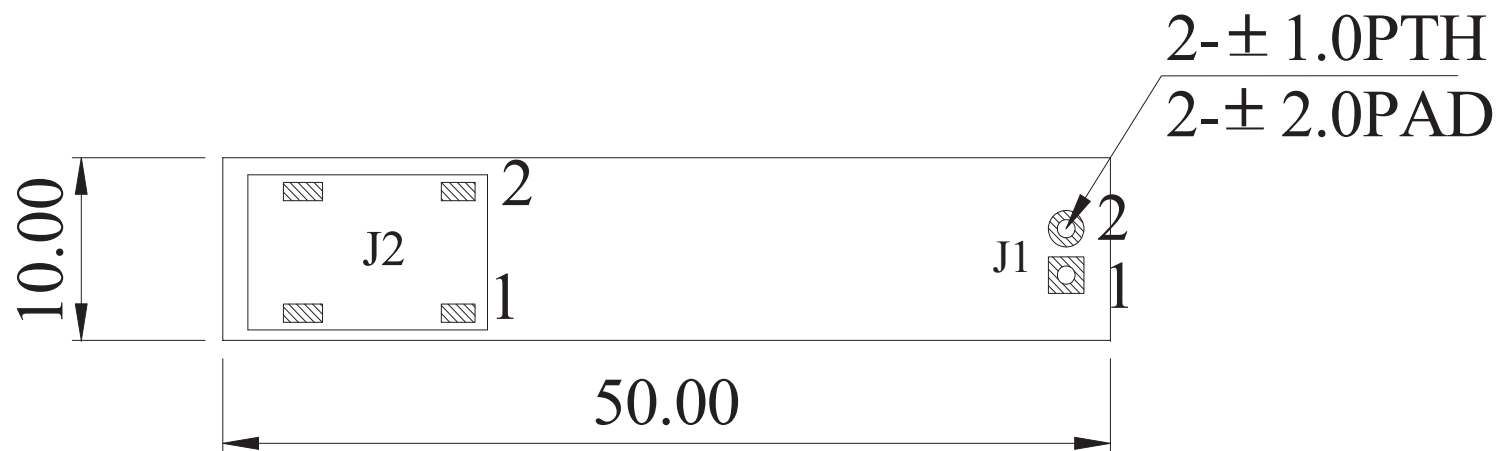

J2

PIN NO.	SYMBOL
1	B/L -
2	B/L +

J1

PIN NO.	SYMBOL
1	V _{SS}
2	+5V

Newhaven Display
NHD-5.7-F LED Driver

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com