

PIN Power Inductor RCR-110D



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 10.5 × 10.5 × 10.5mm Max.
- Product weight: 2.7 g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C~+85°C
(including coil's self temperature rise)
- Storage temperature range: -40°C~+85°C


Packaging

- Box packaging.


Applications

- Ideally used in Printers, LCD TV, DVD, Copy Machine, Mainboard of the compounding machines etc. as DC-DC Converter inductors.


Dimension - [mm]

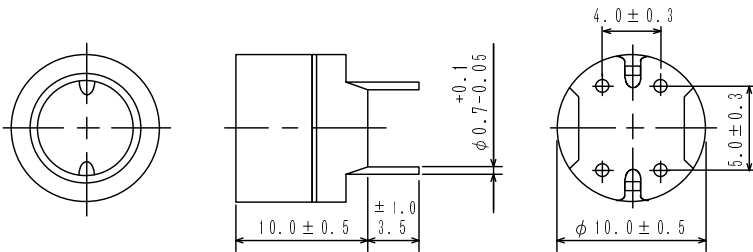

Schematics - [mm]



PIN Power Inductor RCR-110D



Electrical Characteristics

Part Name	Stamp	Inductance (μ H) [within] ※1	D.C.R. (Ω) [Max.] (at 20°C)	Rated Current (A)※2
RCR110DNP-100M	100M	10 μ H $\pm$ 20%	0.023	3.51
RCR110DNP-120M	120M	12 μ H $\pm$ 20%	0.024	3.24
RCR110DNP-150M	150M	15 μ H $\pm$ 20%	0.036	2.88
RCR110DNP-180M	180M	18 μ H $\pm$ 20%	0.039	2.61
RCR110DNP-220M	220M	22 μ H $\pm$ 20%	0.042	2.34
RCR110DNP-270M	270M	27 μ H $\pm$ 20%	0.045	2.16
RCR110DNP-330L	330L	33 μ H $\pm$ 15%	0.057	1.89
RCR110DNP-390L	390L	39 μ H $\pm$ 15%	0.076	1.80
RCR110DNP-470L	470L	47 μ H $\pm$ 15%	0.10	1.62
RCR110DNP-560L	560L	56 μ H $\pm$ 15%	0.11	1.44
RCR110DNP-680L	680L	68 μ H $\pm$ 15%	0.15	1.35
RCR110DNP-820L	820L	82 μ H $\pm$ 15%	0.16	1.26
RCR110DNP-101L	101L	100 μ H $\pm$ 15%	0.19	1.08
RCR110DNP-121L	121L	120 μ H $\pm$ 15%	0.21	0.99
RCR110DNP-151L	151L	150 μ H $\pm$ 15%	0.23	0.90
RCR110DNP-181L	181L	180 μ H $\pm$ 15%	0.26	0.82
RCR110DNP-221L	221L	220 μ H $\pm$ 15%	0.29	0.74
RCR110DNP-271L	271L	270 μ H $\pm$ 15%	0.36	0.67
RCR110DNP-331L	331L	330 μ H $\pm$ 15%	0.51	0.61
RCR110DNP-391L	391L	390 μ H $\pm$ 15%	0.69	0.55
RCR110DNP-471L	471L	470 μ H $\pm$ 15%	0.98	0.51
RCR110DNP-561L	561L	560 μ H $\pm$ 15%	1.1	0.46
RCR110DNP-681L	681L	680 μ H $\pm$ 15%	1.2	0.42
RCR110DNP-821L	821L	820 μ H $\pm$ 15%	1.3	0.38
RCR110DNP-102L	102L	1.0 mH $\pm$ 15%	1.5	0.35

※1 Inductance Measuring condition at 1kHz .













※2 Rated current: The DC current at which the inductance decreases 90% of it's initial value or when $\Delta t=40^{\circ}\text{C}$ whichever is lower ($T_a=20^{\circ}\text{C}$).

PIN Power Inductor RCR-110D



Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) — ΔT

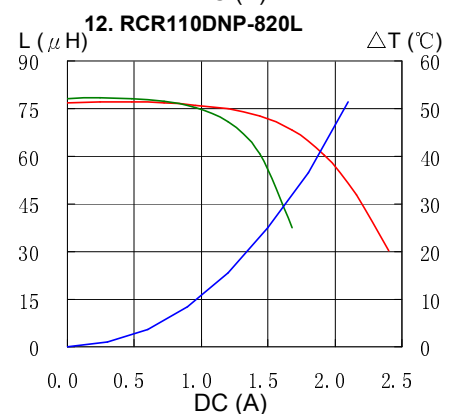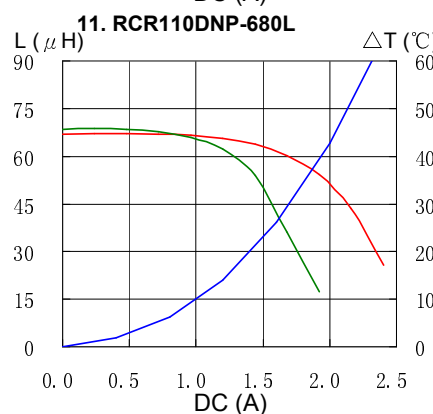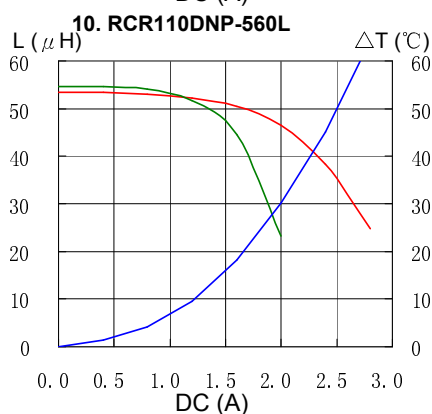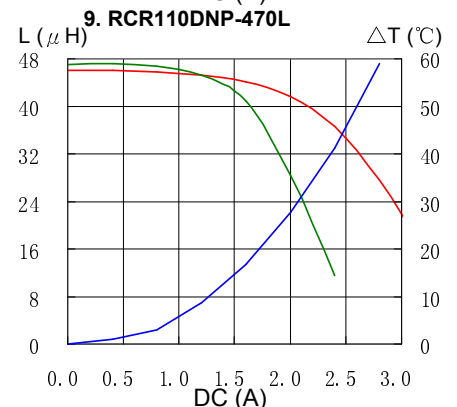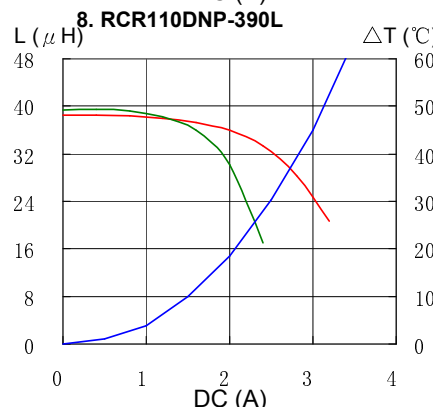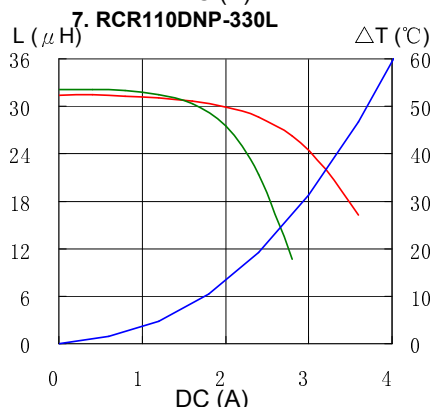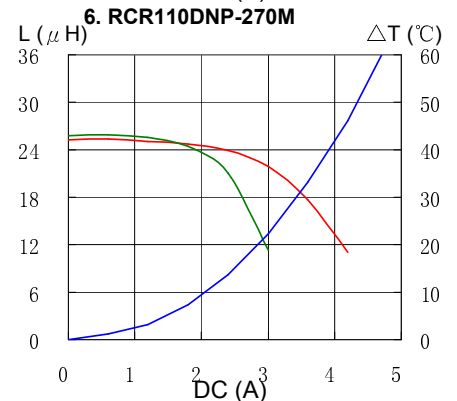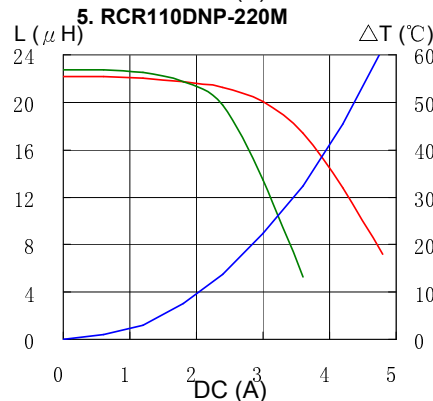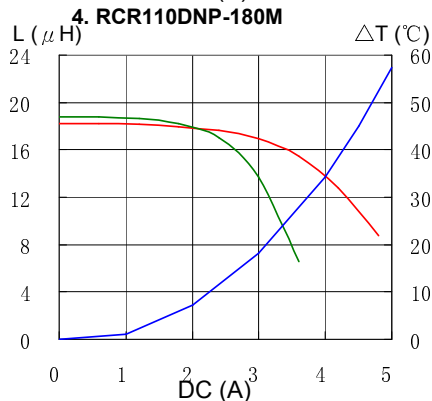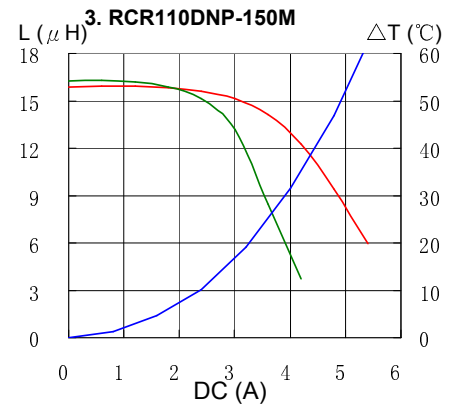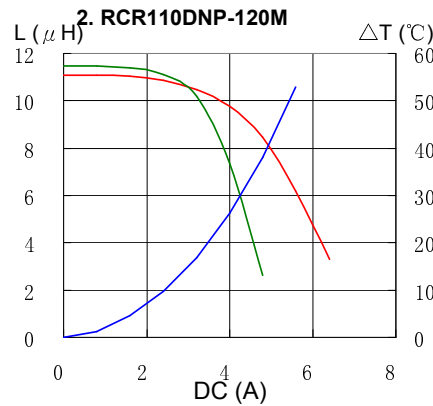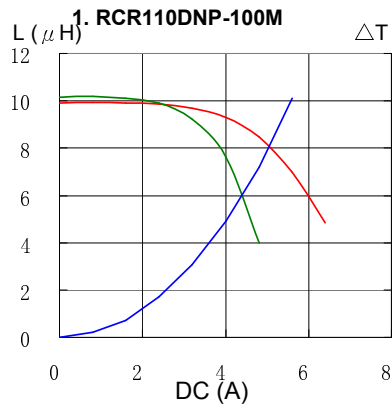



24. RCR110DNP-821L


Graph showing Inductance L (μH) versus DC Current (A) for the RCR110DNP-821L component. The graph also includes a secondary y-axis for Temperature Rise ΔT ($^{\circ}\text{C}$).

DC (A)	L (μH)	ΔT ($^{\circ}\text{C}$)
0.0	850	0
0.1	840	2
0.2	830	5
0.3	810	10
0.4	750	18
0.5	650	30
0.6	550	45

PIN Power Inductor RCR-110D



Saturation Current & Temperature Rise Graph

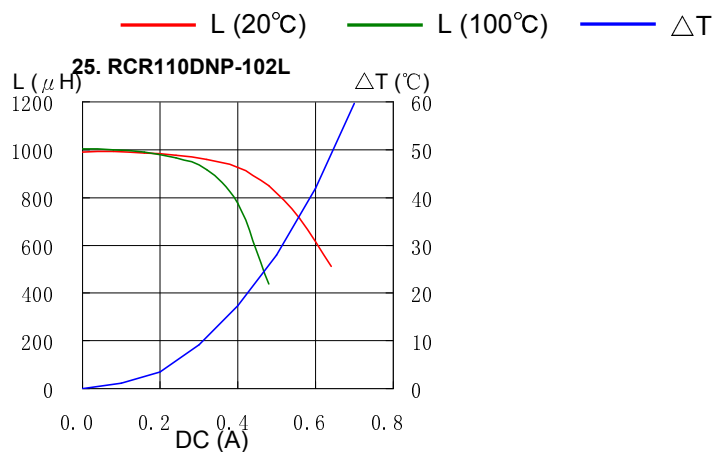

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6781
FAX. +852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel. +81-48-691-7300
FAX. +81-48-691-7340
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-21-5836-3299
FAX. +86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com