

**FEATURES**


- \* 0.54 INCH (13.8 mm) DIGIT HEIGHT.
- \* CONTINUOUS UNIFORM SEGMENTS
- \* LOW POWER REQUIREMENT.
- \* EXCELLENT CHARACTERS APPEARANCE.
- \* HIGH BRIGHTNESS & HIGH CONTRAST.
- \* WIDE VIEWING ANGLE.
- \* SOLID STATE RELIABILITY.
- \* CATEGORIZED FOR LUMINOUS INTENSITY.

**DESCRIPTION**


The LTP-3784E is a 0.54 inch (13.8 mm) digit height dual digit 14-segment alphanumeric display. This device utilizes green LED chips, which are made from GaP on a transparent GaP substrate, and has a gray face and white segments.

**DEVICE**

| PART NO.  | DESCRIPTION         |
|-----------|---------------------|
| GREEN     | Dual Common Cathode |
| LTP-3784G | Rt. Hand Decimal    |

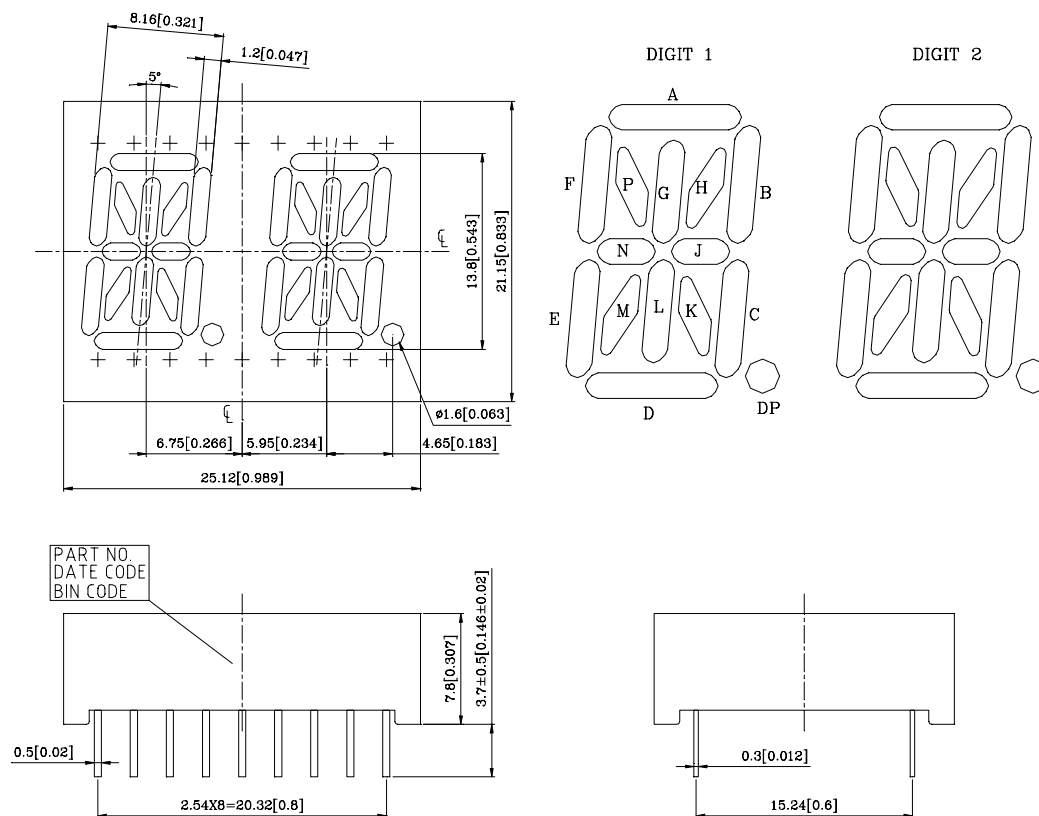**PACKAGE DIMENSIONS**


NOTES: All dimensions are in millimeters. Tolerances are  $\pm 0.25$ -mm (0.01") unless otherwise noted.

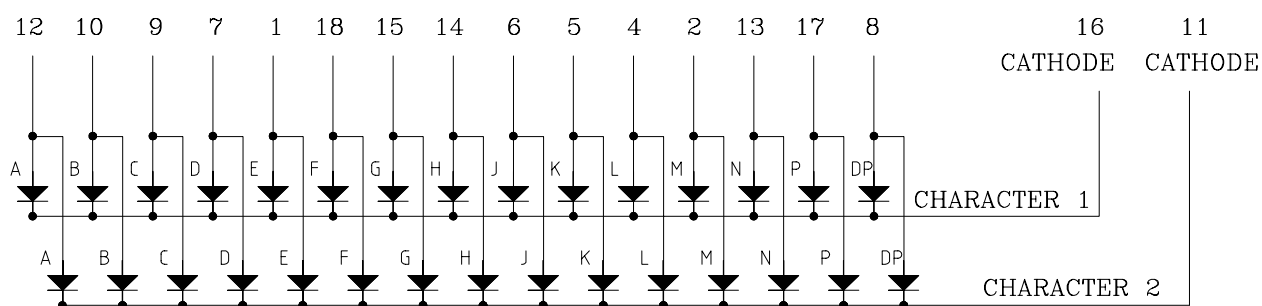**INTERNAL CIRCUIT DIAGRAM**


**PIN CONNECTION**

| <b>No.</b> | <b>CONNECTION</b>            |
|------------|------------------------------|
| 1          | ANODE E                      |
| 2          | ANODE M                      |
| 3          | NO CONNECTION                |
| 4          | ANODE L                      |
| 5          | ANODE K                      |
| 6          | ANODE J                      |
| 7          | ANODE D                      |
| 8          | ANODE D.P.                   |
| 9          | ANODE C                      |
| 10         | ANODE B                      |
| 11         | COMMON CATHODE , CHARACTER 2 |
| 12         | ANODE A                      |
| 13         | ANODE N                      |
| 14         | ANODE H                      |
| 15         | ANODE G                      |
| 16         | COMMON CATHODE , CHARACTER 1 |
| 17         | ANODE P                      |
| 18         | ANODE F                      |

**ABSOLUTE MAXIMUM RATING AT T<sub>A</sub>=25°C**

| PARAMETER                                                                                       | MAXIMUM RATING                           | UNIT               |
|-------------------------------------------------------------------------------------------------|------------------------------------------|--------------------|
| Power Dissipation Per Segment                                                                   | 75                                       | mW                 |
| Peak Forward Current Per Segment<br>(1/10 Duty Cycle, 1.0ms Pulse Width)                        | 100                                      | mA                 |
| Continuous Forward Current Per Segment                                                          | 25                                       | mA                 |
| Derating Linear From 25 <sup>0</sup> C Per Segment                                              | 0.33                                     | mA/ <sup>0</sup> C |
| Reverse Voltage Per Segment                                                                     | 5                                        | V                  |
| Operating Temperature Range                                                                     | -35 <sup>0</sup> C to +85 <sup>0</sup> C |                    |
| Storage Temperature Range                                                                       | -35 <sup>0</sup> C to +85 <sup>0</sup> C |                    |
| Solder Temperature: max 260 <sup>0</sup> C for max 3sec at 1.6mm[1/16inch] below seating plane. |                                          |                    |

**ELECTRICAL / OPTICAL CHARACTERISTICS AT T<sub>A</sub>=25°C**

| PARAMETER                         | SYMBOL            | MIN. | TYP. | MAX. | UNIT | TEST CONDITION       |
|-----------------------------------|-------------------|------|------|------|------|----------------------|
| Average Luminous Intensity        | I <sub>v</sub>    | 800  | 2300 |      | μcd  | I <sub>F</sub> =10mA |
| Peak Emission Wavelength          | λ <sub>p</sub>    |      | 565  |      | nm   | I <sub>F</sub> =20mA |
| Spectral Line Half-Width          | Δλ                |      | 30   |      | nm   | I <sub>F</sub> =20mA |
| Dominant Wavelength               | λ <sub>d</sub>    |      | 569  |      | nm   | I <sub>F</sub> =20mA |
| Forward Voltage Per Segment       | V <sub>F</sub>    |      | 2.1  | 2.6  | V    | I <sub>F</sub> =20mA |
| Reverse Current Per Segment       | I <sub>R</sub>    |      |      | 100  | μA   | V <sub>R</sub> =5V   |
| Luminous Intensity Matching Ratio | I <sub>v</sub> -m |      |      | 2:1  |      | I <sub>F</sub> =10mA |

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

## TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

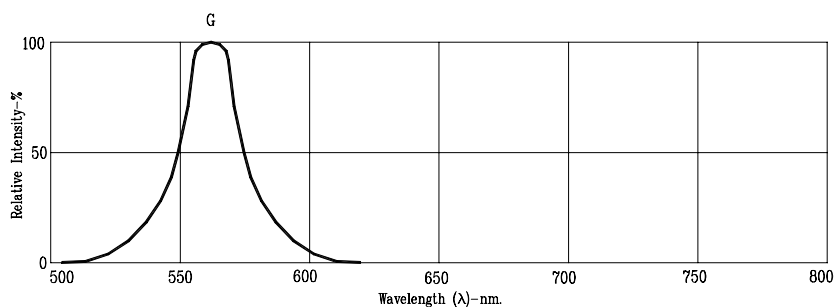


Fig1. RELATIVE INTENSITY VS. WAVELENGTH




Fig2. RELATIVE LUMINOUS EFFICIENCY (LUMINOUS INTENSITY PER UNIT CURRENT) VS. PEAK CURRENT (REFRESH RATE 1KHz)




Fig3. FORWARD CURRENT VS. FORWARD VOLTAGE




Fig4. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT




Fig5. MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE.




Fig6. MAX. PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE 1KHz)

NOTE: G=GREEN

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)