

D

D

C


C

B

B

A

A

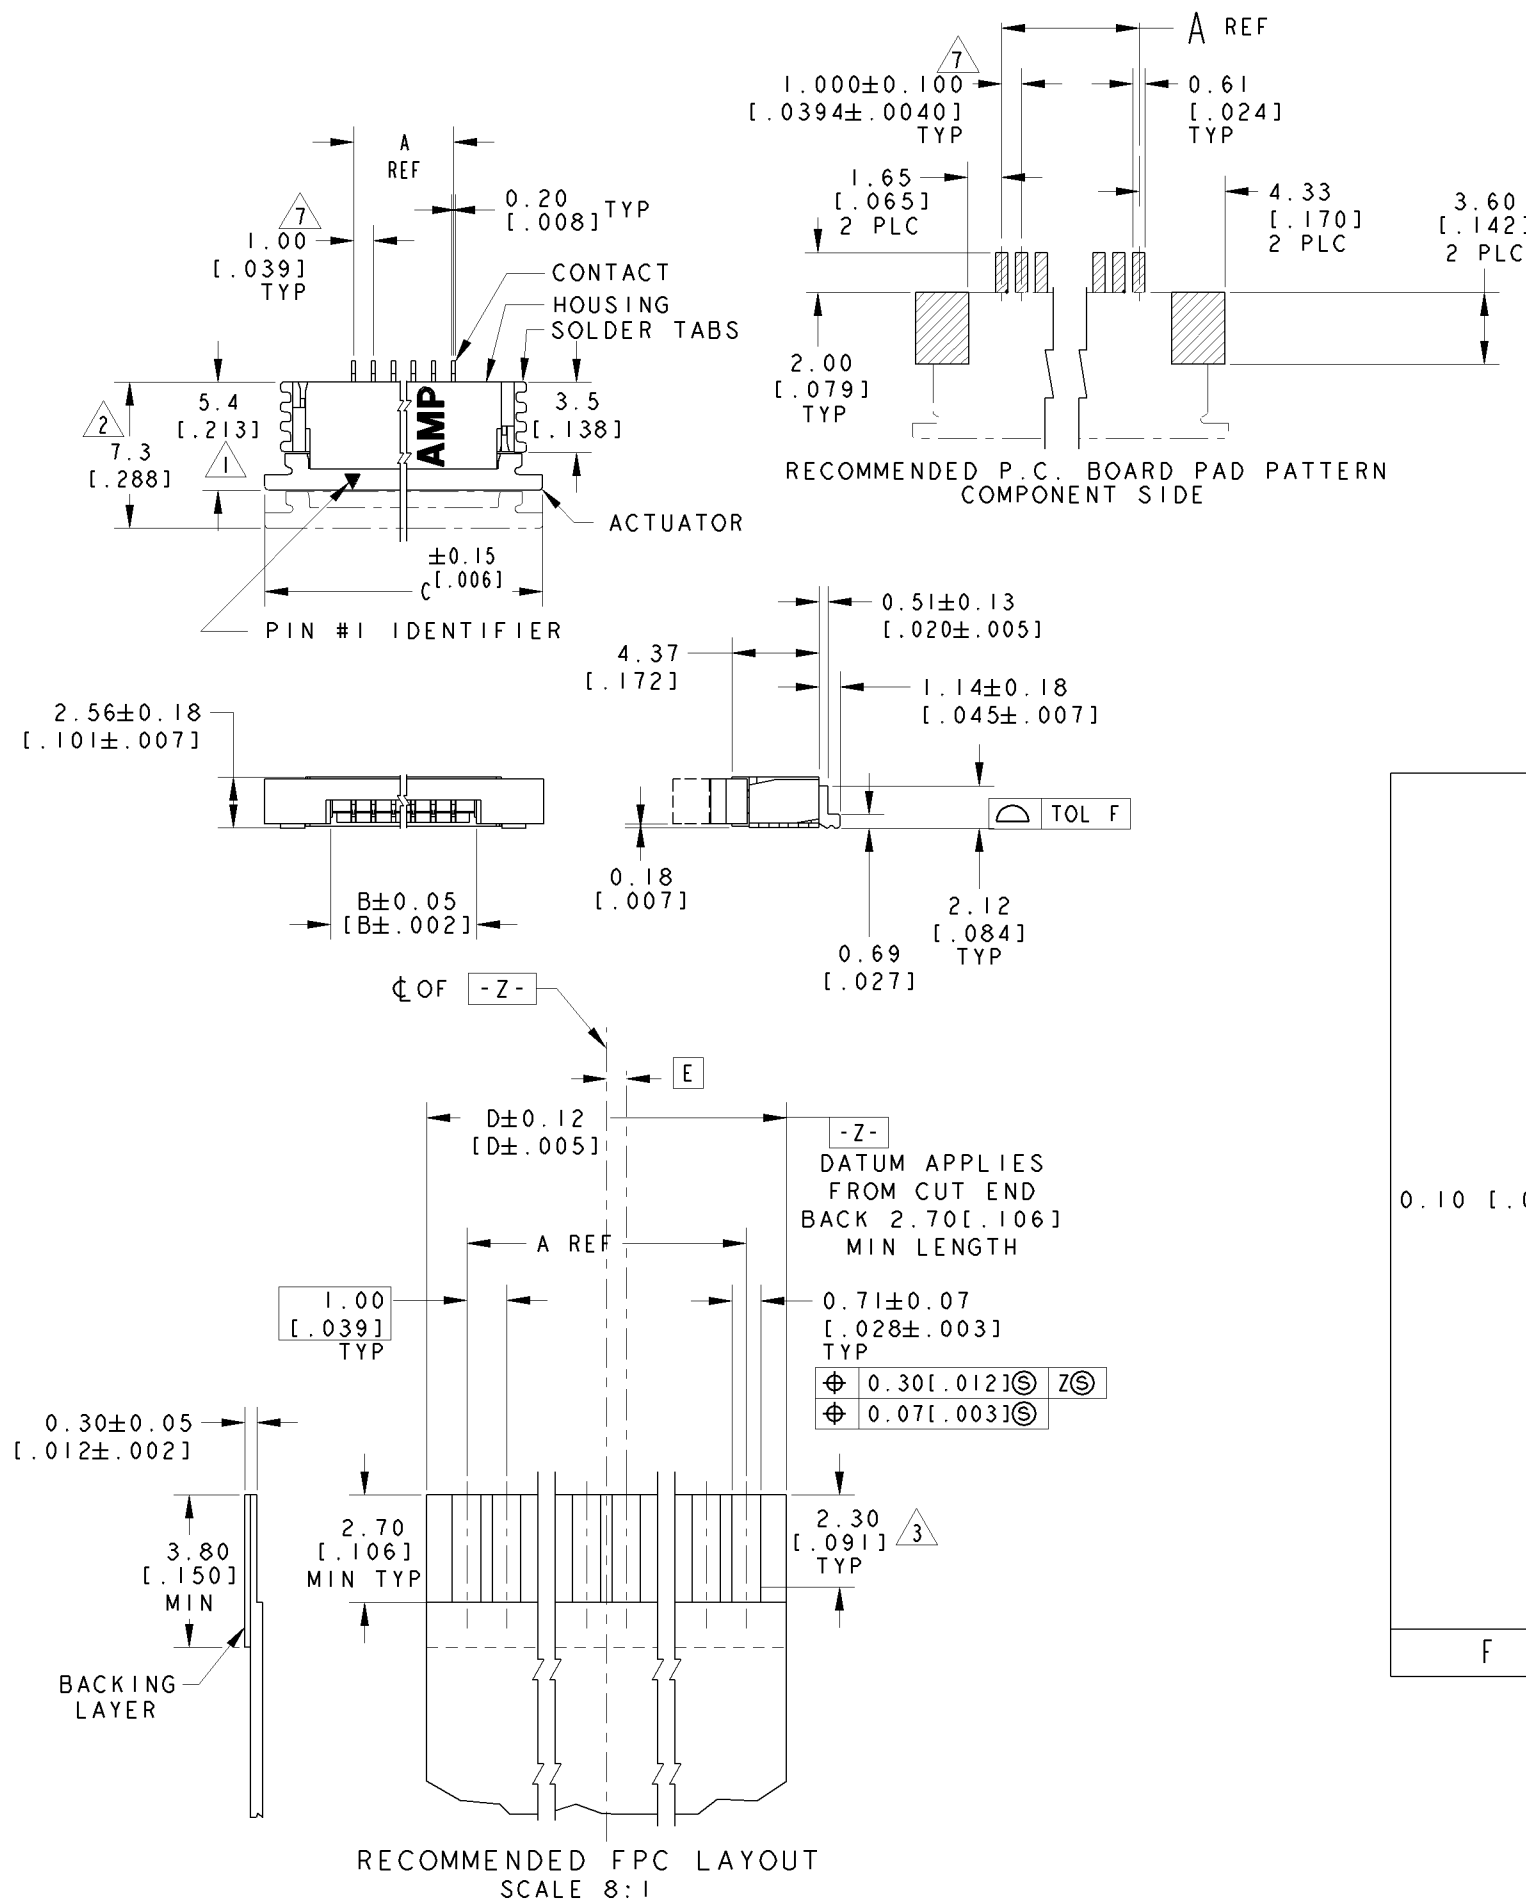

1. DIMENSION APPLIES WHEN ACTUATOR IS IN CLOSED POSITION.
2. DIMENSION APPLIES WHEN ACTUATOR IS IN OPEN POSITION.
3. MAXIMUM ENGAGEMENT LENGTH TO CONTACT POINT.
4. CONTACTS: 0.002[.00008] MIN. TIN OVER 0.00127[.000050] MIN. NICKEL.
5. SOLDER TABS: 0.00127[.000050] MIN. TIN.
6. PACKAGE PER EIA 481 SPECIFICATION.
7. TOLERANCE NON-CUMULATIVE.
8. MATERIAL: CONTACT: PHOSPHOR BRONZE.
SOLDER TABS: PHOSPHOR BRONZE.
HOUSING: GLASS REINFORCED POLYESTER (LCP), UL 94V-0, COLOR-NATURAL.
ACTUATOR: GLASS REINFORCED NYLON (PPA), UL 94V-0 OR GLASS
REINFORCED PPS, UL 94V-0, COLOR-BLACK.

0.10 [.004]	.50	31.00 [1.221]	37.92 [1.492]	31.18 [1.228]	29.0 [1.142]	30	3- 84952- 0
	-	30.00 [1.181]	36.92 [1.454]	30.18 [1.188]	28.0 [1.102]	29	2- 84952- 9
	.50	29.00 [1.142]	35.92 [1.414]	29.18 [1.149]	27.0 [1.063]	28	2- 84952- 8
	-	28.00 [1.102]	34.92 [1.375]	28.18 [1.109]	26.0 [1.024]	27	2- 84952- 7
	.50	27.00 [1.063]	33.92 [1.335]	27.18 [1.070]	25.0 [1.984]	26	2- 84952- 6
	-	26.00 [1.024]	32.92 [1.296]	26.18 [1.031]	24.0 [1.945]	25	2- 84952- 5
	.50	25.00 [1.984]	31.92 [1.257]	25.18 [1.991]	23.0 [1.906]	24	2- 84952- 4
	-	24.00 [1.945]	30.92 [1.217]	24.18 [1.952]	22.0 [1.866]	23	2- 84952- 3
	.50	23.00 [1.906]	29.92 [1.179]	23.18 [1.913]	21.0 [1.827]	22	2- 84952- 2
	-	22.00 [1.866]	28.92 [1.139]	22.18 [1.873]	20.0 [1.787]	21	2- 84952- 1
	.50	21.00 [1.827]	27.92 [1.099]	21.18 [1.834]	19.0 [1.748]	20	2- 84952- 0
	-	20.00 [1.787]	26.92 [1.060]	20.18 [1.794]	18.0 [1.709]	19	1- 84952- 9
	.50	19.00 [1.748]	25.92 [1.020]	19.18 [1.755]	17.0 [1.669]	18	1- 84952- 8
	-	18.00 [1.709]	24.92 [1.981]	18.18 [1.716]	16.0 [1.630]	17	1- 84952- 7
	.50	17.00 [1.669]	23.92 [1.942]	17.18 [1.676]	15.0 [1.591]	16	1- 84952- 6
	-	16.00 [1.630]	22.92 [1.902]	16.18 [1.637]	14.0 [1.551]	15	1- 84952- 5
	.50	15.00 [1.591]	21.92 [1.863]	15.18 [1.598]	13.0 [1.512]	14	1- 84952- 4
	-	14.00 [1.551]	20.92 [1.824]	14.18 [1.558]	12.0 [1.472]	13	1- 84952- 3
	.50	13.00 [1.512]	19.92 [1.784]	13.18 [1.519]	11.0 [1.433]	12	1- 84952- 2
	-	12.00 [1.472]	18.92 [1.745]	12.18 [1.480]	10.0 [1.394]	11	1- 84952- 1
	.50	11.00 [1.433]	17.92 [1.705]	11.18 [1.440]	9.0 [1.354]	10	1- 84952- 0
	-	10.00 [1.394]	16.92 [1.666]	10.18 [1.401]	8.0 [1.315]	9	84952- 9
	.50	9.00 [1.354]	15.92 [1.627]	9.18 [1.361]	7.0 [1.276]	8	84952- 8
	-	8.00 [1.315]	14.92 [1.587]	8.18 [1.322]	6.0 [1.236]	7	84952- 7
	.50	7.00 [1.276]	13.92 [1.548]	7.18 [1.283]	5.0 [1.197]	6	84952- 6
	-	6.00 [1.236]	12.92 [1.509]	6.18 [1.243]	4.0 [1.157]	5	84952- 5
	.50	5.00 [1.197]	11.92 [1.469]	5.18 [1.204]	3.0 [1.118]	4	84952- 4

F	E	D	C	B	A	POS	PART NO
---	---	---	---	---	---	-----	---------

DIMENSIONS mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN WYLEE 14MAY2003 CHK LP TAN APVD SF LEONG PRODUCT SPEC 108-1393 APPLICATION SPEC 114-1072 WEIGHT -		TE Connectivity NAME Imm FPC CONNECTOR, HORIZONTAL, SURFACE-MOUNT, BOTTOM CONTACT LEAD FREE VERSION	
MATERIAL 8		0 PLC ±.02 [.008] 1 PLC ±.01 [.004] 2 PLC ±.01 [.004] 3 PLC ±.01 [.004] 4 PLC ±.01 [.004] ANGLES FINISH 4 5		CUSTOMER DRAWING		SIZE A2 CAGE CODE 00779 DRAWING NO C=84952 SCALE 4:1 SHEET 1 OF 1 REV A4	

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com