


CONFIGURATION		PART NUMBER
Male Receptacle, 3 Pin, 16 Awg, Shell 12		RT00123PNH
DIMENSIONS		
 The technical drawing includes three views of the connector: a side view, a front view, and a panel cutout reference view. The side view shows the O-Ring, Insert, Shell, and Seal Gasket. Dimensions include a shell diameter of 19.00, an insert diameter of 17.55, a shell length of 11.30, a shell thickness of 1.80, and a maximum shell length of 32.5. The front view shows a square flange with a master keyway, four mounting holes of diameter 3.20, and a square body with dimensions 20.62 and 26.2. The panel cutout reference view shows a circular cutout with a diameter of 18.40 for front panel mounting and 21.85 for rear panel mounting, with four mounting holes of diameter 3.20. The thread is specified as UNEF 11/16-24.		
TECHNICAL DATA		
TEMPERATURE RANGE:	-40°C to + 105°C	
PROTECTION:	IP67 in mated condition and in combination with sealed backshell	
VOLTAGE RATING:	250V	
HOUSING BODY:	Zinc Alloy, Nickel Plated	
COUPLING NUT:	-	
INSERT:	Glass-filled Thermoplastic UL94-V0	
SEAL:	NBR	
CURRENT:	13A	
CONTACT SIZE:	16Awg	
APPROVALS:	UL ECBT2	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :

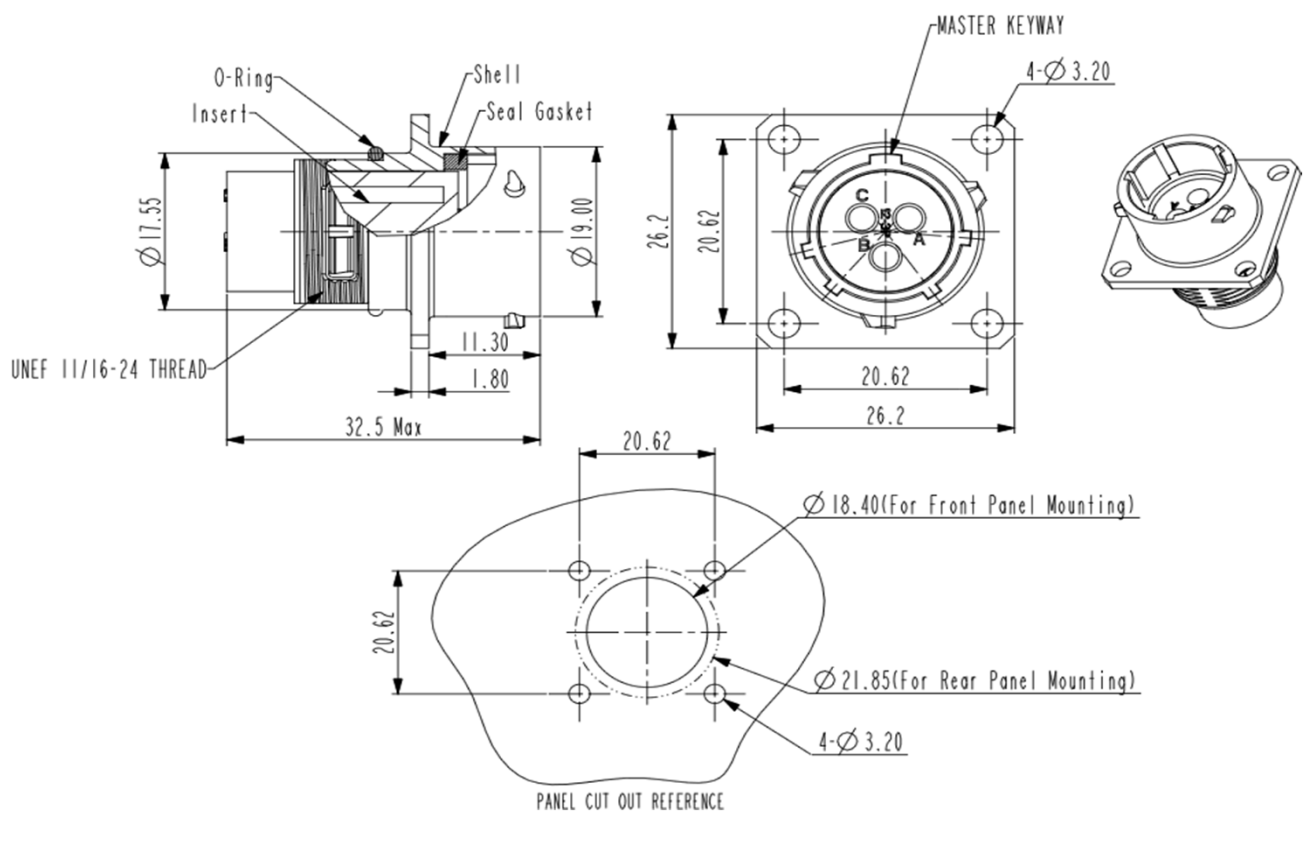

Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com