

NTC probes Stainless Part number 89750182



- Direct connection with no converter on analog input
- Easy-to-use and low-cost temperature control solution
- Fields of application : HVAC, compressors, geothermal systems, swimming pools, fountains
- Analog input configured as a potentiometer via the NTC functions in the M3 Soft (minimum AC 5)

Part numbers

Type	Description	Ohmic value	Measurement range
89750182 Stainless	NTC2 probe stainless 305 for Millenium 3 (24 V DC, ± 10 %)	10 kΩ @ 25 °C	-35 →+120 °C

Specifications

General characteristics

Environmental characteristics

Operating temperature	-25 →+85 °C	-25 →+85 °C	-25 →+120 °C	-20 →+105 °C	-40 →+200 °C
Storage temperature	-30 →+100 °C	-30 →+100 °C	-40 →+180 °C	-40 →+105 °C	-40 →+200 °C
Accuracy	-25 →+40 °C : ± 0,8 °C (repeatability ± 0,5 °C) +40 →+70 °C : ± 2 °C (repeatability ± 1 °C) +70 →+85 °C : ± 3 °C (repeatability ± 2 °C)	-25 →+40 °C : ± 0,8 °C (repeatability ± 0,5 °C) +40 →+50 °C : ± 1,2 °C (repeatability ± 1 °C) +50 →+60 °C : ± 1,4 °C (repeatability ± 1,4 °C) +60 →+70 °C : ± 2 °C (repeatability ± 2 °C) +70 °C →+85 : ± 3 °C (repeatability ± 2 °C)	-35 →+40 °C : ± 0,8 °C (repeatability ± 0,5 °C) +40 →+70 °C : ± 2 °C (repeatability ± 1 °C) +70 →+120 °C : ± 3 °C (repeatability ± 2 °C)	-20 →+40 °C : ± 0,8 °C (repeatability ± 0,5 °C) +40 →+70 °C : ± 2 °C (repeatability ± 1 °C) +70 →+105 °C : ± 3 °C (repeatability ± 2 °C)	0 →+40 °C : ± 3 °C (repeatability ± 1 °C) +40 °C →+140 °C : ± 2 °C (repeatability ± 1 °C) +140 °C →+180 °C : ± 3 °C (repeatability ± 1 °C)

Mechanical characteristics

Material	PVC	AS	Inox	POM (polyoxymethylene)	Silicone
Cable	PVC	2 wires	PVC (105 °C max.)	PVC (105 °C max.)	Silicone (200 °C max.)
Cable length	3000 mm	600 mm	3000 mm	3000 mm	800 mm
Protection rating	IP67	-	IP64	IP67	IP64
Isolation class	-	-	1	2	1
Dielectric strength according to IEC 335	-	1000 V AC / 1 mn	1250 V AC / 1 mn	-	2000 V AC / 1 mn
Dimensions	Threading 1/2" Length 68 mm	5 x 6 mm Length 15 mm	Ø 4,8 Length 30 mm	Ø 6 mm Length 30 mm	Ø 5 Length 30 mm


Comments

Accessories

Accessories	Operating temperature	Operating pressure	Code
Copper protective sleeve	-20 →+100 °C	10 bar	89750146
316 stainless steel protective sleeve	-20 →+400 °C	16 bar	89750147

Dimensions (mm)


89750182

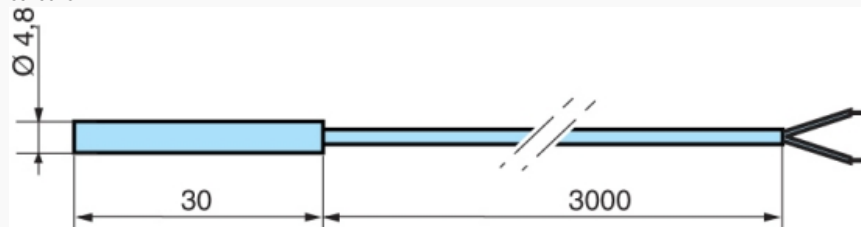

Connections

CA 89750183

⚠ 24V +/- 10%

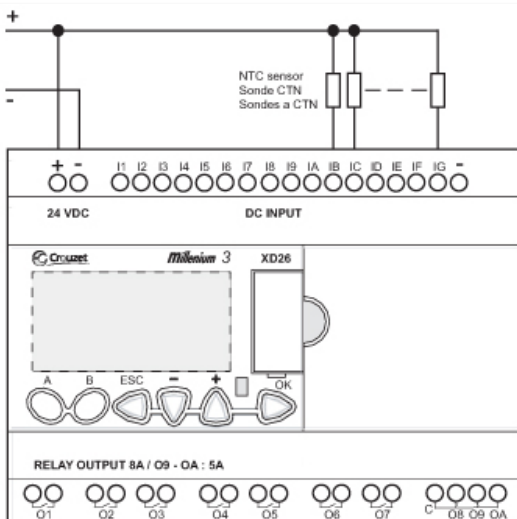

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com