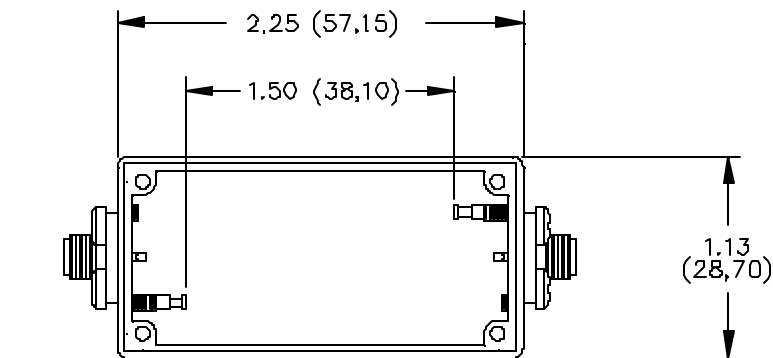


SCHEMATIC

MATERIALS:

Connector: 2 ea. SMA Receptacle. Body: Tarnish Resistant Plating, Center Contact: Gold Plated Beryllium Copper
Solder Turret Terminal Screws: Steel
Shielded Housing: Die cast aluminum alloy A380 or A384.
Finish: Blue paint per Federal Standard 595 #25109 over Phosphoric Etch
Cover: .040 Thick aluminum alloy #1100-H14
Finish: Clear Anodized
Screws: Steel 4 ea. #2-32 x 1/4" Pan Head, self-tapping

RATINGS:

Operating Voltage: Inner conductor/Shield: 335 VRMS Max.
Operating Temperature: -55°C to +150°C
Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 2399

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com