

Type 1032

Time Lag High Current Brick Fuse



Description

- »Time Lag High current brick fuse
- »Surface mount deign to save space
- »Ceramic Suqare body with end cap
- »Designed to GB 9364.7/UL 248-14/IEC 60127.7
- »Fully compatible with lead-free solder and high temperature profile



Electrical Characteristics for Series


Rating Current	100% of Ampere Rating	200% of Ampere Rating	1000%of Ampere Rating
2A~20A	1 Hour, Min	120Sec.Max	5ms Min. 150ms Max.

Electrical Characteristic Specifications by Item

Part No	Rated Voltage AC	Rated Voltage DC	Rated Current (A)	Breaking Capacity (A)ac 1	Breaking Capacity (A)dc 2	Typical Voltage Drop (mV)	Alpha Mark
10321200200	250 125	125 80	2	1500A@250V 300A@125V	300A@125V 1000A@80V	100	2A
10321315200			3.15			100	3.15A
10321400200			4			100	4A
10321500200			5			100	5A
10321630200			6.3			100	6.3A
10321800200			8			100	8A
10322100200			10			80	10A
10322125200			12.5	300A@250V 300A@125V	300A@125V 1000A@80V	80	12.5A
10322150200			15			80	15A
10322160200			16			80	16A
10322200200			20		300A@125V 600A@80V	80	20A

* DC Cold Resistance are measured at <10% of rated current in ambient temperature of 25degrees

Dimension

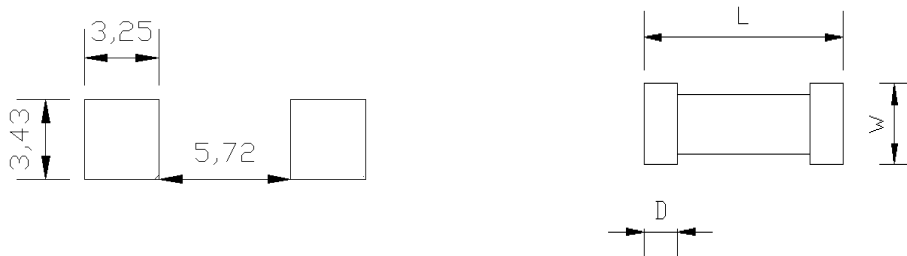

Current	L (mm)	D(mm)	W(mm)
2~20A	10.25±0.2	2.2±0.2	3.15±0.3

Recommend trace thickness is 3oz, the minimum trace width is 6mm (2A~10A) and 10mm (12.5A~20A).

Type 1032


Time Lag High Current Brick Fuse



Temperature Re-rating Curve


* Normal ambient temperature: 23+/-3°C

* Operating temperature: -55 ~ 125°C, with proper correction factor applied

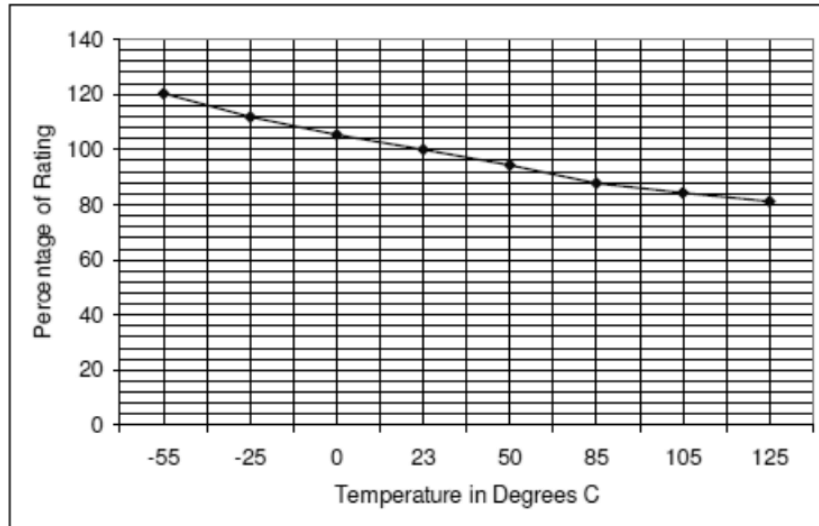

Solder reflow profile

Reflow Condition		Pb-Free assembly
Pre Heat	-Temperature Min($T_{s(min)}$)	150°C
	-Temperature Max($T_{s(max)}$)	200°C
	-Time (Min to Max)(t_s)	60-180 secs
Average ramp up rate (Liquidus Temp(T_L)to peak)		5°C/second max
$T_{s(max)}$ to T_L Ramp-up rate		5°C/second max
Reflow	-Temperature(T_L)(liquidus)	217°C
	-Temperature(t_L)	60-150 seconds
Time within 5°C of actual peak Temperature(t_p)		20-40 seconds
Ramp-down Rate		5°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		260°C

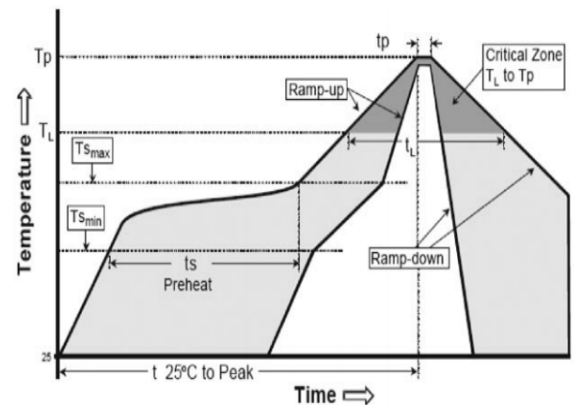

Part Number System

1032	2100	2	00	J
Fuse Type	Ampere Rating($10^2 \times 100mA = 10A$)	1:125V 2:250V	Standard Product	Gold plating

Packaging

Packaging Option	Packaging Specification	Quantity
1032	tape-and-reel	2000PCS