

SMD 418.0MHz SAW FILTER

AFS418S3

APPLICATION: Automotive Electronics/Remote Control



3.8 x 3.8 x 1.5mm

STANDARD SPECIFICATIONS:

CHARACTERISTICS	UNIT	MIN.	TYP.	MAX.
Center Frequency Fc	MHz	-	418	-
Bandwidth	MHz	-	Fc + 2.0	-
Insertion Loss @ Passband	dB	-	-	4.5
Ripple @ Passband	dB	-	-	2
Relative Attenuation				
Fc-100 ~ Fc-40.8 MHz	dB	55		-
Fc+40.8 ~ Fc+100 MHz	dB	55		-
DC Voltage	V	10		
Source Power	dBm	0		
Operating Temperature	°C	-10°C to +50°C		
Storage Temperature	°C	-45°C to +85°C		
Terminating Impedance	-	150Ω/0 pF		


Electrostatic Sensitive Device. Handle with precaution.

MARKING:


- 418.00 (418.0 Frequency in MHz)
- AF ZYX (ZY: Date code Z for month from A to L; Y for year, i.e. 4 for 2004
X: Traceability code)

PIN NO.	CONNECTIONS
2	Input
5	Output
All Others	Ground

FREQUENCY RESPONSE:

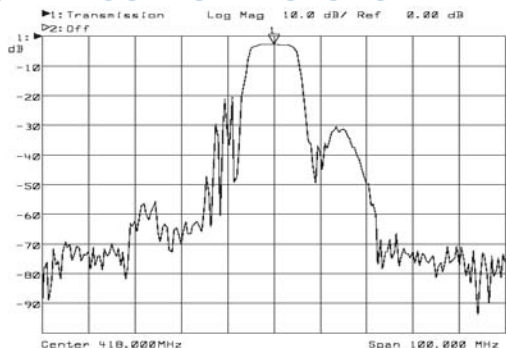


TEST CIRCUIT:

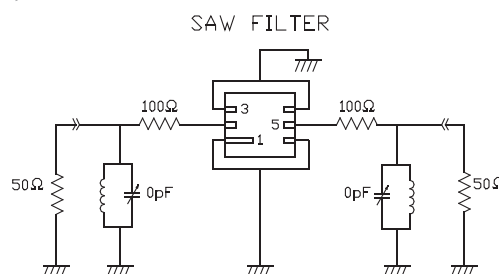

Please refer to ABRACON's Chip Inductor Series AISC-0603 for Test Inductors

OUTLINE DRAWING:

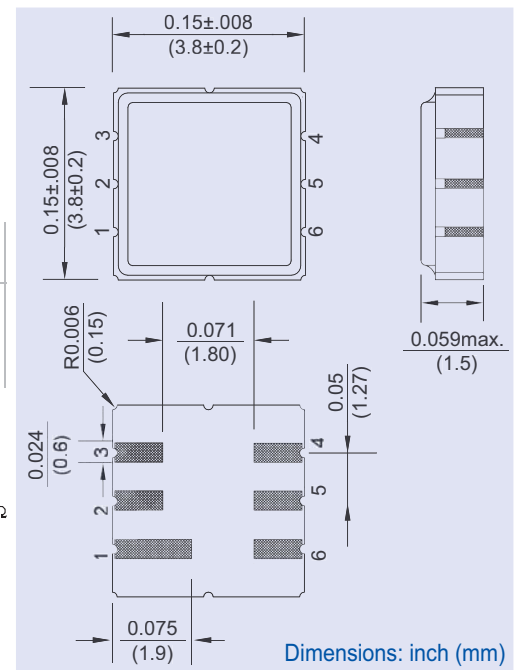

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com