

PS 1061 Test Probe, Ø 2 mm, 10 A



Description

- Test Probe
- diameter 2.0 mm

Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [CAD-Drawings](#), [Accessories](#), [Detailed request for product](#)

Technical Data

Diameter	2mm
Rated current	10A
Allowable Operation Temp.	-25 °C to 70 °C


Resistance to Soldering Heat	260 °C / 5 sec acc. to IEC 60068-2-20 , Test Tb, method 1A
------------------------------	--

Weight	0.5g
--------	------

Material: Housing	Thermoplastic (PC), UL 94V-2
-------------------	------------------------------

Surface of contacts	gold plated , Thickness 1.0µm
---------------------	-------------------------------

Dimensions

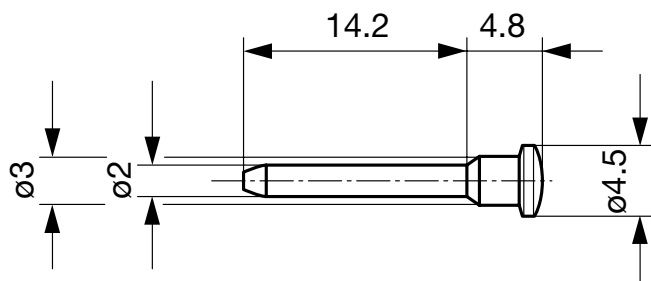

All Variants

Product group	Color	Order Number
Test Probe	red	0040.1062

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 100 Pcs

Mating Outlets/Connectors

Category / Description



[Test Jacks & Probes Overview complete](#)

PB 1011 Test Jack, PCB Mounting, Ø 2 mm, 10 A	PB 1011
PB 1021 Test Jack, PCB Mounting, Ø 2 mm, 6.3 A	PB 1021
PB 1101 Test Jack, PCB Mounting, Ø 2 mm, 10 A	PB 1101
PB 1111 Test Jack, PCB Mounting, Ø 2 mm, 10 A	PB 1111
PB 1151 Test Jack, PCB Mounting, Ø 2 mm, 6.3 A	PB 1151

[Test Jacks & Probes further types to PS 1061](#)

...

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com