
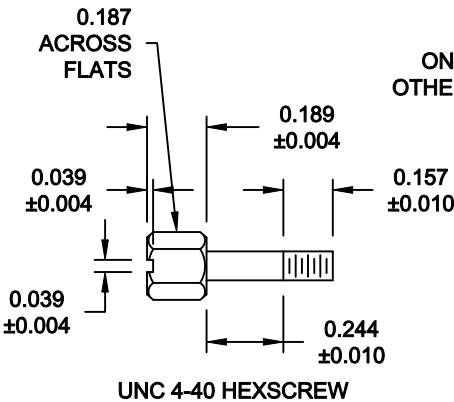
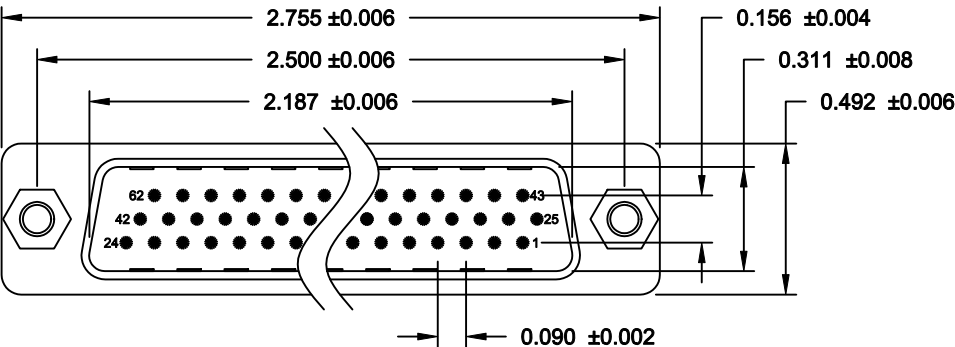
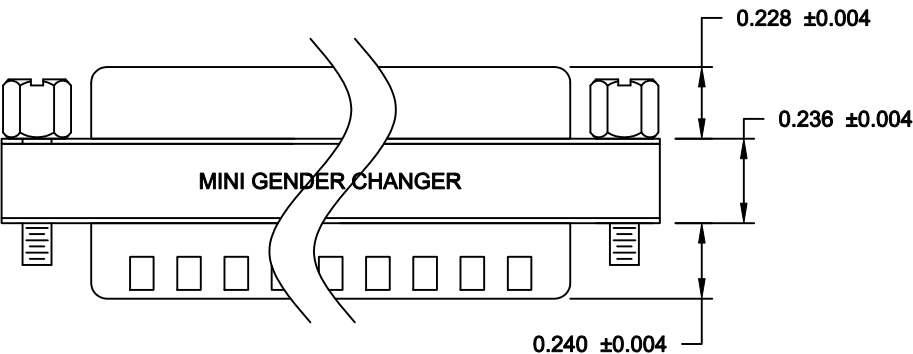


SPECIFICATION:

INSULATOR: PBT GLASS FIBER REINFORCED
UL 94VO
CONTACT: BRASS
CONTACT PLATING: GOLD PLATED OVER NICKEL
SHELL: TIN PLATED SHELL
CURRENT RATING: 3 AMP
DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
INSULATION RESISTANCE: 1,000 MegOHMS MIN @500 VDC
TEMPERATURE: -55° C - +105° C

NOTE:

LABEL: YELLOW COLOR WITH
BLACK CHARACTORS
ONE SIDE: MINI GENDER CHANGER
OTHER SIDE: U.S.A. PATENT 5199906

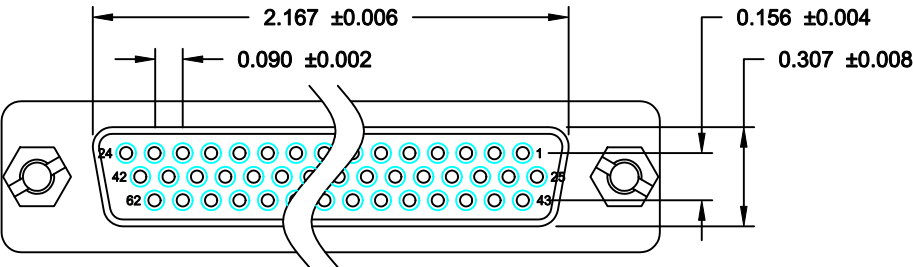

62-PIN MALE		62-PIN FEMALE
1	---	1
2	---	2
3	---	3
~		
61	---	61
62	---	62
SHELL	---	SHELL
PIN OUT		

DO NOT SCALE FROM DRAWING

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF NorComp AND
SHALL NOT BE REPRODUCED, COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OF SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

NorComp

DRAWN:
C. SMITH

DATE:
10-15-07

CHECKED:

DATE:

SCALE:
1.5 : 1

SHEET
1 OF
1

REV
1

DWG NO.

GCHDLP62M62F

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com