




Copyright FCI.





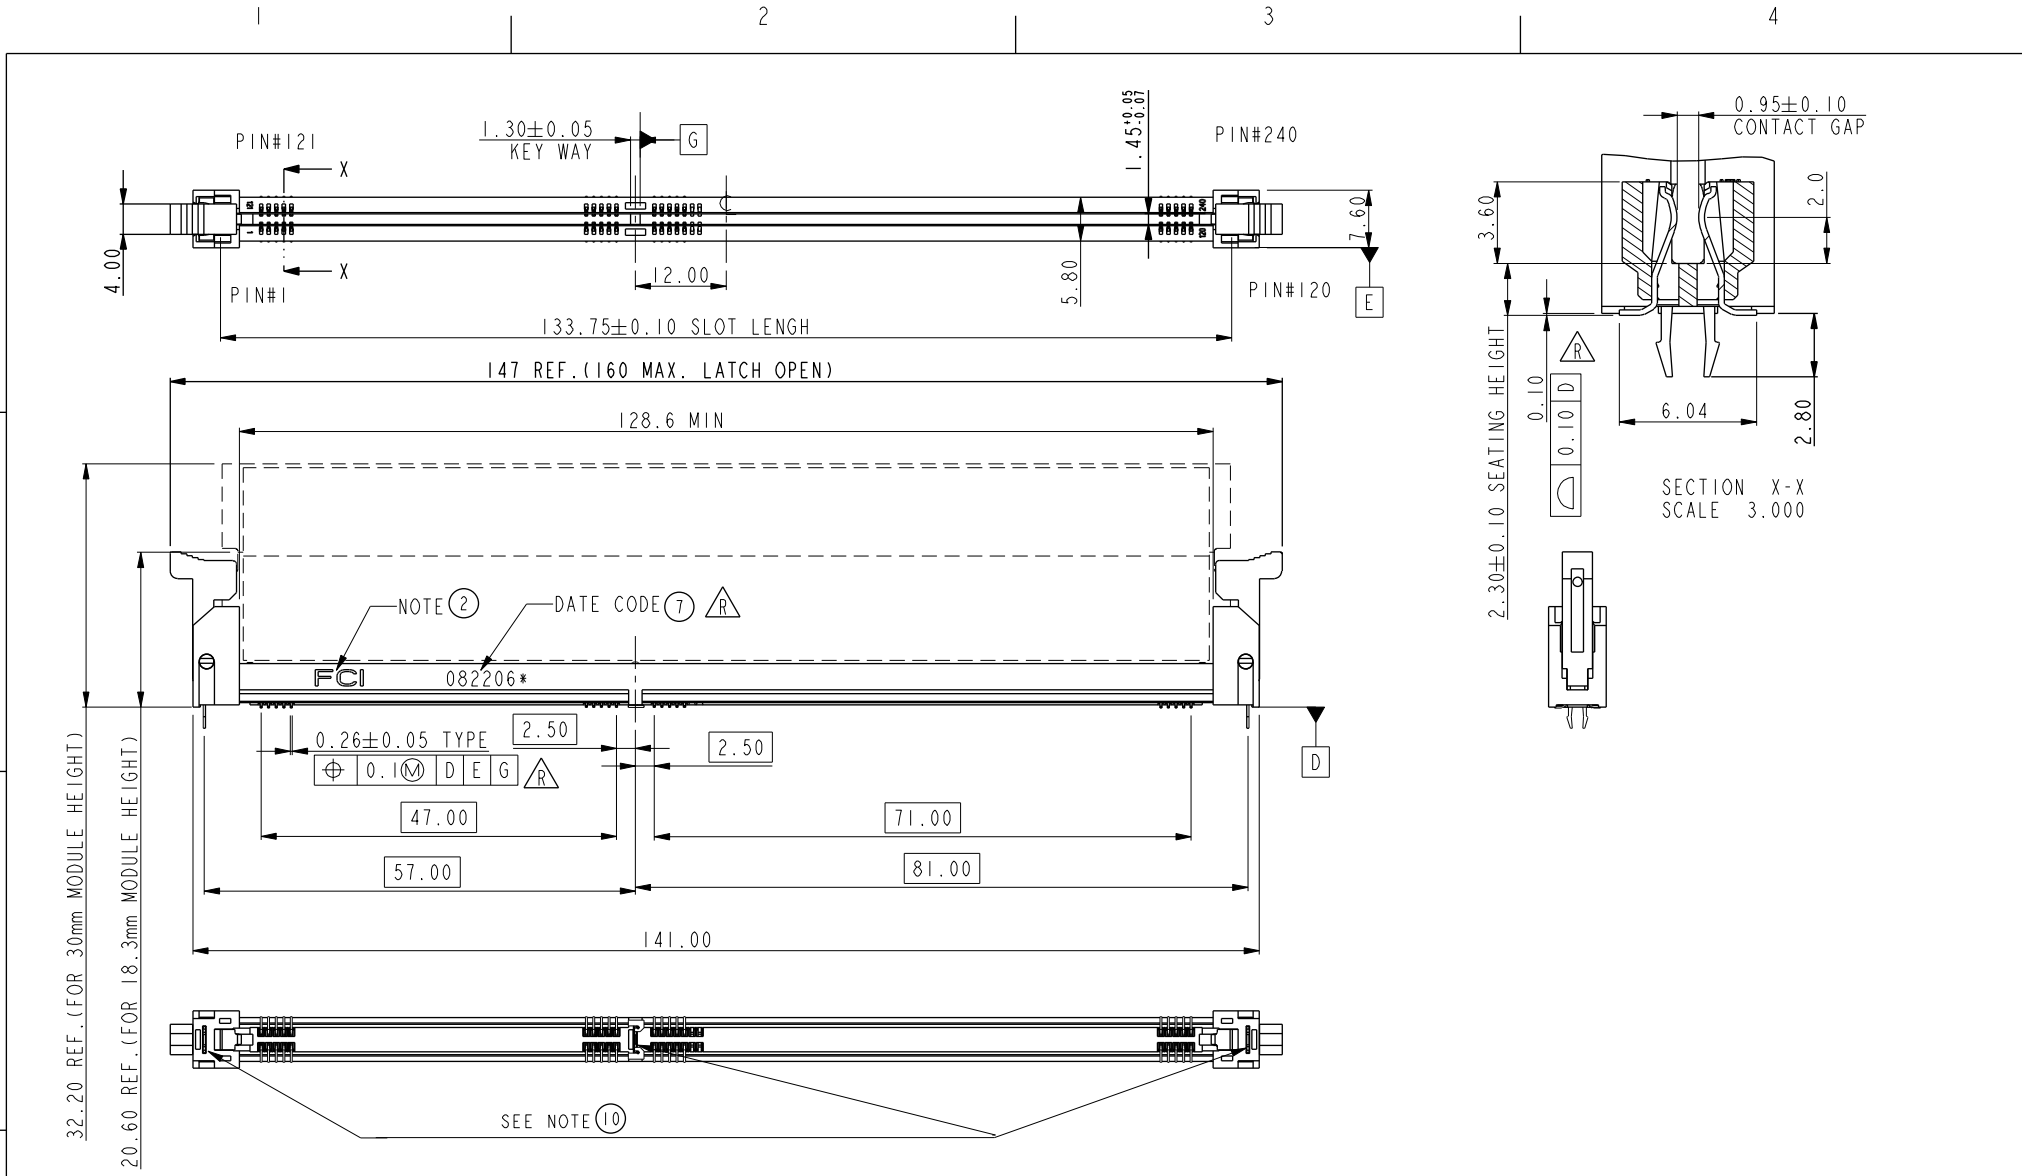


spec ref		*		dr	Rick Bian	2010/07/03	projection	MM	size	A4	scale	1.000					
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Eric Jiang	2014/07/31			ecn no	ELX-DG-18366-1							
				chr	Jian Huang	2014/08/04											
				appr	Pei-Ming Zheng	2014/08/04						product family	rel level	Released			
surface		linear	0.X	±0.50	FCi	title	SMT DDRIII SOCKET ASS'Y DDRIII,240P RDIMM SOCKET(FOR CISCO)		dwg no	10074146						rev	R
ASME Y14.5																	
angular												0°	±2°	www.fci.com	cat. no.		

Print File - REV C - 2009-06-09



Copyright FCI.

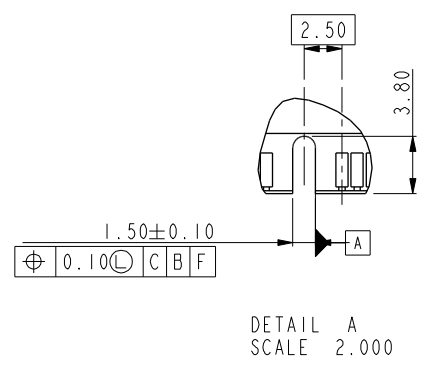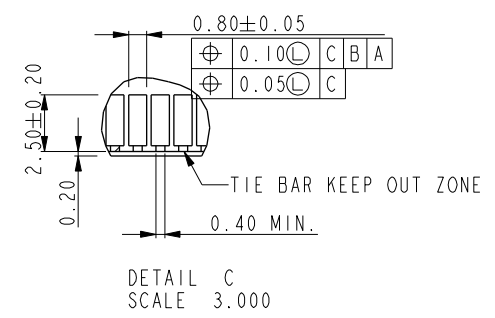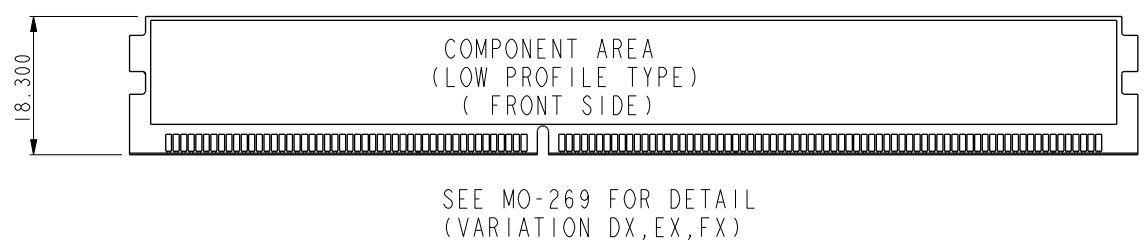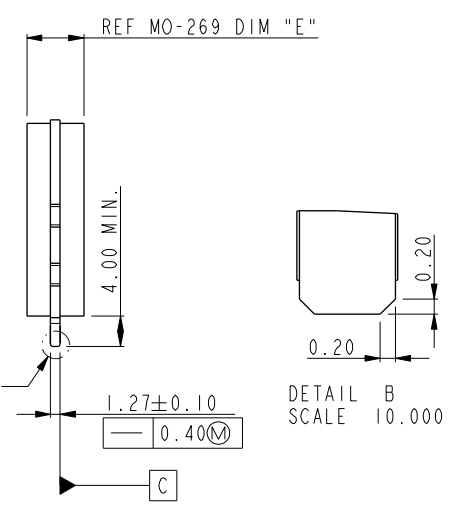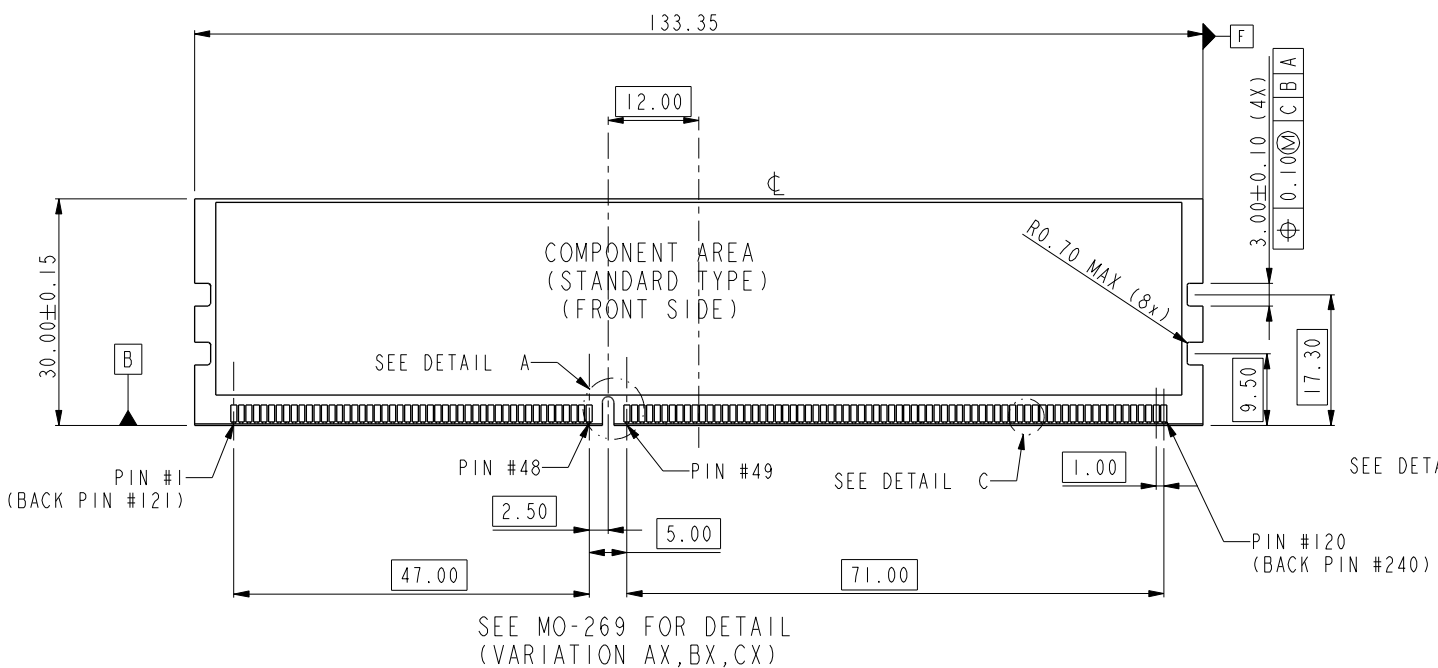

dr	Rick Bian	2010/07/03	projection	MM	size	A4	scale	1.000
eng	Eric Jiang	2014/07/31			ecn no	ELX-DG-18366-1		
chr	Jian Huang	2014/08/04			rel level	Released		
appr	Pei-Ming Zheng	2014/08/04	product family					
www.fci.com		title	SMT DDRIII SOCKET ASS'Y DDRIII,240P RDIMM SOCKET(FOR CISCO)			dwg no	10074146	rev
cat. no.		*	Product - Customer Drw			sheet 2 of 4		



Copyright FCI.

A

B

C


D

A


B

C


D

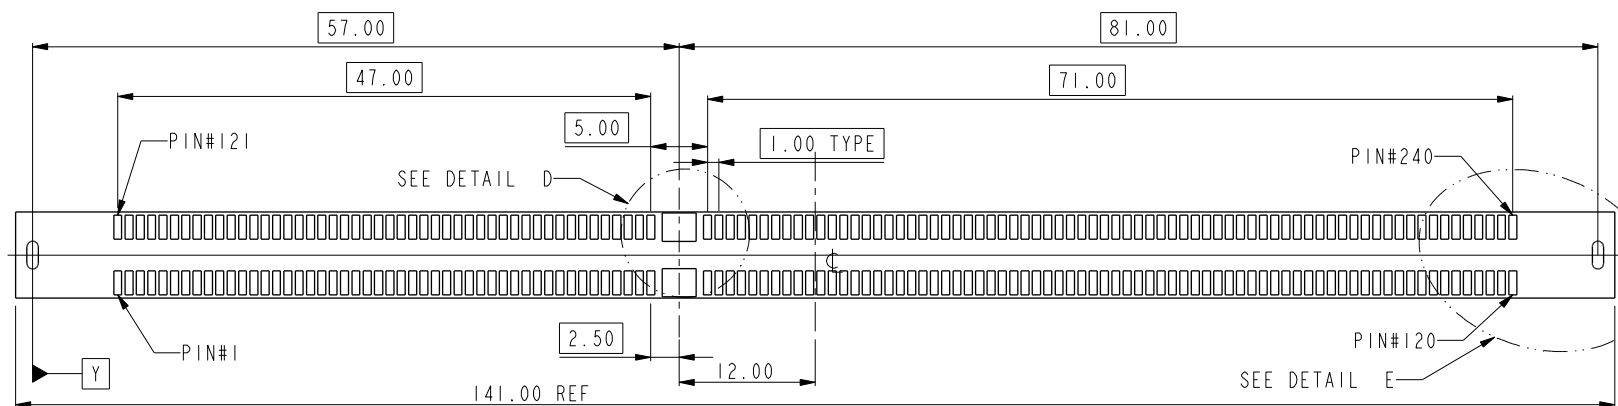


RECOMMEND CIRCUIT BOARD LAYOUT

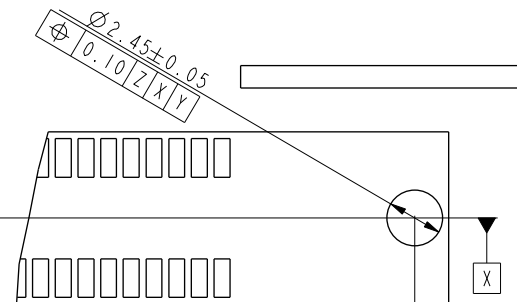

DETAIL E
SCALE 3.000
standard hole for
hold-down clips.

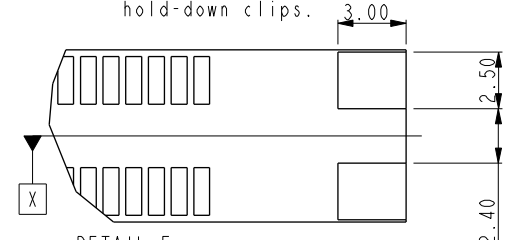


DETAIL E
SCALE 3.000
For smt holdown type.

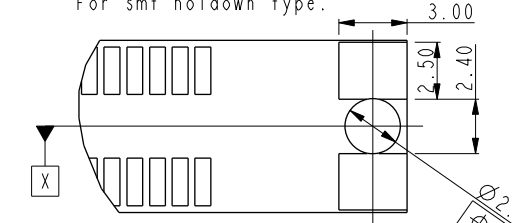


DETAIL E
SCALE 3.000


For 3 smt holdown + 2 plastic post type.

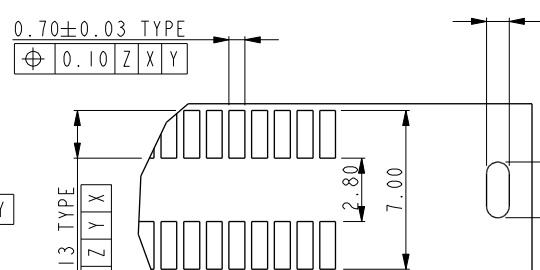


DETAIL E
SCALE 3.000
For paste-in-hole applications.
Can be used to solder clips
during reflow operation.

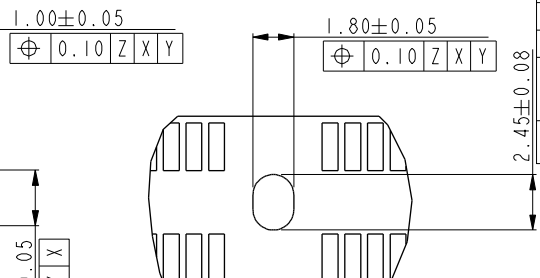


DETAIL D
SCALE 3.000
Center post type



DETAIL D
SCALE 3.000
Center smt holdown type

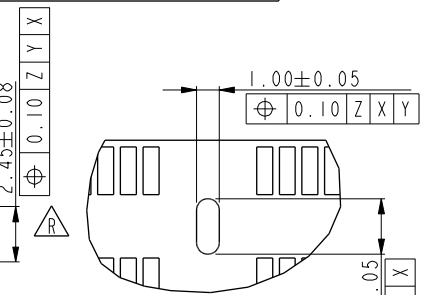

DETAIL D
SCALE 3.000
Center forklock type

dr	Rick Bian	2010/07/03	projection  MM 	size	A4	scale	1.000
eng	Eric Jiang	2014/07/31		ecn no	ELX-DG-18366-1		
chr	Jian Huang	2014/08/04			rel level		
appr	Pei-Ming Zheng	2014/08/04	product family				
		title			dwg no		rev
		SMT DDRIII SOCKET ASS'Y			10074146		R
DDRIII,240P RDIMM SOCKET(FOR CISCO)							
www.fci.com		cat. no.			Product - Customer Drw		sheet 3 of 4




Copyright FCI.

A


B

C

D



SCALE 0.500
10074146-10***
CENTER SMT HOLDOWN TYPE




SCALE 0.500
10074146-11***
3 FORKLOCK TYPE



SCALE 0.500
10074146-12***
3 SMT HOLDOWN TYPE



SCALE 0.500
10074146-13*** SEE DETAIL N
3 SMT HOLDOWN AND 2 PLASTIC POST TYPE



SCALE 0.500
10074146-15*** SEE DETAIL M
3 PLASTIC POST TYPE

NOTES:

1. MATERIAL:
HOUSING: HIGH PERFORMANCE RESINS, GLASS FILLED UL94V-0 RATED.
EJECTOR: HIGH PERFORMANCE RESINS, GLASS FILLED UL94V-0 RATED.
TERMINAL: HIGH PERFORMANCE COPPER ALLOY
METAL CLIP: COPPER ALLOY.
2. FCI LOGO TO BE APPROXIMATELY LOCATED AS SHOWN ON PRINT.
3. PRODUCT SPECIFICATION: GS-12-481.
4. PACKAGING SPECIFICATION: GS-14-899.
5. RECOMMENDED STENCIL THICKNESS NO LESS THAN 0.15 mm.
6. FOR OPTIMUM PERFORMANCE, THE TIE BAR IS TO BE ON AN INTERNAL LAYER SO THAT THE REMNANT CANNOT CAUSE CONTACT DAMAGE.
7. THE DATE CODE IS SHOWN "MMDDYY*.". "*" MEANS PRODUCTION LINE.
8. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
9. THE HOUSING WILL WITH STAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN AN IR REFLOW SOLDERING APPLICATION.
10. THE HOLDOWN TYPES ARE OPTION FOR FORKLOCK OR SMT HOLDOWN.
11. A SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION

STYLE : MECHANICAL KEYING


1 : 1.5 VOLT. W/ CENTER KEY

HOLD DOWN TYPE


- 0 : CENTER HOLD DOWN, FORKLOCK AT BOTH END
1 : 3 FORKLOCK TYPE
2 : 3 SMT HOLDOWN TYPE
3 : 3 SMT HOLDOWN AND 2 PLASTIC POST
5 : 3 PLASTIC POST TYPE

PACKAGE AND MYLAR OPTION


- 0: SOFT TRAY WITHOUT MYLAR (OBSOLETE)
 1: HARD TRAY WITH MYLAR
 2: HARD TRAY WITHOUT MYLAR
 3: SOFT TRAY WITH MYLAR (OBSOLETE)




DETAIL N
SCALE 5.000



DETAIL J
SCALE 5.000



SECTION K-K
SCALE 5.000




DETAIL M
SCALE 5.000

PLATING				
CODE	CONTACT	SOLDERTAIL	UNDERPLATE	NOTE
1	10u" (0.25um) MIN. GOLD	100u" (2.54um) TIN-LEAD	50u" (1.27um) MIN. NICKEL OVERALL	CONTACT NON-LUBRICATED
2	15u" (0.38um) MIN. GOLD			
3	30u" (0.76um) MIN. GOLD			
4	GOLD FLASH			
5	10u" (0.25um) MIN. GOLD	100u" (2.54um) MIN. 100% MATT TIN	50u" (1.27um) MIN. NICKEL OVERALL	CONTACT LUBRICATED
6	15u" (0.38um) MIN. GOLD			
7	30u" (0.76um) MIN. GOLD			
8	GOLD FLASH			
1LF	10u" (0.25um) MIN. GOLD	100u" (2.54um) MIN. 100% MATT TIN	50u" (1.27um) MIN. NICKEL OVERALL	CONTACT NON-LUBRICATED
2LF	15u" (0.38um) MIN. GOLD			
3LF	30u" (0.76um) MIN. GOLD			
4LF	GOLD FLASH			
5LF	10u" (0.25um) MIN. GOLD	100u" (2.54um) MIN. 100% MATT TIN	50u" (1.27um) MIN. NICKEL OVERALL	CONTACT LUBRICATED
6LF	15u" (0.38um) MIN. GOLD			
7LF	30u" (0.76um) MIN. GOLD			
8LF	GOLD FLASH			

COLOR OF HOUSING AND EJECTOR

- 0 : BLACK HOUSING + IVORY EJECTOR
1 : BLACK HOUSING + BLACK EJECTOR
2 : BLACK HOUSING + BLUE(661C) EJECTOR
3 : BLACK HOUSING + YELLOW(123C) EJECTOR

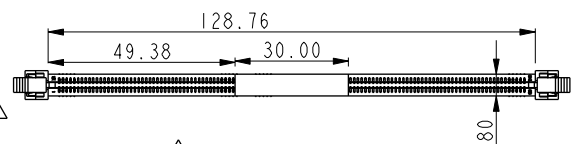

SCALE 0.500
WITH MYLAR TAPE (OPTIONAL)

dr	Rick Bian	2010/07/03	projection	MM	size	A4	scale	1.000
eng	Eric Jiang	2014/07/31			ecn no	ELX-DG-18366-1		
chr	Jian Huang	2014/08/04						
appr	Pei-Ming Zheng	2014/08/04			product family		rel level	
		title			dwg no			rev
		SMT DDRIII SOCKET ASS'Y			10074146			R
		DDRIII,240P RDIMM SOCKET(FOR CISCO)						
www.fci.com		cat. no.	*	Product - Customer Drw			sheet 4 of 4	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com