

# Model 485HESP **RS-422 & RS-485 High-Energy Surge Protector**( €

The Model 485HESP is designed to help protect against lightning strikes, power surges, and other types of voltage disturbances. Three RS-422/485 signals on terminal blocks are supported with a clamping voltage of approximately 6.8 volts. The 485HESP offers

three stages of protection starting with a gas discharge tube followed by a series resistor and finally a Transient Voltage Suppresser (TVS). In order for a surge protector to work properly it is important to have a good connection to earth ground. The 485HESP offers two terminal posts and two metal mounting brackets which provide a good ground connection for the user. The 485HESP has been tested to two specifications at 6 kilovolts, IEC 1000-4-5: 1995 "Surge Immunity Test" and IEEE C62.41-1991 "IEEE Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits". To ensure the best protection of your equipment some simple connection guidelines should be followed.

#### **Connections**

- 1. The 485HESP should be located as close as possible to the equipment being protected.
- 2. A good ground connection must be made between the 485HESP and earth ground. This can be done with the two terminal posts on the top of the unit or the two mounting brackets.
- 3. The earth ground connection should be kept as short as possible for best performance. As a recommendation a minimum of 10 gauge copper wire at no more than 3 feet should be used. If it is not possible to achieve the short distance a braided cable made specifically for grounding purposes should be used.
- 4. The chassis ground of the equipment should be connected to the buildings 3 prong plug ground.

#### **Specifications**

Clamping Voltage, stage one: Min. 72 VDC, Max.108 VDC

Series Resistance, stage two: 2.7 Ohms

Clamping Voltage, stage three: Min. 6.45V, Max 7.14 V

• Clamping Time: Less than 5 x10<sup>-9</sup> seconds

Connectors: 3 Position Terminal Blocks

Dimensions: Approximately 11.4 x 8.4 x 4.6 cm (4.5 X 3.3 X 1.8 in)

• Weight: Approximately .18 kg (6.4 oz)

#### DECLARATION OF CONFORMITY

Manufacturer's Name: B&B Electronics Manufacturing Company

Manufacturer's Address: P.O. Box 1040 707 Dayton Road Ottawa, IL 61350 USA

Model Number: 485HESP

Description: RS-422/485 High Energy Surge Protector

Type: Light industrial ITE equipment


Application of Council Directive: 89/336/EEC Standards: EN 55022

EN 61000-6-1 EN 61000 (-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11)


Robert M. Paratore, Director of Engineering





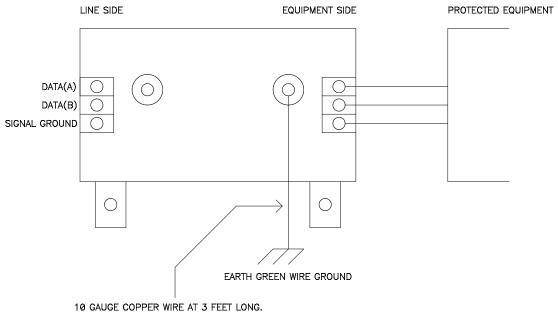

OR BRAIDED CABLE MADE SPECIFICALLY FOR GROUNDING PURPOSES.

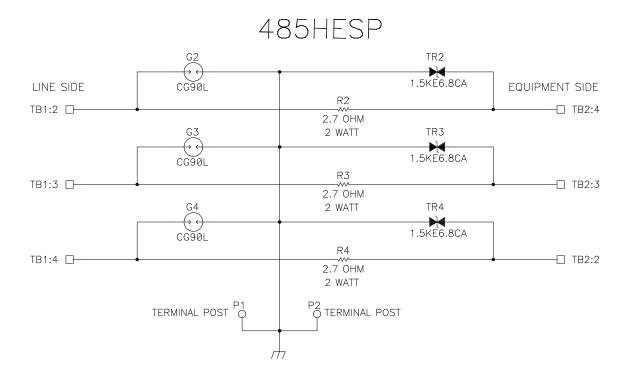



# AMEYA360 Components Supply Platform

## **Authorized Distribution Brand:**

























### Website:

Welcome to visit www.ameya360.com

#### Contact Us:

#### Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

#### > Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

#### Customer Service :

Email service@ameya360.com

# Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com