
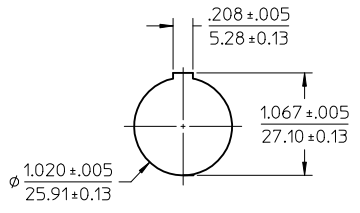
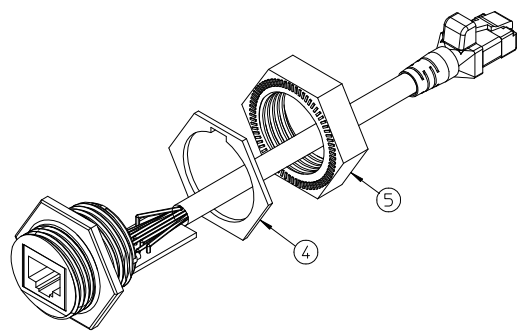
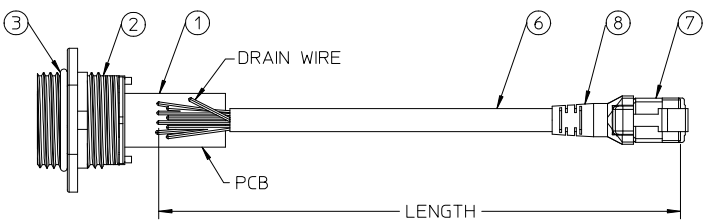


13	12	11	10	9	8	7	6	5	4	3	2	1
MATERIAL NO	ENGINEERING NO.	LENGTH	TOLERANCE									
1300550002	ENSP1F5C305	30.5 CM (1.0 FT)	+1.9 -0 CM(+.75"-0)									
1300550004	ENSP1F5M006	0.6 M (1.97 FT)	+4.4 -0 CM(+1.75"-0)									
1300550005	ENSP1F5M010	1.0 M (3.28 FT)	+5.6 -0 CM(+2.19"-0)									
1300550003	ENSP1F5C305-V	30.5 CM (1.0 FT)	+1.9 -0 CM(+.75"-0)									
1300550006	ENSP1F5M010-V	1.0 M (3.28 FT)	+5.6 -0 CM(+2.19"-0)									



- WIRE LIST
PIN (SAME FOR BOTH CONNECTORS)
- 1 WHT/BLU
 - 2 BLUE
 - 3 WHT/ORG
 - 4 GREEN
 - 5 WHT/GRN
 - 6 ORG
 - 7 WHT/BRN
 - 8 BRN
 - 9 GND

WIRING DIAGRAM
TOP VIEW OF PCB



PANEL CUT OUT
PANEL THK: .125 MAX. W/GASKET
.187 MAX. W/OUT GASKET
.062 MIN.

- NOTES:
- 1) MATERIAL: SEE TABLE
 - 2) FINISHES: SEE TABLE
 - 3) LABEL IS MARKED WITH P/N, BAR CODE, DESCRIPTION
 - 4) ELECTRICAL DATA:
WIRING TO PCB: 8 THRU HOLES, PLUS SHIELD
MAX. VOLTAGE: 125V DC
MAX. CURRENT 1.5A
PROTECTION IP67
TEMPERATURE RANGE: -20°C TO 80°C
CSA & UL
 - 5) PACKAGING:
ASSEMBLIES ARE BAGGED SEPERATELY
IN POLY BAGS WITH BAR CODE LABEL ATTACHED
TO OUTSIDE OF BAG.
 - 6) ASSEMBLY IS RoHS COMPLIANT.

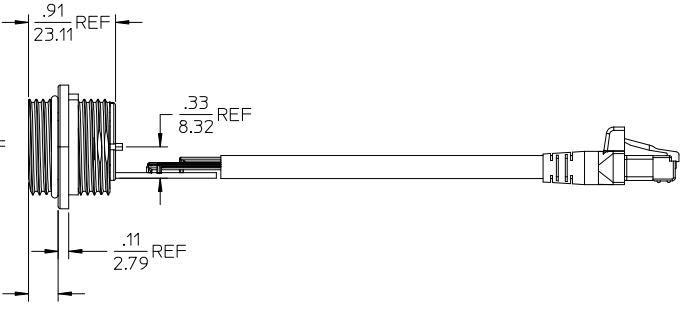

ITEM 4 & 5 REMOVED FOR CLARITY

8	1	BOOT HOOD	POLYOLEFIN	BLACK
7	1	RJ45 PLUG 8 POS	---	---
6	1	CABLE 4T/P 26AWG 5e	PVC	BLACK
5	1	HEX NUT	LNP	BLACK
4	1	BULKHEAD GASKET	NITRILE	BLACK
3	1	O RING	VITON	BROWN
2	1	HOUSING	ABS	BLACK
1	1	RJ45 W/PCB SUB ASSY.	---	---
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

MODIFIED CUTOUT
EC NO: WNA2012-0069
2011/07/28
DRWNK:J02WIK
2011/07/28
CHKD:WOODMAN
2011/08/13
APPR:JMURPHY

DESCRIPTION
REV

QUALITY SYMBOLS
=0
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± ---
1 PLACE ± --- ± ---
ANGULAR ± 1/2°
DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM
DRAWN BY DATE
BRUPERT 04/16/09
CHECKED BY DATE
BWOODMAN 04/16/09
APPROVED BY DATE
JMURPHY 04/16/09

SCALE
1:1
DESIGN UNITS
INCH
THIRD ANGLE PROJECTION

TITLE
ENET FR/MP PASS
10T SHD

MATERIAL NO.
DOCUMENT NO.
SD-130055-002
SHEET NO.
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com