

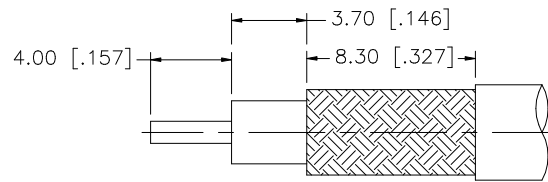
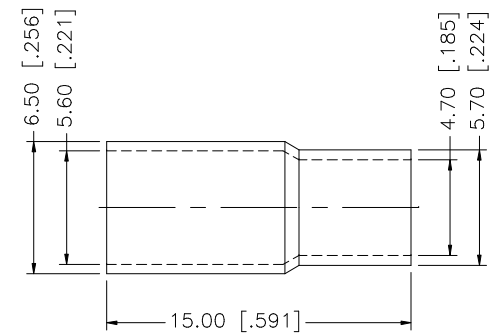


REV.	DATE	DESCRIPTION
NC	02/18/03	INITIAL RELEASE

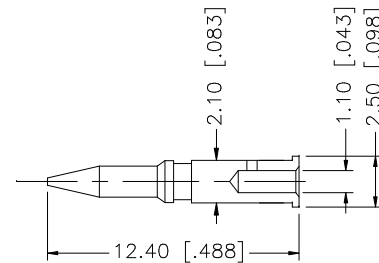

RECOMMENDED
CABLE STRIPPING DIM'S

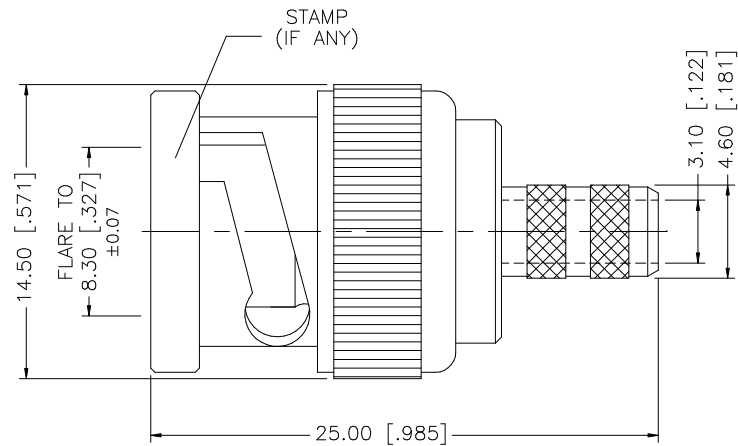

9					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE	Amphenol Connex PART DESCRIPTION BNC CRIMP PLUG (RG-58/U PLENUM CABLE)								
8						DRAWN	G.R.S.	01/06/03					PART NO.	112128			
7						CHECKED											
6						ISSUED											
5																	
4	FERRULE	BRASS	NICKEL	1													
3	CONTACT PIN	BRASS	GOLD	1													
2	INSULATOR	DELRI	NATURAL	1													
1	BODY	BRASS	NICKEL	1													
DESCRIPTION MATERIAL FINISH QTY					CAD FILE	C:/112/112128.DWG			DWG. NO.	112128.DWG		REV.	C	SIZE	A	SCALE	NA

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com