



High Power Diode Modules

$I_{FRMS} = 2 \times 450 \text{ A}$
 $I_{FAVM} = 2 \times 270 \text{ A}$
 $V_{RRM} = 1200\text{-}2200 \text{ V}$

| V_{RSM} V_{DSM} V | V_{RRM} V_{DRM} V | Type |
|-----------------------------|-----------------------------|--------------|
| 1300 | 1200 | MDD 255-12N1 |
| 1500 | 1400 | MDD 255-14N1 |
| 1700 | 1600 | MDD 255-16N1 |
| 1900 | 1800 | MDD 255-18N1 |
| 2100 | 2000 | MDD 255-20N1 |
| 2300 | 2200 | MDD 255-22N1 |



| Symbol | Conditions | Maximum Ratings | |
|---------------|---|--------------------|--------------------------|
| I_{FRMS} | $T_{VJ} = T_{VJM}$ | 450 | A |
| I_{FAVM} | $T_C = 100^\circ\text{C}; 180^\circ \text{ sine}$ | 270 | A |
| I_{FSM} | $T_{VJ} = 45^\circ\text{C}; V_R = 0$ | t = 10 ms (50 Hz) | 9500 A |
| | | t = 8.3 ms (60 Hz) | 10200 A |
| | $T_{VJ} = T_{VJM}; V_R = 0$ | t = 10 ms (50 Hz) | 8400 A |
| | | t = 8.3 ms (60 Hz) | 9000 A |
| $\int i^2 dt$ | $T_{VJ} = 45^\circ\text{C}; V_R = 0$ | t = 10 ms (50 Hz) | 451 000 A ² s |
| | | t = 8.3 ms (60 Hz) | 437 000 A ² s |
| | $T_{VJ} = T_{VJM}; V_R = 0$ | t = 10 ms (50 Hz) | 353 000 A ² s |
| | | t = 8.3 ms (60 Hz) | 340 000 A ² s |
| T_{VJ} | | -40...+150 | °C |
| T_{VJM} | | 150 | °C |
| T_{stg} | | -40...+125 | °C |
| V_{ISOL} | 50/60 Hz, RMS | t = 1 min | 3000 V~ |
| | $I_{ISOL} \leq 1 \text{ mA}$ | t = 1 s | 3600 V~ |
| M_d | Mounting torque (M6) | 4.5-7/40-62 | Nm/lb.in. |
| | Terminal connection torque (M8) | 11-13/97-115 | Nm/lb.in. |
| Weight | Typical including screws | 750 | g |

Features

- International standard package
- Direct copper bonded Al₂O₃-ceramic with copper base plate
- Planar passivated chips
- Isolation voltage 3600 V~
- UL registered E 72873

Applications

- Supplies for DC power equipment
- DC supply for PWM inverter
- Field supply for DC motors
- Battery DC power supplies


Advantages

- Simple mounting
- Improved temperature and power cycling
- Reduced protection circuits








| Symbol | Conditions | Characteristic Values | | |
|------------|--|-------------------------------|------------------|-----|
| I_{RRM} | $T_{VJ} = T_{VJM}; V_R = V_{RRM}$ | 30 | mA | |
| V_F | $I_F = 600 \text{ A}; T_{VJ} = 25^\circ\text{C}$ | 1.4 | V | |
| V_{T0} | For power-loss calculations only | 0.8 | V | |
| r_T | $T_{VJ} = T_{VJM}$ | 0.6 | mΩ | |
| R_{thJC} | per diode; DC current per module | } other values see MCC 255 | 0.140 | K/W |
| | | | 0.07 | K/W |
| R_{thJK} | per diode; DC current per module | } | 0.18 | K/W |
| | | | 0.09 | K/W |
| Q_S | $T_{VJ} = 125^\circ\text{C}; I_F = 400 \text{ A}; -di/dt = 50 \text{ A}/\mu\text{s}$ | 700 | μC | |
| I_{RM} | | 260 | A | |
| d_S | Creeping distance on surface | 12.7 | mm | |
| d_A | Creepage distance in air | 9.6 | mm | |
| a | Maximum allowable acceleration | 50 | m/s ² | |

Data according to IEC 60747 and refer to a single diode unless otherwise stated.

Dimensions in mm (1 mm = 0.0394")

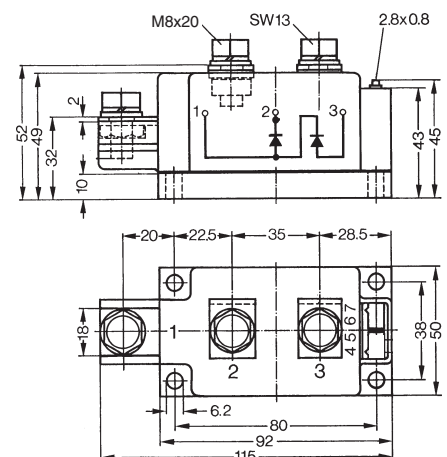

IXYS reserves the right to change limits, test conditions and dimensions.

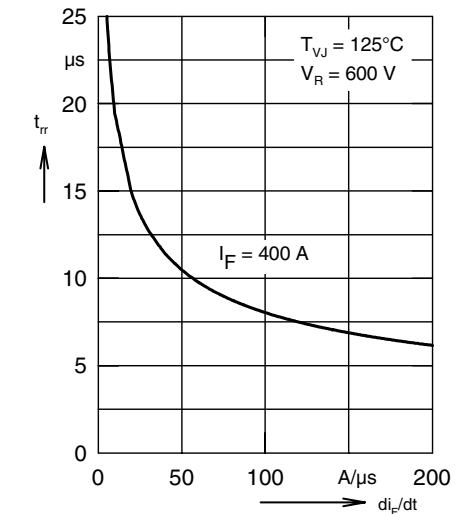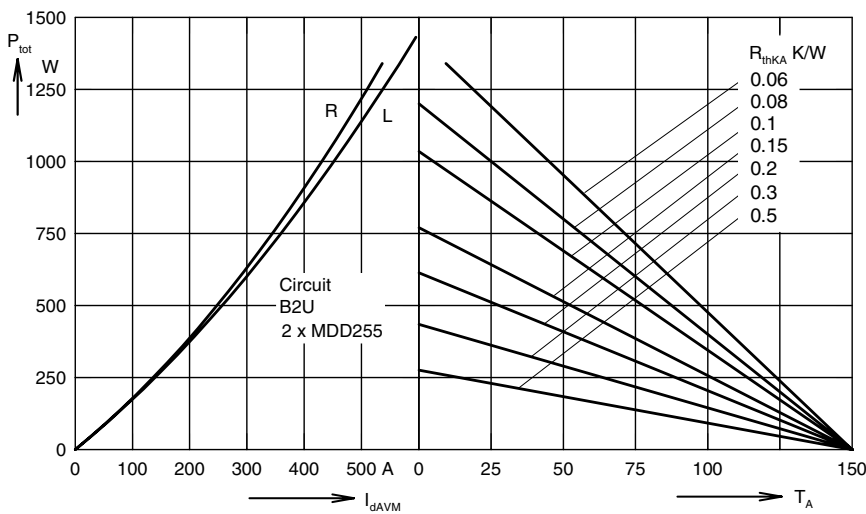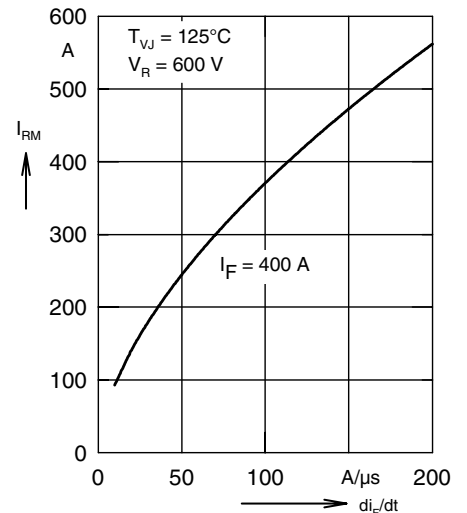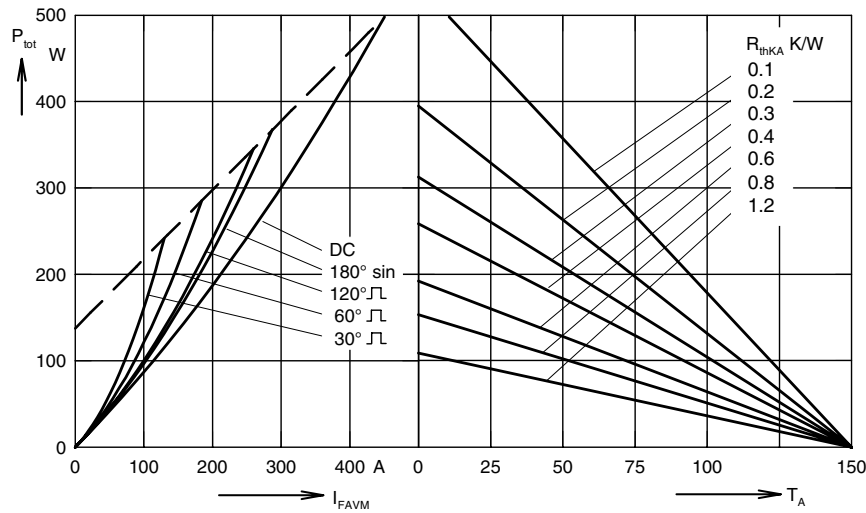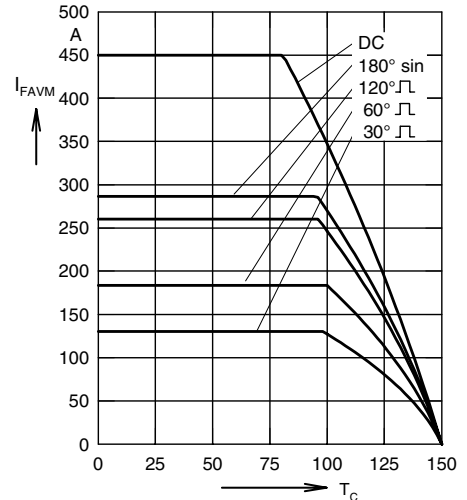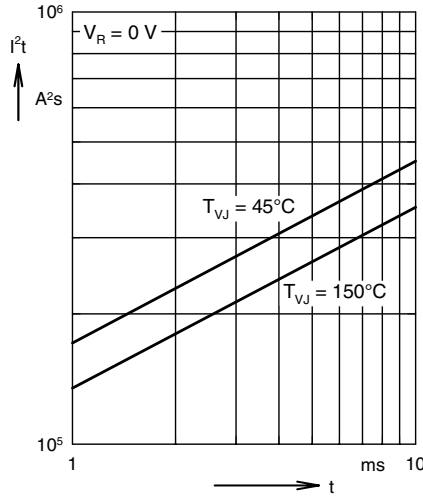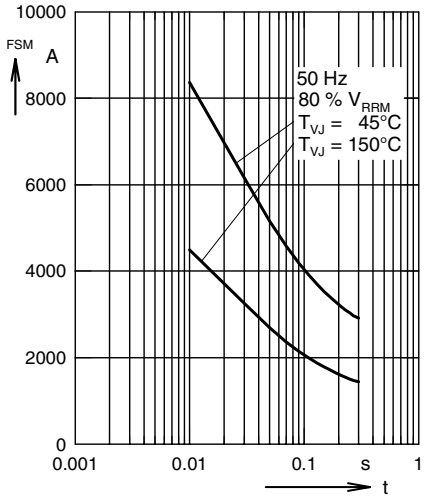

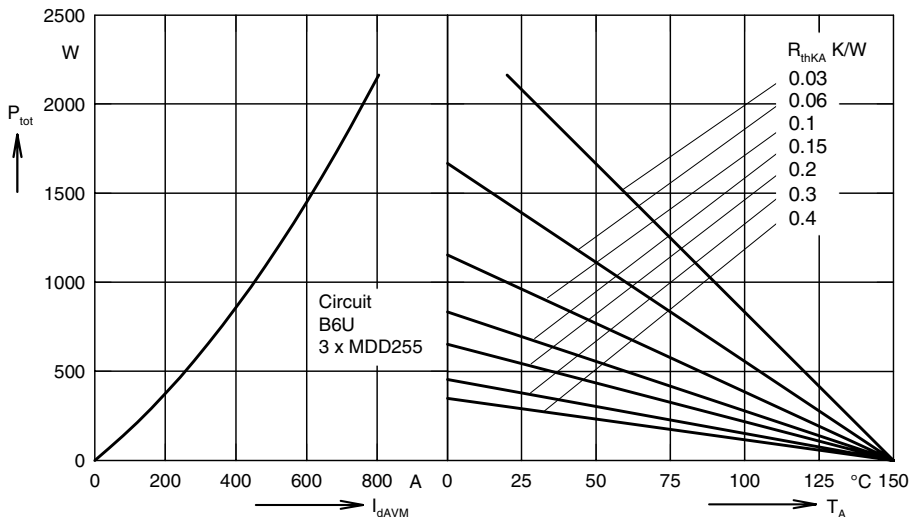


Fig. 8 Three phase rectifier bridge: Power dissipation vs. direct output current and ambient temperature

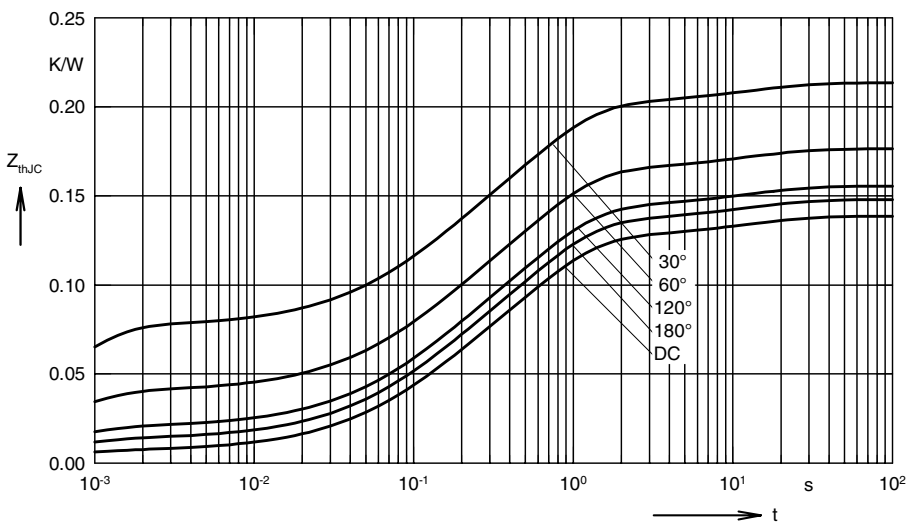


Fig. 9 Transient thermal impedance junction to case (per diode)

R_{thJC} for various conduction angles d:

| d | R_{thJC} (K/W) |
|------|------------------|
| DC | 0.139 |
| 180° | 0.148 |
| 120° | 0.156 |
| 60° | 0.176 |
| 30° | 0.214 |

Constants for Z_{thJC} calculation:

| i | R_{thi} (K/W) | t_i (s) |
|---|-----------------|-----------|
| 1 | 0.0066 | 0.00054 |
| 2 | 0.0358 | 0.098 |
| 3 | 0.0831 | 0.54 |
| 4 | 0.0129 | 12 |

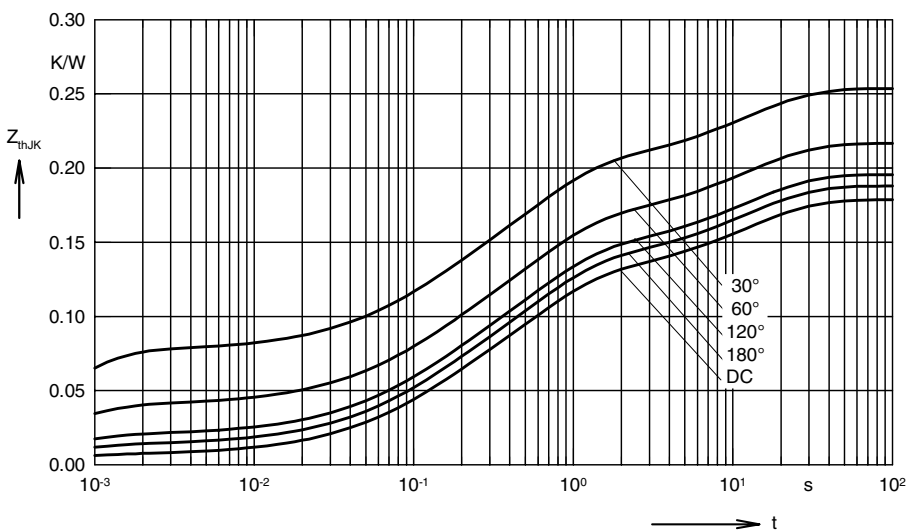


Fig. 10 Transient thermal impedance junction to heatsink (per diode)

R_{thJK} for various conduction angles d:

| d | R_{thJK} (K/W) |
|------|------------------|
| DC | 0.179 |
| 180° | 0.188 |
| 120° | 0.196 |
| 60° | 0.216 |
| 30° | 0.254 |

Constants for Z_{thJK} calculation:

| i | R_{thi} (K/W) | t_i (s) |
|---|-----------------|-----------|
| 1 | 0.0066 | 0.00054 |
| 2 | 0.0358 | 0.098 |
| 3 | 0.0831 | 0.54 |
| 4 | 0.0129 | 12 |
| 5 | 0.04 | 12 |

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com