



Hall Effect Current Sensor S29S1T0D24ZM

Features:

- Closed Loop type
- Current or voltage output
- Conversion ratio K = 1:5000
- Panel mounting with Molex 6410-03C.
- Large aperture
- Insulated plastic case according to UL94V0

Advantages:

- Excellent accuracy and linearity
- Very low temperature drift
- No insertion loss
- High Immunity to external interferences
- Optimised response time
- Wide supply voltage range

Specifications


$T_A=25^{\circ}\text{C}$, $V_{CC}=\pm 24\text{V}$

Parameters	Symbol	S29S1T0D24ZM	
Rated Current	I_f	1000A	
Maximum Current	I_{fmax}	$\pm 2100\text{A}$ (see below)	
$I_f = \pm A_{DC}$ Measuring resistance @ 85°C	R_M	$\pm 15\text{V}$	70°C 1000A : $0\Omega \sim 21\Omega$ 1200A : $0\Omega \sim 9\Omega$ 1300A : $0\Omega \sim 5\Omega$
			85°C 1000A : $0\Omega \sim 18\Omega$ 1200A : $0\Omega \sim 7\Omega$
		$\pm 24\text{V}$	70°C 1000A : $0\Omega \sim 60.5\Omega$ 1800A : $0\Omega \sim 14\Omega$ 2100A : $0\Omega \sim 4\Omega$
			85°C 1000A : $10\Omega \sim 58.5\Omega$ 1800A : $10\Omega \sim 12\Omega$
Conversion Ratio	K	1 : 5000	
Output Current	I_{OUT}	$\pm 200\text{mA}$	
Offset Current	I_{OE}	$\leq \pm 0.4\text{mA}$ @ $I_f = 0\text{A}^1$	
Output Current Accuracy	X	$I_{OUT} \pm 0.4\%$ (without I_{of})	
Output Linearity	ϵ_L	$\leq \pm 0.1\%$ @ I_f	
Supply Voltage	V_{CC}	$\pm 15\text{V} \sim \pm 24\text{V}$ ($\pm 5\%$)	
Consumption Current	I_{CC}	$\pm 35\text{mA}$ (Output Current is not included)	
Response Time ²	t_r	$< 1.0\mu\text{s}$ @ $di/dt = 100\text{A} / \mu\text{s}$	
Output Temperature Characteristic	TCI_{OUT}	$< \pm 0.01\%$ / $^{\circ}\text{C}$ @ I_f (without TCI_{OE})	
Offset Temperature Characteristic	TCI_{OE}	$\leq \pm 0.8\text{mA}$ max @ $I_f = 0\text{A}$	
Hysteresis allowance	I_{OH}	$\leq 0.2\text{mA}$ ($0\text{A} \leftrightarrow 3 \times I_f$)	
Insulation Withstanding	V_d	AC 4000V, for 1minute (sensing current 0.5mA), inside of aperture $\leftrightarrow$ terminals	
Insulation Resistance	R_{IS}	$> 500\text{M}\Omega$ (@ DC 500V) inside of aperture $\leftrightarrow$ terminals	
Frequency Bandwidth	f	DC .. 100 kHz	
Secondary Coil Resistance	R_s	48 Ω @ $T_A = 70^{\circ}\text{C}$ 50 Ω @ $T_A = 85^{\circ}\text{C}$	
Operating Temperature	T_A	$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$	
Storage Temperature	T_s	$-40^{\circ}\text{C} \sim +90^{\circ}\text{C}$	


¹ Offset current value is after removal of core hysteresis — ² Time between 90% input current full scale and 90% of sensor output full scale

Electrical Performances

Frequency Characteristics

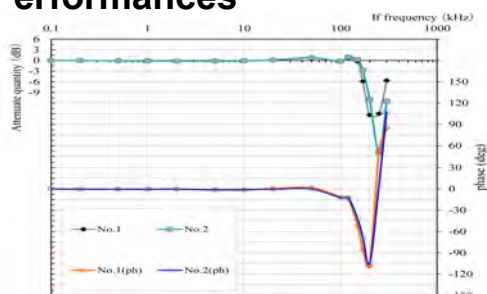


Saturation Characteristics

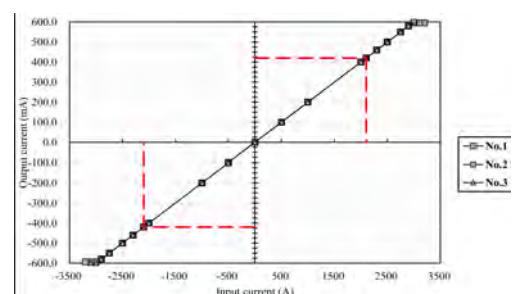

Hall Effect Current Sensor S29S1T0D24ZM

Mechanical dimensions in mm

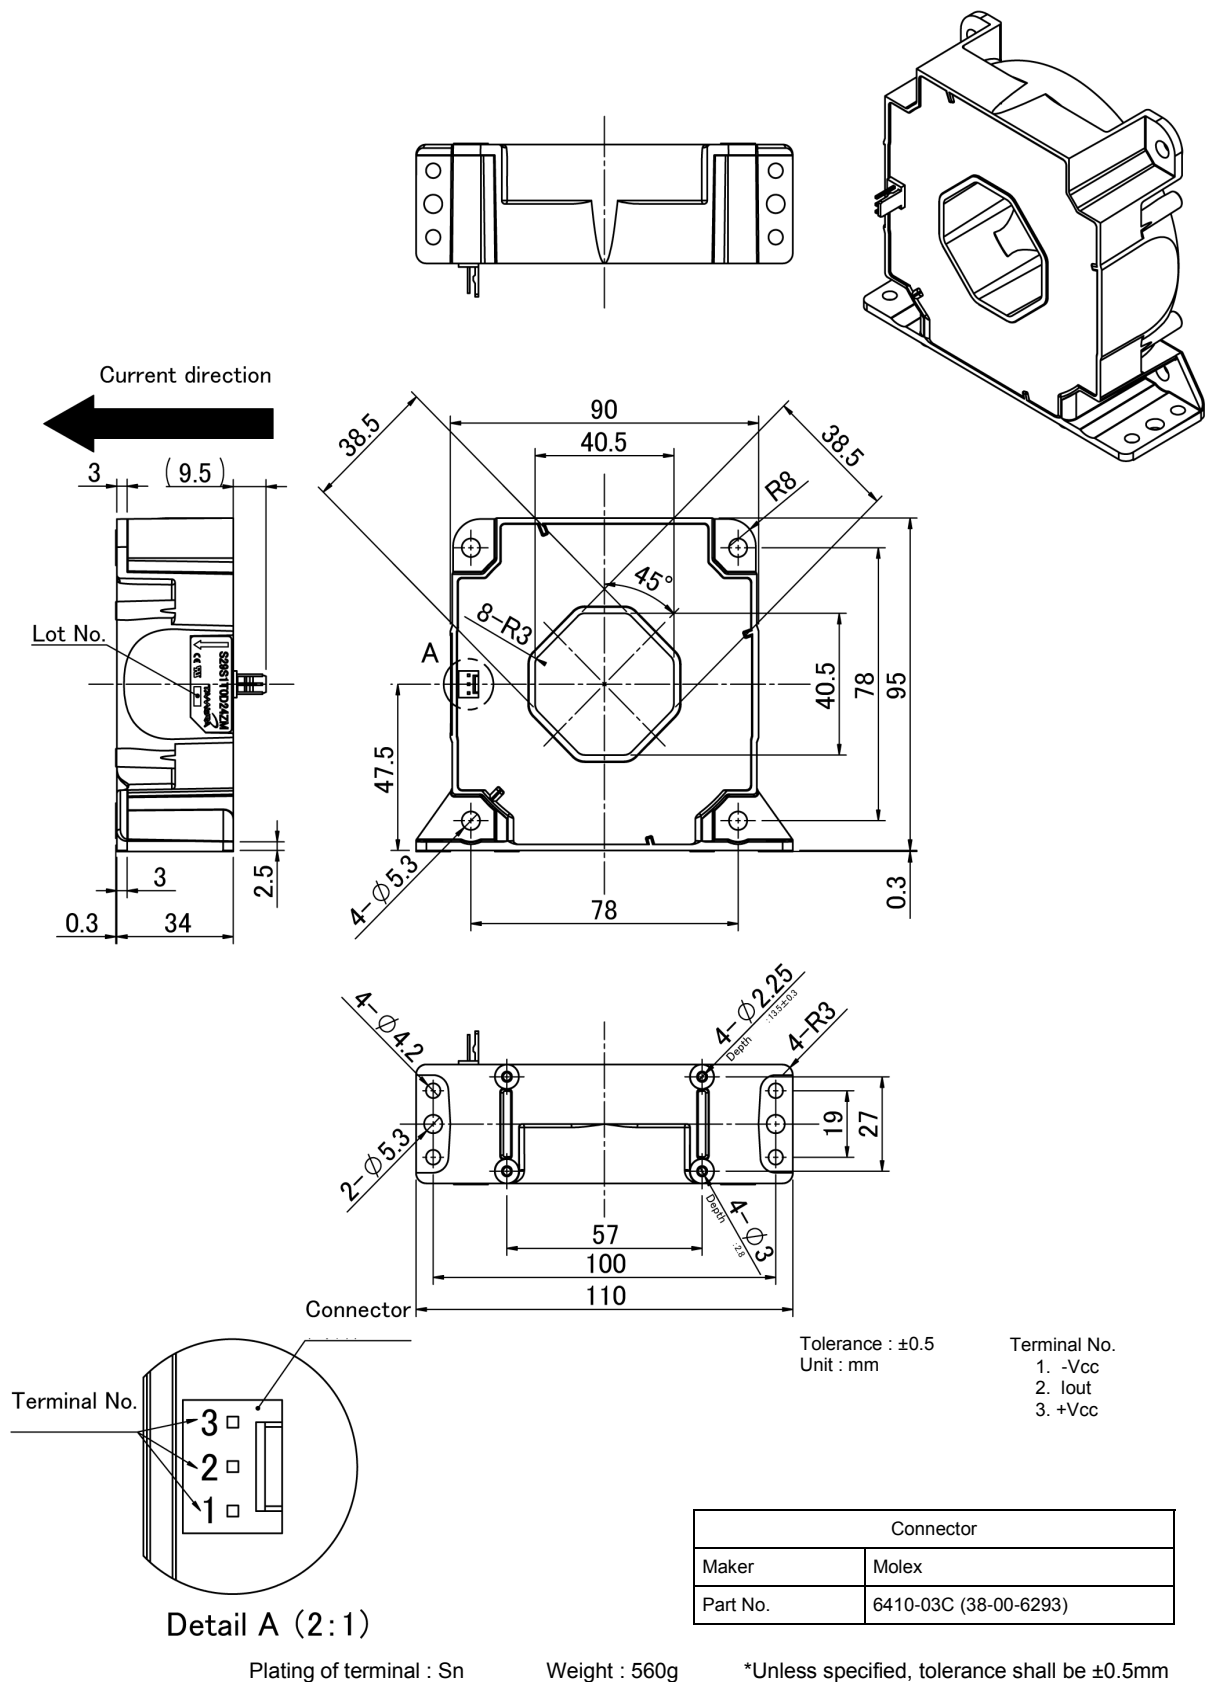

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com