


Multilayer Chip Directional Couplers

For LTE/GSM/DCS/PCS


Conformity to RoHS Directive

HHM Series HHM2909C4

SHAPES AND DIMENSIONS

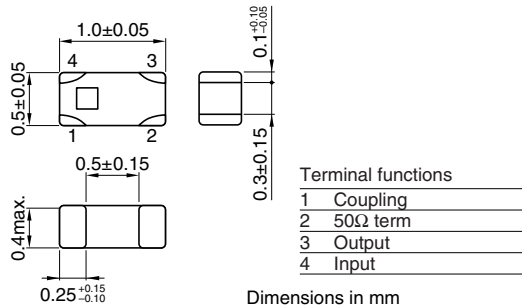

RECOMMENDED PC BOARD PATTERNS

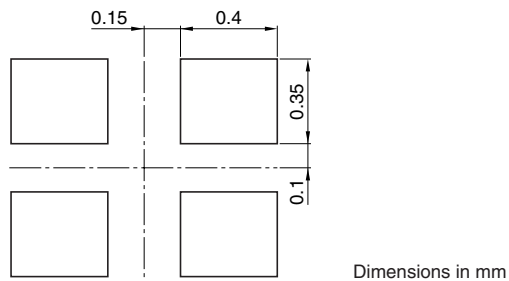

ELECTRICAL CHARACTERISTICS

Frequency range		777 to 787MHz	824 to 925MHz	1710 to 1785MHz	1850 to 1910MHz
Coupling factor		20.4±1.0dB	19.4±1.0dB	13.5±1.0dB	12.8±1.0dB
Insertion loss		0.25dB max.*1	0.25dB max.*1	0.50dB max.*1	0.55dB max.*1
		0.28dB max.*2	0.28dB max.*2	0.55dB max.*2	0.60dB max.*2
Isolation		32dB min.	32dB min.	32dB min.	32dB min.
VSWR		1.4max.	1.4max.	1.4max.	1.4max.
Temperature range	Operating	-40 to +85°C	-40 to +85°C	-40 to +85°C	-40 to +85°C
	Storage	-40 to +85°C	-40 to +85°C	-40 to +85°C	-40 to +85°C

*1 25°C


*2 Operating temperature

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

FREQUENCY CHARACTERISTICS


COUPLING

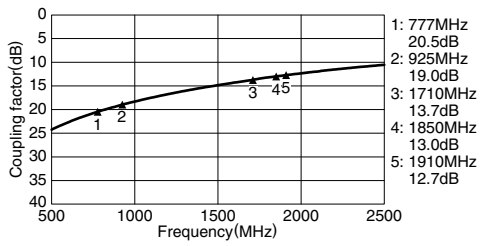


ISOLATION & DIRECTIVITY

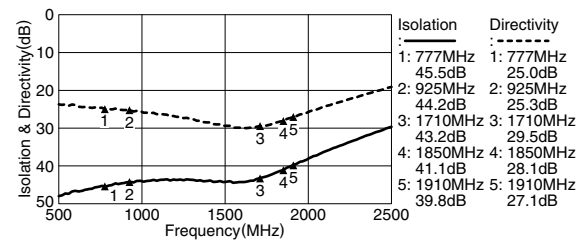

INSERTION LOSS

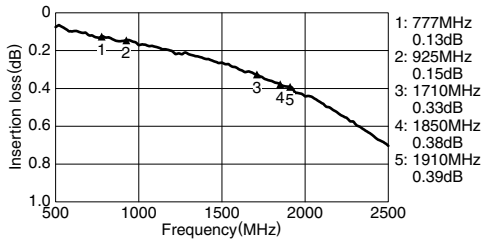

VSWR

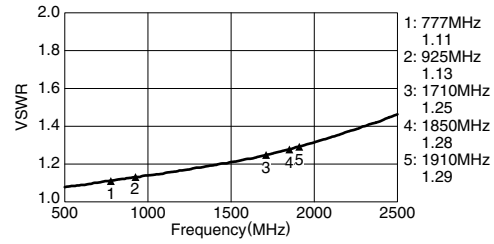

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com