


High Voltage BIMOSFET™


Monolithic Bipolar MOS Transistor

IXBP 5N160 G
IXBH 5N160 G


$I_{C25} = 5.7 \text{ A}$
 $V_{CES} = 1600 \text{ V}$
 $V_{CE(sat)} = 4.9 \text{ V}$
 $t_f = 70 \text{ ns}$



TO-220 AB

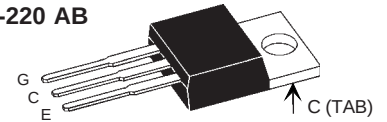

TO-247 AD

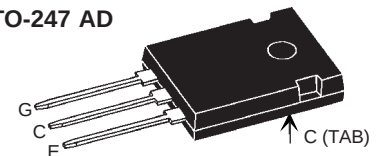

A = Anode, C = Cathode, TAB = Cathode

IGBT			
Symbol	Conditions	Maximum Ratings	
V_{CES}	$T_{VJ} = 25^{\circ}\text{C}$ to 150°C	1600	V
V_{GES}		± 20	V
I_{C25}	$T_C = 25^{\circ}\text{C}$	5.7	A
I_{C90}	$T_C = 90^{\circ}\text{C}$	3.5	A
I_{CM} V_{CEK}	$V_{GE} = 10/0 \text{ V}$; $R_G = 47 \Omega$; $T_{VJ} = 125^{\circ}\text{C}$ RBSOA, Clamped inductive load; $L = 100 \mu\text{H}$	6 $0.8V_{CES}$	A
P_{tot}	$T_C = 25^{\circ}\text{C}$	68	W

Features

- High Voltage BIMOSFET™
 - substitute for high voltage MOSFETs with significantly lower voltage drop
 - MOSFET compatible control 10 V turn on gate voltage
- fast switching for high frequency operation
- reverse conduction capability
- industry standard package
 - TO-220AB
 - TO-247AD
- epoxy meets UL94V-0

Applications

- switched mode power supplies
- DC-DC converters
- resonant converters
- lamp ballasts
- laser generators, x ray generators

Symbol	Conditions	Characteristic Values ($T_{VJ} = 25^{\circ}\text{C}$, unless otherwise specified)		
		min.	typ.	max.
$V_{CE(sat)}$	$I_C = 3 \text{ A}$; $V_{GE} = 15 \text{ V}$; $T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$		4.9 5.6	7.2 V
$V_{GE(th)}$	$I_C = 0.3 \text{ mA}$; $V_{GE} = V_{CE}$	3.5		5.5 V
I_{CES}	$V_{GE} = 0 \text{ V}$; $V_{CE} = V_{CES}$; $T_{VJ} = 25^{\circ}\text{C}$ $V_{CE} = 0.8V_{CES}$; $T_{VJ} = 125^{\circ}\text{C}$		0.05	0.15 mA
I_{GES}	$V_{CE} = 0 \text{ V}$; $V_{GE} = \pm 20 \text{ V}$			500 nA
$t_{d(on)}$ t_r $t_{d(off)}$ t_f	Inductive load, $T_{VJ} = 125^{\circ}\text{C}$ $V_{CE} = 960 \text{ V}$; $I_C = 3 \text{ A}$ $V_{GE} = 10/0 \text{ V}$; $R_G = 47 \Omega$		140 200 120 70	ns ns ns ns
C_{ies} Q_{Gon}	$V_{CE} = 25 \text{ V}$; $V_{GE} = 0 \text{ V}$; $f = 1 \text{ MHz}$ $V_{CE} = 600 \text{ V}$; $V_{GE} = 10 \text{ V}$; $I_C = 3 \text{ A}$		325 26	pF nC
V_F	(reverse conduction); $I_F = 3 \text{ A}$		6	V
R_{thJC}				1.85 K/W

IXYS reserves the right to change limits, test conditions and dimensions.

© 2003 IXYS All rights reserved


IXYS Semiconductor GmbH
Edisonstr. 15, D-68623 Lampertheim
Phone: +49-6206-503-0, Fax: +49-6206-503627

IXYS Corporation
3540 Bassett Street, Santa Clara CA 95054
Phone: (408) 982-0700, Fax: 408-496-0670


Component

Symbol	Conditions	Maximum Ratings		
T_{VJ}		-55...+150	°C	
T_{stg}		-55...+125	°C	
M_D	mounting torque	(TO-220)	0.6	Nm
		(TO-247)	1.2	Nm

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
R_{thCH}	with heatsink compound		0.25	K/W
Weight	(TO-220)		2	g
	(TO-247)		6	g

Dimensions
TO-220 AB


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	12.70	13.97	0.500	0.550
B	14.73	16.00	0.580	0.630
C	9.91	10.66	0.390	0.420
D	3.54	4.08	0.139	0.161
E	5.85	6.85	0.230	0.270
F	2.54	3.18	0.100	0.125
G	1.15	1.65	0.045	0.065
H	2.79	5.84	0.110	0.230
J	0.64	1.01	0.025	0.040
K	2.54	BSC	0.100	BSC
M	4.32	4.82	0.170	0.190
N	1.14	1.39	0.045	0.055
Q	0.35	0.56	0.014	0.022
R	2.29	2.79	0.090	0.110

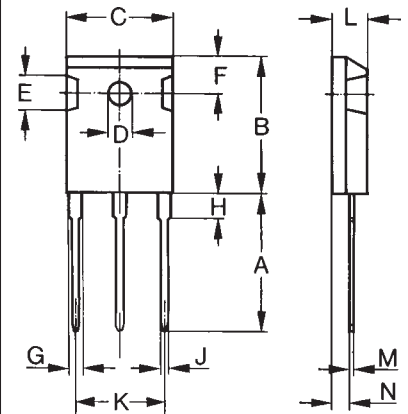TO-247 AD


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	19.81	20.32	0.780	0.800
B	20.80	21.46	0.819	0.845
C	15.75	16.26	0.610	0.640
D*	3.55	3.65	0.140	0.144
E	4.32	5.49	0.170	0.216
F	5.4	6.2	0.212	0.244
G	1.65	2.13	0.065	0.084
H	-	4.5	-	0.177
J	1.0	1.4	0.040	0.055
K	10.8	11.0	0.426	0.433
L	4.7	5.3	0.185	0.209
M	0.4	0.8	0.016	0.031
N	1.5	2.49	0.087	0.102

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com