



Three phase full Bridge with Trench MOSFETs in DCB isolated high current package

$$V_{DSS} = 40 \text{ V}$$

$$I_{D25} = 180 \text{ A}$$

$$R_{DSon \text{ typ.}} = 1.9 \text{ m}\Omega$$

Preliminary data

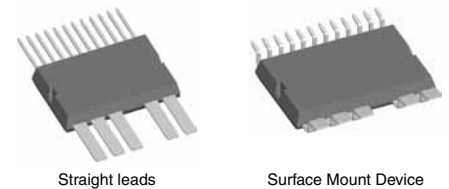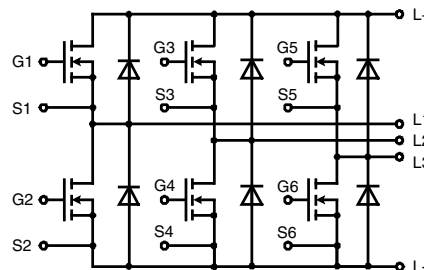

MOSFETs					
Symbol	Conditions	Maximum Ratings			
V_{DSS}	$T_J = 25^{\circ}\text{C}$ to 150°C			40	V
V_{GS}				± 20	V
I_{D25}	$T_C = 25^{\circ}\text{C}$			180	A
I_{D90}	$T_C = 90^{\circ}\text{C}$			136	A
I_{D110}	$T_C = 110^{\circ}\text{C}$			120	A
I_{F25}	$T_C = 25^{\circ}\text{C}$ (diode)			182	A
I_{F90}	$T_C = 90^{\circ}\text{C}$ (diode)			112	A
I_{F110}	$T_C = 110^{\circ}\text{C}$ (diode)			88	A
Symbol	Conditions	Characteristic Values			
$(T_J = 25^{\circ}\text{C}$, unless otherwise specified)					
		min.	typ.	max.	
$R_{DSon}^{1)}$	on chip level at $V_{GS} = 10\text{ V}$; $I_D = 100\text{ A}$		1.9	2.5	m Ω
	$T_J = 25^{\circ}\text{C}$ $T_J = 125^{\circ}\text{C}$		2.8		m Ω
$V_{GS(th)}$	$V_{DS} = 20\text{ V}$; $I_D = 1\text{ mA}$	2.5		4.5	V
I_{DSS}	$V_{DS} = V_{DSS}$; $V_{GS} = 0\text{ V}$			5	μA
	$T_J = 25^{\circ}\text{C}$ $T_J = 125^{\circ}\text{C}$		50		μA
I_{GSS}	$V_{GS} = \pm 20\text{ V}$; $V_{DS} = 0\text{ V}$			0.2	μA
Q_g	$V_{GS} = 10\text{ V}$; $V_{DS} = 20\text{ V}$; $I_D = 100\text{ A}$		110		nC
Q_{gs}			33		nC
Q_{gd}			30		nC
$t_{d(on)}$	inductive load $V_{GS} = +10/0\text{ V}$; $V_{DS} = 24\text{ V}$ $I_D = 135\text{ A}$; $R_G = 39\text{ }\Omega$; $T_J = 125^{\circ}\text{C}$		150		ns
t_r			240		ns
$t_{d(off)}$			350		ns
t_f			170		ns
E_{on}			0.12		mJ
E_{off}			0.51		mJ
E_{recoff}			0.003		mJ
R_{thJC}	with heat transfer paste (IXYS test setup)			1.0	K/W
R_{thJH}			1.3	1.6	K/W

¹⁾ $V_{DS} = I_D \cdot (R_{DS(on)} + R_{Pin \text{ to Chip}})$

Applications

- AC drives
 - in automobiles
 - electric power steering
 - starter generator
 - in industrial vehicles
 - propulsion drives
 - fork lift drives
- in battery supplied equipment

Features

- MOSFETs in trench technology:
 - low R_{DSon}
 - optimized intrinsic reverse diode
- package:
 - high level of integration
 - high current capability 300 A max.
 - aux. terminals for MOSFET control
 - terminals for soldering or welding connections
 - isolated DCB ceramic base plate with optimized heat transfer
- Space and weight savings

Package options

- 2 lead forms available
 - straight leads (SL)
 - SMD lead version (SMD)

Recommended replacement for the SMD type: MTI150W40GC

Source-Drain Diode

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
V_{SD}	(diode) $I_F = 100\text{ A}$; $V_{GS} = 0\text{ V}$		0.9	1.2
t_{rr}	$I_F = 100\text{ A}$; $-di_F/dt = 600\text{ A}/\mu\text{s}$ $V_R = 15\text{ V}$; $T_{VJ} = 125^\circ\text{C}$		38	ns
Q_{RM}			0.31	μC
I_{RM}			14	A


Component

Symbol	Conditions	Maximum Ratings	
I_{RMS}	per pin in main current paths (P+, N-, L1, L2, L3) may be additionally limited by external connections	300	A
T_J		-55...+175	$^\circ\text{C}$
T_{stg}		-55...+125	$^\circ\text{C}$
V_{ISOL}	$I_{ISOL} \leq 1\text{ mA}$, 50/60 Hz, $f = 1\text{ minute}$	1000	V~
F_C	mounting force with clip	50 - 250	N


Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$R_{pin\text{ to chip}}^{1)}$	L+ to L1/L2/L3 or L- to L1/L2/L3		1.0	m Ω
C_P	coupling capacity between shorted pins and mounting tab in the case		160	pF
Weight			25	g

¹⁾ $V_{DS} = I_D \cdot (R_{DS(on)} + R_{Pin\text{ to Chip}})$

Straight Leads GWM 180-004X2-SL

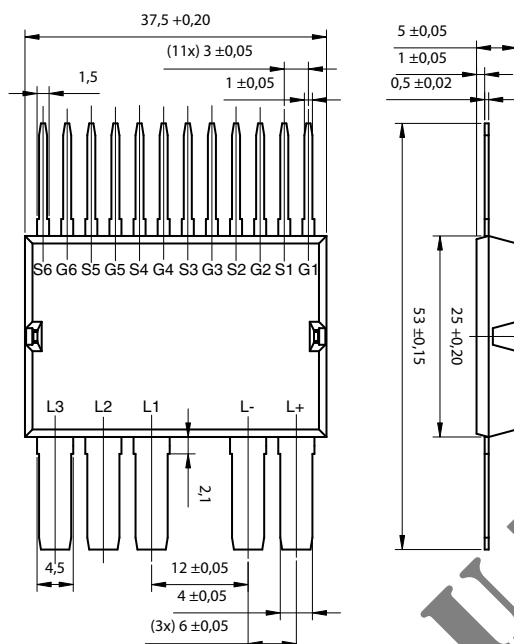

Surface Mount Device GWM 180-004X2-SMD

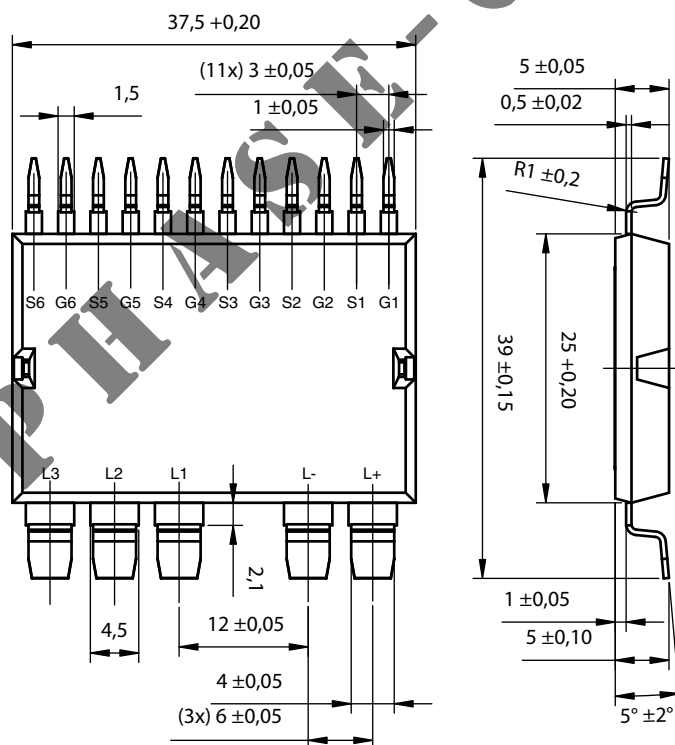

Leads	Ordering	Part Name & Packing Unit Marking	Part Marking	Delivering Mode	Base Qty.	Ordering Code
Straight	Standard	GWM 180-004X2 - SL	GWM 180-004X2	Blister	28	508 772
SMD	Standard	GWM 180-004X2 - SMD	GWM 180-004X2	Blister	28	508 786

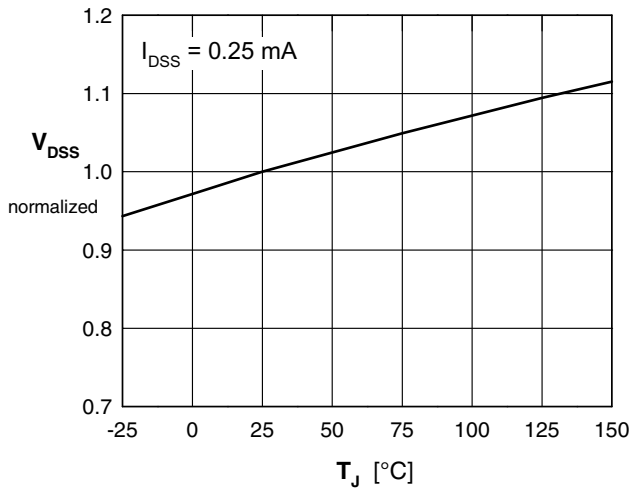


Fig. 1 Drain source breakdown voltage V_{DS} versus junction temperature T_{VJ}

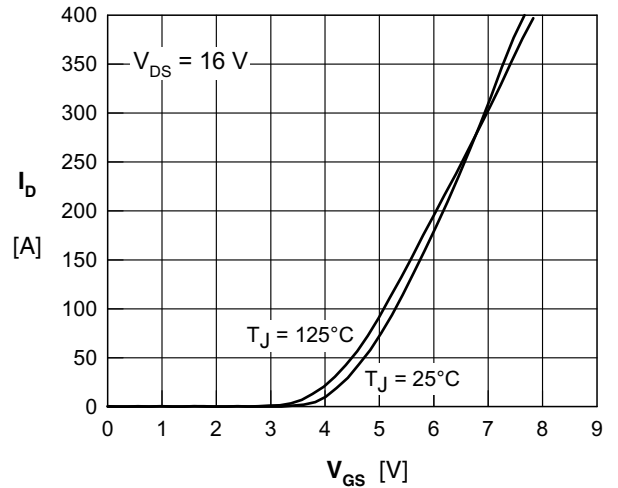


Fig. 2 Typical transfer characteristic

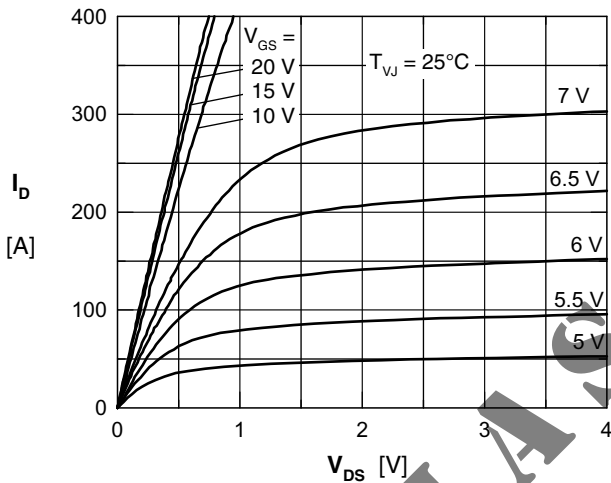


Fig. 3 Typical output characteristic

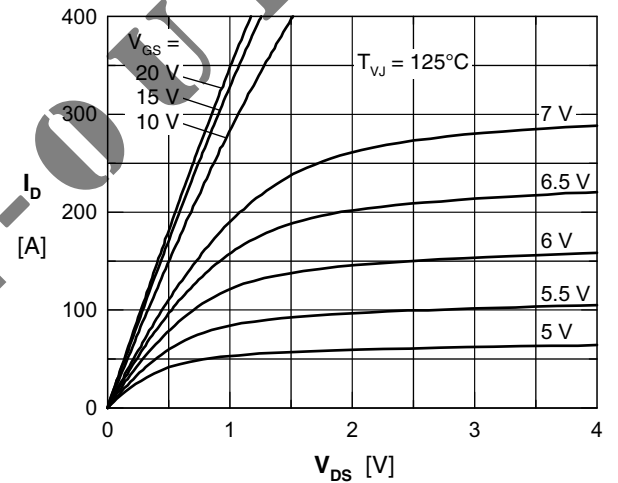


Fig. 4 Typical output characteristic

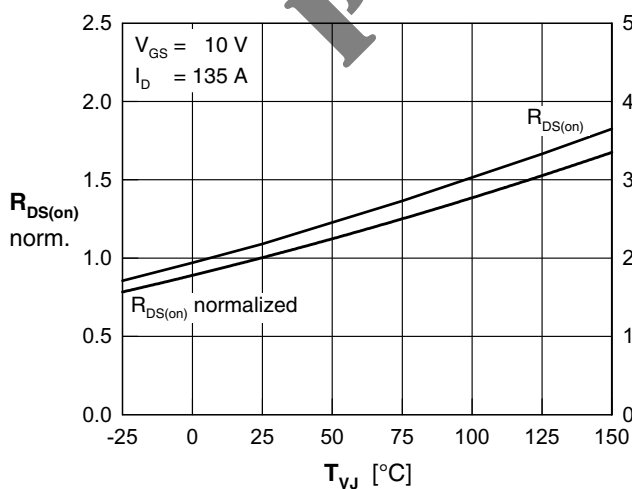


Fig. 5 Typ. drain source on-state resistance $R_{DS(on)}$ versus junction temperature T_J

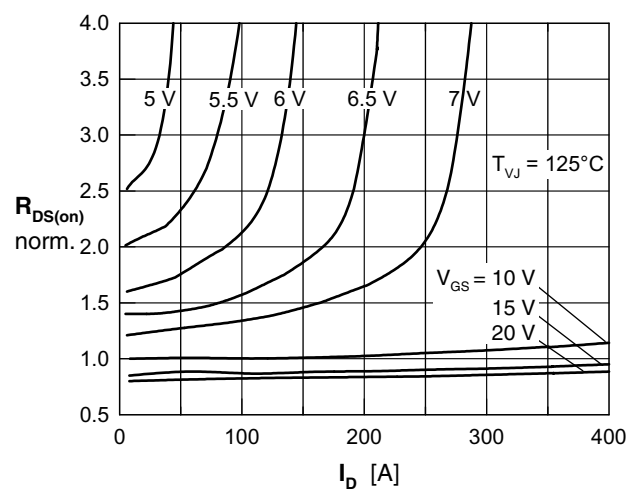


Fig. 6 Typ. drain source on-state resistance $R_{DS(on)}$ versus I_D

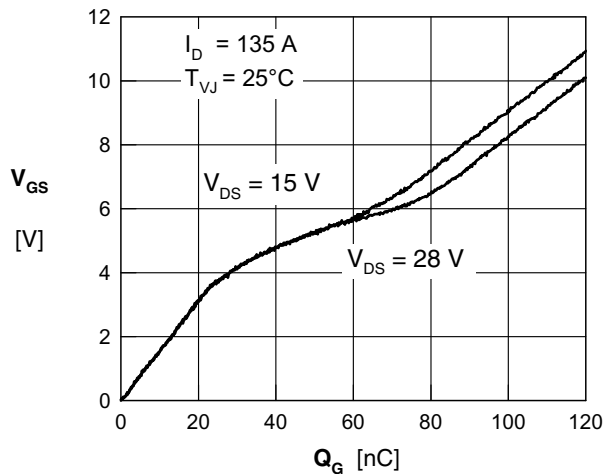


Fig. 7 Gate charge characteristics

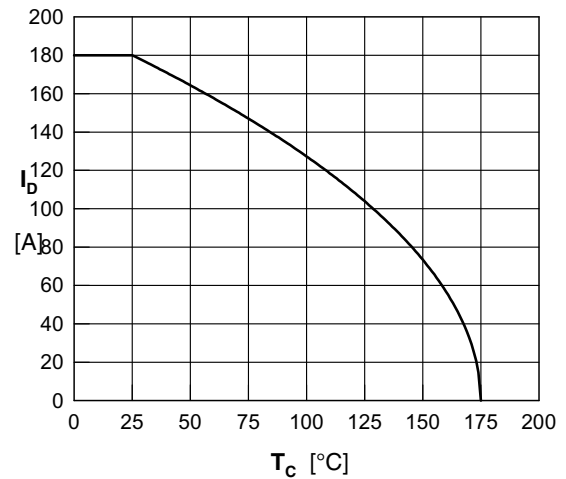


Fig. 8 Drain current I_D vs. temperature T_C

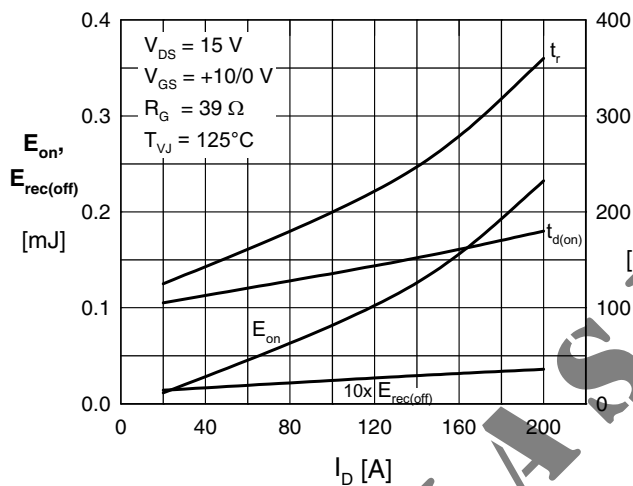


Fig. 9 Typ. turn-on energy & switching times vs. collector current, inductive switching

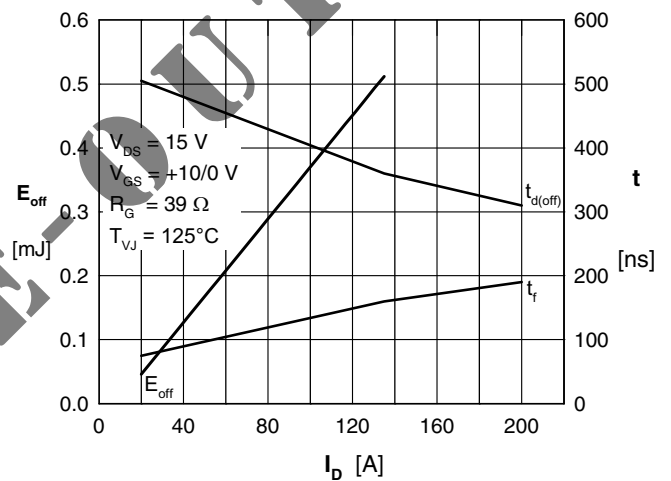


Fig. 10 Typ. turn-off energy & switching times vs. collector current, inductive switching

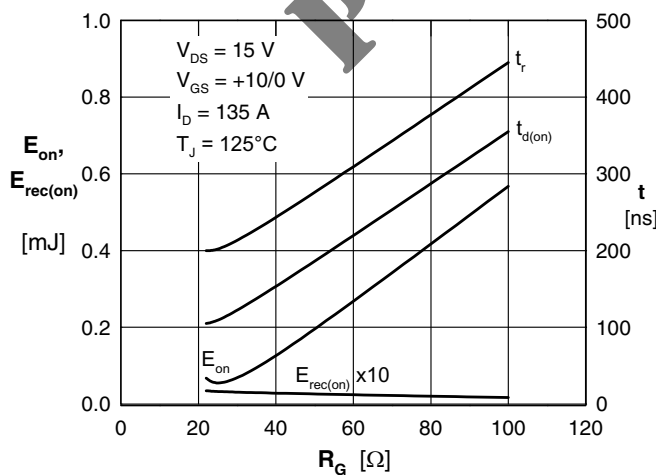


Fig. 11 Typ. turn-on energy & switching times vs. gate resistor, inductive switching






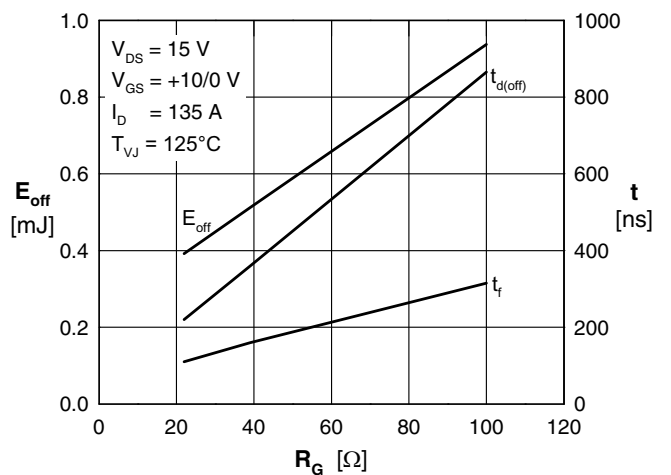


Fig. 12 Typ. turn-off energy & switching times vs. gate resistor, inductive switching

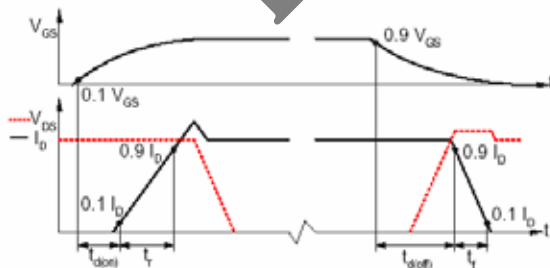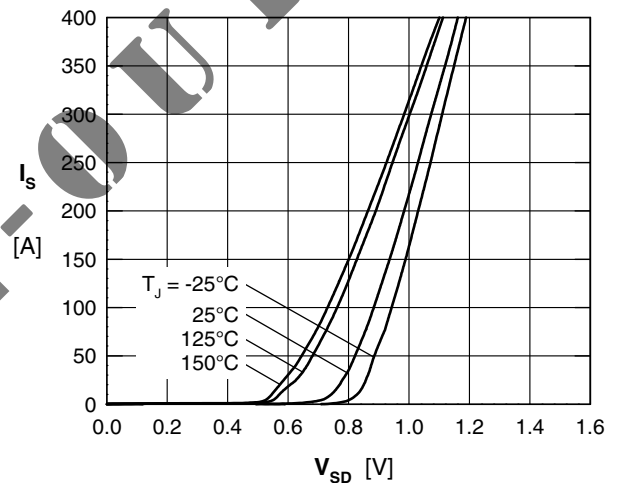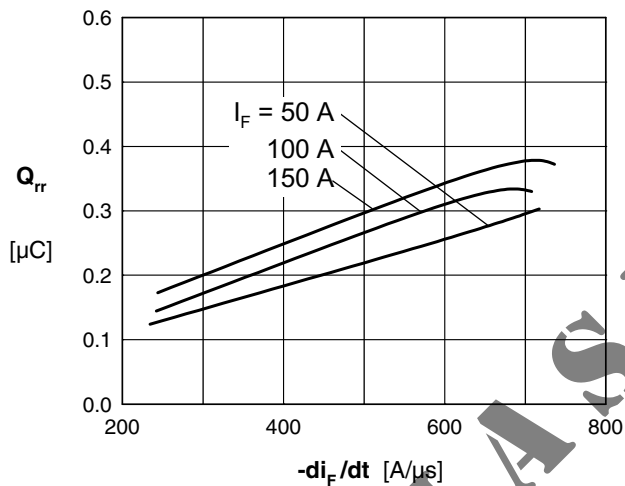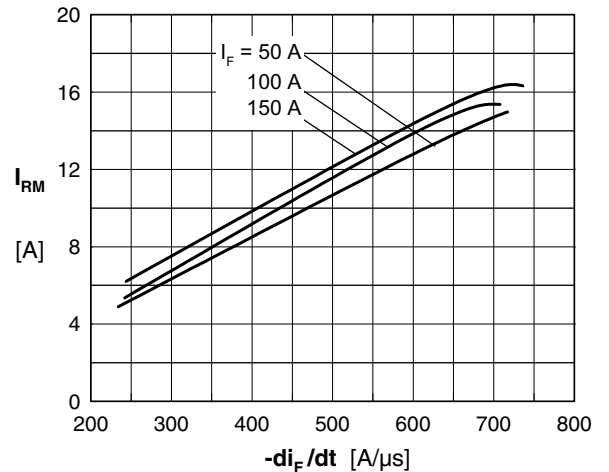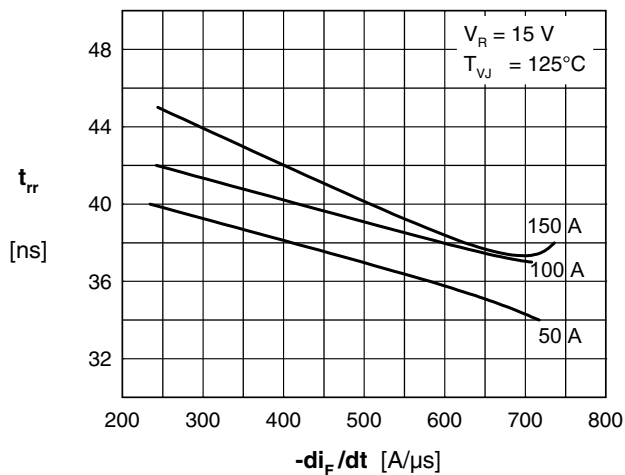

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com