



- Resists Snagging
- Prevents Damage From UV, Gasoline, Engine Chemicals And Salt
- Resists Cut, Abrasion And Penetration
- Flexible & Economical General Purpose Protection
- Deflects High Pressure Hose Ruptures
- Custom Lengths Available



Cut Cleanly  
Scissors

#### Material

Nylon

#### Grade

DFN

#### Wall Thickness

.045"

#### Drawing Number

TF001DF-WD

Put-Ups							
Nominal Size	Part #	Wall Thickness	Maxi Coil	Bulk Spool	Shop Spool	Available Colors	Lbs/100'
0.71"	DFN0.71BK	.045"	300'	100'	50'	Black	2.57
0.83"	DFN0.83BK	.045"	300'	100'	50'	Black	2.58
0.92"	DFN0.92BK	.045"	300'	100'	50'	Black	3.22
1.00"	DFN1.00BK	.045"	300'	100'	50'	Black	3.66
1.13"	DFN1.13BK	.045"	300'	100'	50'	Black	4.18
1.25"	DFN1.25BK	.045"	300'	100'	50'	Black	4.49
1.34"	DFN1.34BK	.045"	300'	100'	50'	Black	4.84
1.59"	DFN1.59BK	.045"	300'	100'	50'	Black	5.37
1.75"	DFN1.75BK	.045"	300'	100'	50'	Black	6.13
2.07"	DFN2.07BK	.045"	300'	100'	50'	Black	7.26
2.38"	DFN2.38BK	.045"	300'	100'	50'	Black	8.28
2.54"	DFN2.54BK	.045"	300'	100'	50'	Black	8.98
2.86"	DFN2.86BK	.045"	300'	100'	50'	Black	9.89
3.34"	DFN3.34BK	.045"	300'	50'	25'	Black	11.59
3.66"	DFN3.66BK	.045"	300'	50'	25'	Black	12.25

## Industrial Hose And Cable Protection For Harsh Environments


The tightly woven Nylon® makes DF the perfect solution for hose & cable protection. The .045 inch wall thickness will protect cables, hoses and ropes from weather, sunlight and abrasion damage.

When installed over uncoated cable or chains, DF will prevent scraping, chafing and contact damage to painted or other fragile surfaces. DF is resistant to chemicals, UV damage and rot, and is suitable for continuous outdoor use under all weather conditions.

The flexible sleeving cuts with a scissor and the tight construction slides easily over any application.

This is a non-expandable product. Be sure to match your application diameter accurately.

Colors Available:  
Black (BK)

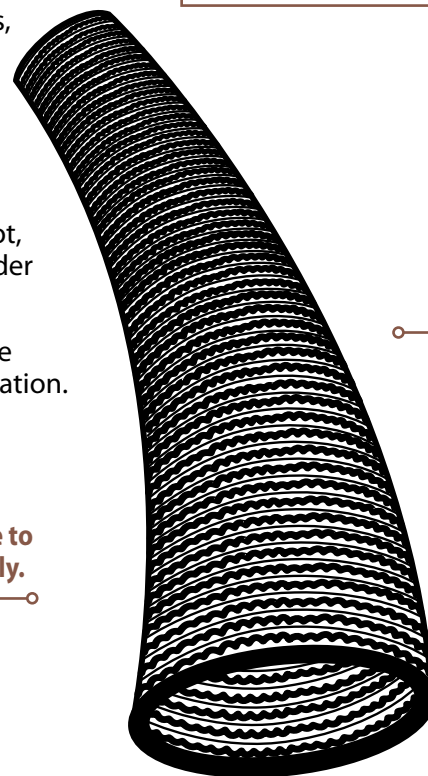

**TECHFLEX**  
Braided Sleeving Products

[www.techflex.com](http://www.techflex.com)

800.323.5140 • 973.300.9242 • fax: 973.300.9409  
104 Demarest Road • Sparta, NJ 07871

Nylon® is a registered trademark of DuPont Corporation.

ISO  
6945 MSHA





## ABRASION

**Abrasion Resistance**  
**High**

**Abrasion Test Machine**  
**Taber 5150**

**Abrasion Test Wheel**  
**Calibrase H-18**

**Abrasion Test Load**  
**500g**

**Room Temperature**  
**80°F**

**Humidity**  
**70%**

**Visible Wear And Some**  
**Pulling Of Fibers**  
**500 Test Cycles**

**Further Wear And Some**  
**Pulling At Seam**  
**550 Test Cycles**

**Material Wearing**  
**Through At Seam**  
**2,750 Test Cycles**

**Material Destroyed**  
**3,500 Test Cycles**

**Pre-Test Weight**  
**7,191.6 mg**

**Post-Test Weight**  
**6,680.7 mg**

**Test End Loss Of Mass**  
**Point Of Destruction**  
**510.9 mg**

## CHEMICAL RESISTANCE


1=No Effect      4=More Affected  
2=Little Effect    5=Severely Affected  
3=Affected

Aromatic Solvents	1
Aliphatic Solvents	1
Chlorinated Solvents	1
Weak Bases	1
Salts	1
Strong Bases	2
Salt Water 0-S-1926	1
Hydraulic Fluid MIL-H-5606	1
Lube Oil MIL-L-7808	1
De-Icing Fluid MIL-A-8243	1
Strong Acids	5
Strong Oxidants	5
Esters/Ketones	1
UV Light	2
Petroleum	3
Fungus ASTM G-21	2
Halogen Free	Yes
RoHS	Yes

**Melt Point**  
*ASTM D-2117*  
**410°F (210°C)**

**Maximum Continuous**  
*Mil-I-23053*  
**248°F (120°C)**

**Minimum Continuous**  
**-49°F (-45°C)**

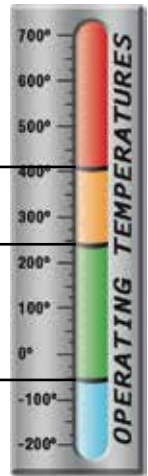

## PHYSICAL PROPERTIES

Monofilament Diameter	NA
<i>ASTM D-204</i>	
Recommended Cutting	Scissor
Colors	1
Wall Thickness	.045
Specific Gravity ASTM D-792	1.14
Moisture Absorption	2.7
<i>% ASTM D-570</i>	
Hard Vacuum Data	
<i>ASTM E-595 at 10-5 torr</i>	
TML	1.10
CVCM	.01
WVR	.69
Outgassing	High
Oxygen Index	22
<i>ASTM D-2863</i>	

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
Email      amall@ameya360.com  
QQ         800077892  
Skype      ameyasales1 ameyasales2

➤ Customer Service :

Email      service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
Email      mkt@ameya360.com