

# "High Frequency Ceramic Solutions"

## 2.45 GHz Band Pass Filter

P/N 2450BP41D100A

Detail Specification


02/12/2003 Page 1 of 2

Part Number	Frequency (MHz)	Insertion Loss	Attenuation (min.)	Return Loss	Ripple
2450BP41D100A	2450 ± 50	2.3 dB max	40 dB @ 1.2 - 1.8 GHz 30 dB @ 2.1 GHz 12 dB @ 2.2 GHz 35 dB @ 4.8 - 5.0 GHz	9.5 dB min.	0.7 dB max.

Input Power	Group Delay	Impedance	Operating Temperature Range
500 mWatt max	5 nsec max	50 Ω	-40 to +85°C


### Mechanical Dimensions

	L	W	T	a	b	c
Inches	0.126 ± .008	0.098 ± .008	0.059 ± .004	0.016 ± .008	0.024 ± .008	0.012 ± .006
mm	3.2 ± 0.2	2.5 ± 0.2	1.5 ± 0.1	0.4 ± 0.2	0.6 ± 0.2	0.30 ± 0.15

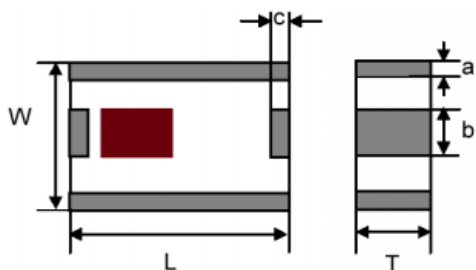

### Terminal Configuration

No.	Function	No.	Function
1	GND	3	GND
2	OUT	4	IN

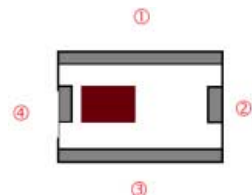


### Mounting Considerations

Pats should be mounted with colored side facing UP.

Line width should be designed to provide 50Ω impedance matching characteristics.

Units: mm

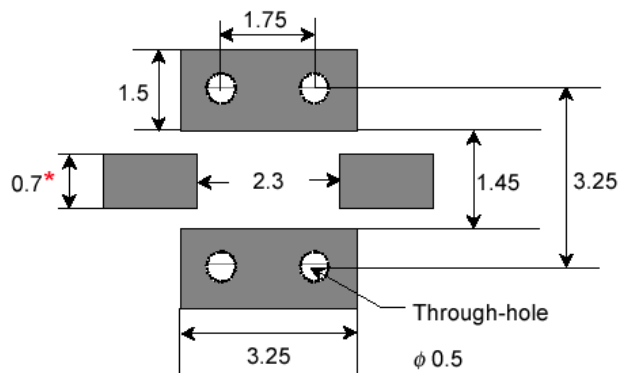

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.


# “High Frequency Ceramic Solutions”

## 2.45 GHz Band Pass Filter

Detail Specification

P/N 2450BP41D100A

02/12/2003 Page 1 of 2

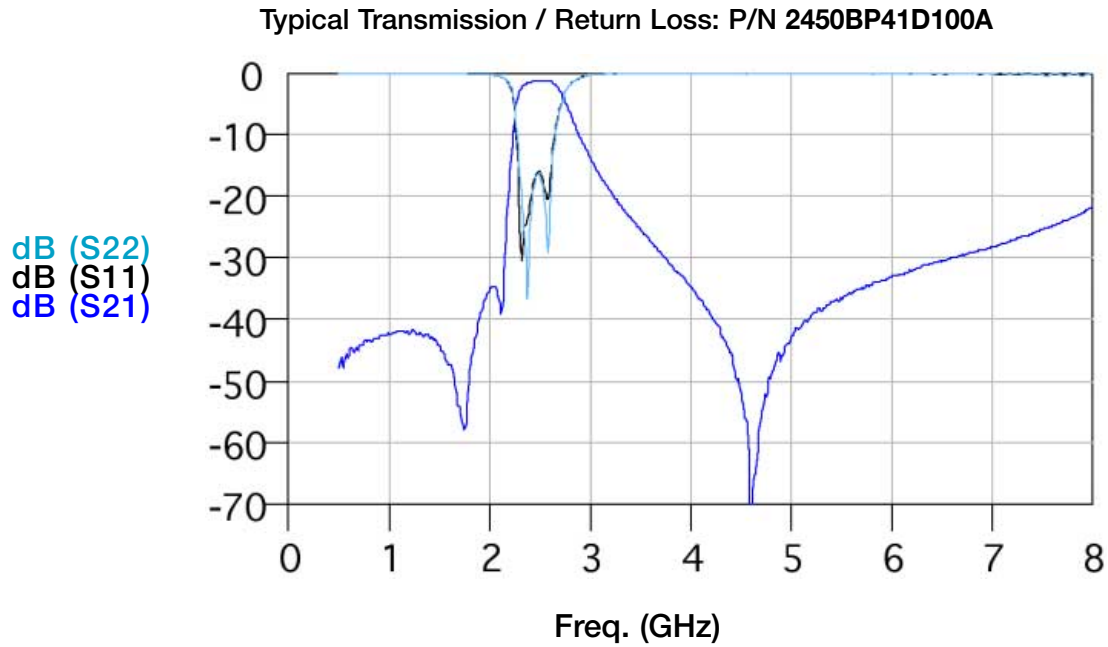

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)