


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

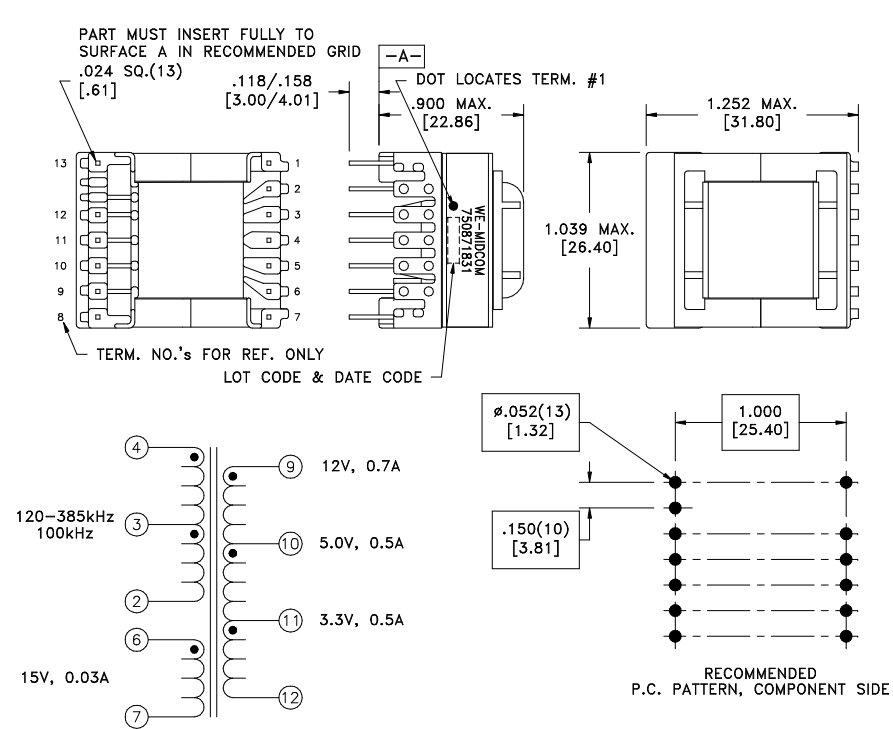

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	4-2	@20°C
D.C. RESISTANCE	6-7	@20°C
D.C. RESISTANCE	9-10	@20°C
D.C. RESISTANCE	10-11	@20°C
D.C. RESISTANCE	11-12	@20°C
INDUCTANCE	4-2	10kHz, 100mVAC, Ls
LEAKAGE INDUCTANCE	4-2	tie(6+7+9+10+11+12), 10kHz, 100mVAC, Ls
DIELECTRIC	2-12	tie(4+6), 4500VAC, 1 second
DIELECTRIC	4-6	1800VAC, 1 second
URNS RATIO		(4-2):(6-7)
URNS RATIO		(4-2):(9-10)
URNS RATIO		(4-2):(10-11)
URNS RATIO		(4-2):(11-12)

REV.	DATE
6A	2/10

Packaging Specifications Method: Tray PKG-0504 www.midcom-inc.com	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.001 [.03]	DRAWING TITLE TRANSFORMER eiSos p/n: 750871831	 www.midcom-inc.com	DRAWING NO. 750871831	
	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.			REVISIONS: SEE SHEET 1	SCALE ---

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com