International
IOR Rectifier

PD- 95675

IRLMS2002PbF

HEXFET® Power MOSFET

- Ultra Low On-Resistance
- N-Channel MOSFET
- Surface Mount
- Available in Tape & Reel
- 2.5V Rated
- Lead-Free



Top View

V_{DSS} = 20V

$R_{DS(on)}$ = 0.030Ω

Description

These N-Channel MOSFETs from International Rectifier utilize advanced processing techniques to achieve the extremely low on-resistance per silicon area. This benefit provides the designer with an extremely efficient device for use in battery and load management applications.

The Micro6™ package with its customized leadframe produces a HEXFET® power MOSFET with $R_{DS(on)}$ 60% less than a similar size SOT-23. This package is ideal for applications where printed circuit board space is at a premium. It's unique thermal design and $R_{DS(on)}$ reduction enables a current-handling increase of nearly 300% compared to the SOT-23.

Micro6™

Absolute Maximum Ratings

	Parameter	Max.	Units
V_{DS}	Drain- Source Voltage	20	V
I_D @ T_A = 25°C	Continuous Drain Current, V_{GS} @ 4.5V	6.5	A
I_D @ T_A= 70°C	Continuous Drain Current, V_{GS} @ 4.5V	5.2	
I_{DM}	Pulsed Drain Current ①	20	
P_D @T_A = 25°C	Power Dissipation	2.0	W
P_D @T_A = 70°C	Power Dissipation	1.3	
	Linear Derating Factor	0.016	W/°C
V_{GS}	Gate-to-Source Voltage	± 12	V
T_J, T_{STG}	Junction and Storage Temperature Range	-55 to + 150	°C

Thermal Resistance

	Parameter	Max.	Units
$R_{\theta JA}$	Maximum Junction-to-Ambient③	62.5	°C/W

1/18/05

Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)DSS}$	Drain-to-Source Breakdown Voltage	20	——	——	V	V_{GS} = 0V, I_D = 250μA
$\Delta V_{(BR)DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	——	0.016	——	V/°C	Reference to 25°C, I_D = 1mA
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	——	——	0.030	Ω	V_{GS} = 4.5V, I_D = 6.5A ②
		——	——	0.045		V_{GS} = 2.5V, I_D = 5.2A ②
$V_{GS(th)}$	Gate Threshold Voltage	0.60	——	1.2	V	V_{DS} = V_{GS}, I_D = 250μA
g_{fs}	Forward Transconductance	13	——	——	S	V_{DS} = 10V, I_D = 6.5A
I_{DSS}	Drain-to-Source Leakage Current	——	——	1.0	μA	V_{DS} = 16V, V_{GS} = 0V
		——	——	25		V_{DS} = 16V, V_{GS} = 0V, T_J = 70°C
I_{GSS}	Gate-to-Source Forward Leakage	——	——	-100	nA	V_{GS} = -12V
	Gate-to-Source Reverse Leakage	——	——	100		V_{GS} = 12V
Q_g	Total Gate Charge	——	15	22	nC	I_D = 6.5A
Q_{gs}	Gate-to-Source Charge	——	2.2	3.3		V_{DS} = 10V
Q_{gd}	Gate-to-Drain ("Miller") Charge	——	3.5	5.3		V_{GS} = 5.0V ②
$t_{d(on)}$	Turn-On Delay Time	——	8.5	——	ns	V_{DD} = 10V
t_r	Rise Time	——	11	——		I_D = 1.0A
$t_{d(off)}$	Turn-Off Delay Time	——	36	——		R_G = 6.0Ω
t_f	Fall Time	——	16	——		R_D = 10Ω ②
C_{iss}	Input Capacitance	——	1310	——	pF	V_{GS} = 0V
C_{oss}	Output Capacitance	——	150	——		V_{DS} = 15V
C_{rss}	Reverse Transfer Capacitance	——	36	——		ƒ = 1.0MHz

Source-Drain Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	——	——	2.0	A	MOSFET symbol showing the integral reverse p-n junction diode. 
I_{SM}	Pulsed Source Current (Body Diode) ①	——	——	20		
V_{SD}	Diode Forward Voltage	——	——	1.2	V	T_J = 25°C, I_S = 1.7A, V_{GS} = 0V ②
t_{rr}	Reverse Recovery Time	——	19	29	ns	T_J = 25°C, I_F = 1.7A
Q_{rr}	Reverse Recovery Charge	——	13	20	nC	di/dt = 100A/μs ②

Notes:

① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 11)

② Pulse width ≤ 400μs; duty cycle ≤ 2%.

③ Surface mounted on FR-4 board, t ≤ 5sec.

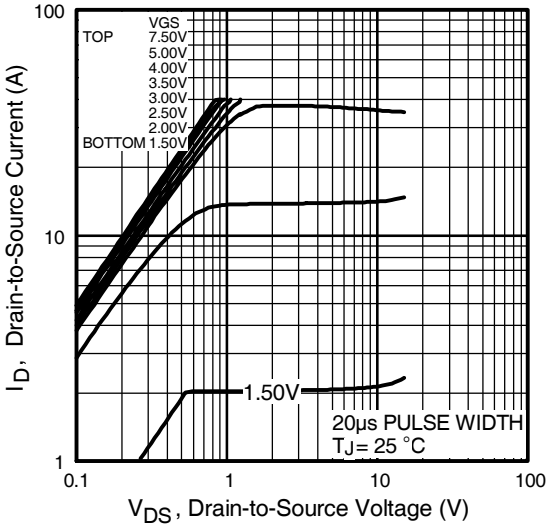

Fig 1. Typical Output Characteristics

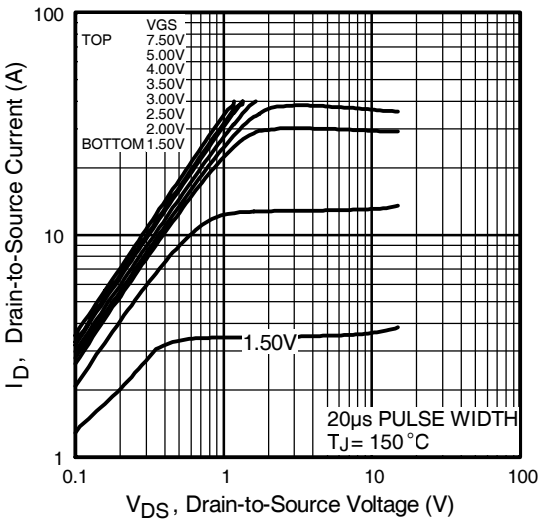

Fig 2. Typical Output Characteristics

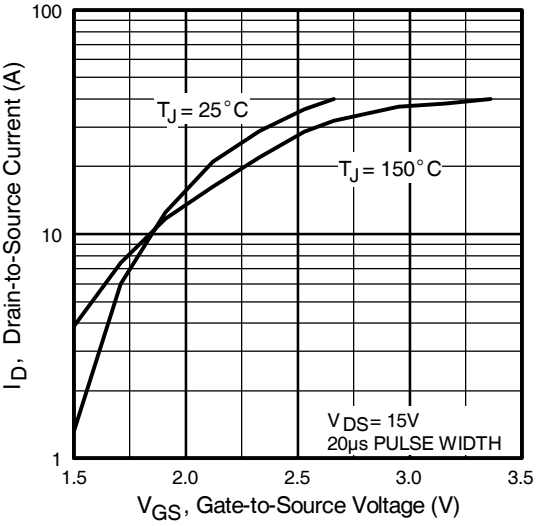

Fig 3. Typical Transfer Characteristics

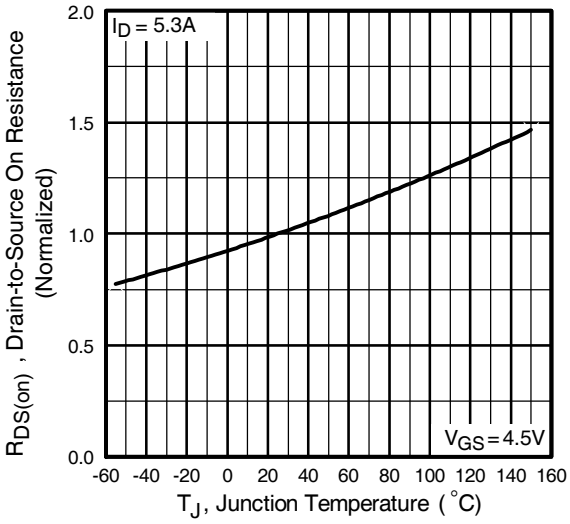

Fig 4. Normalized On-Resistance Vs. Temperature

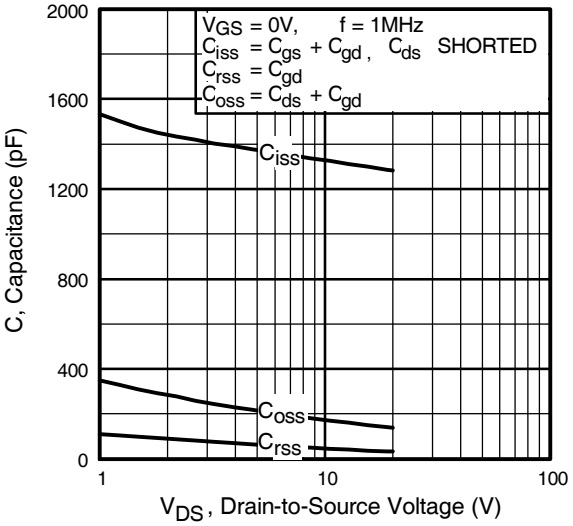

Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

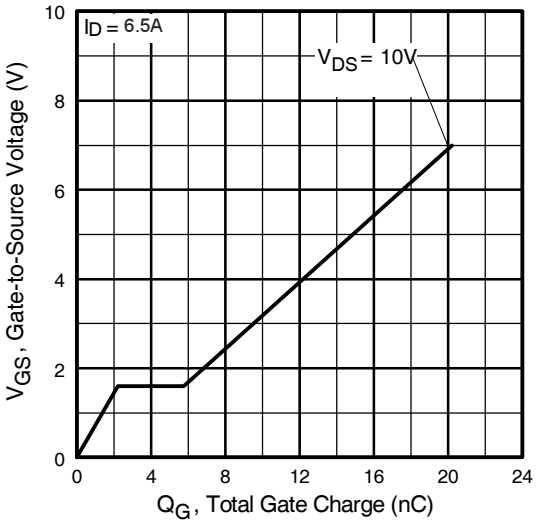

Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

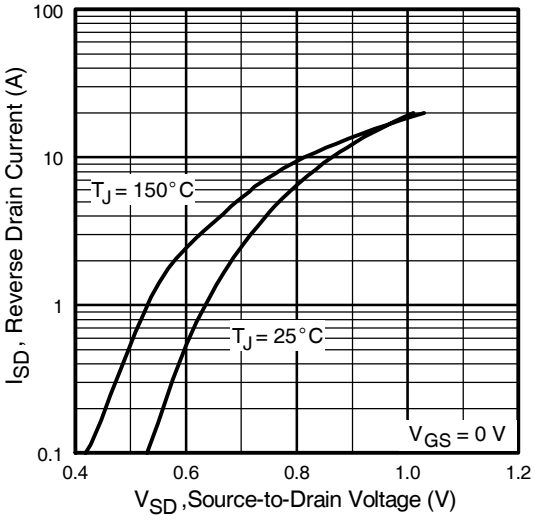

Fig 7. Typical Source-Drain Diode Forward Voltage

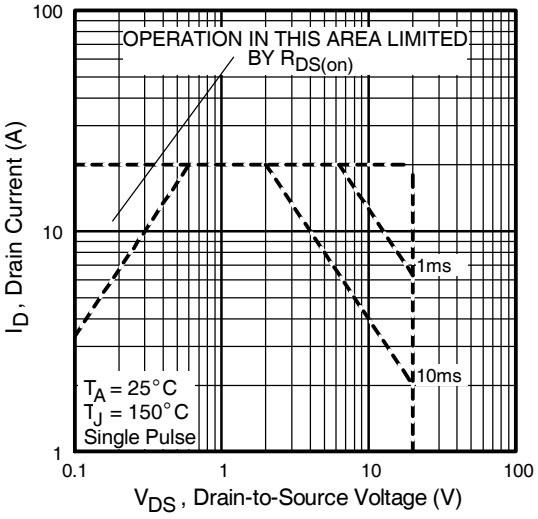

Fig 8. Maximum Safe Operating Area

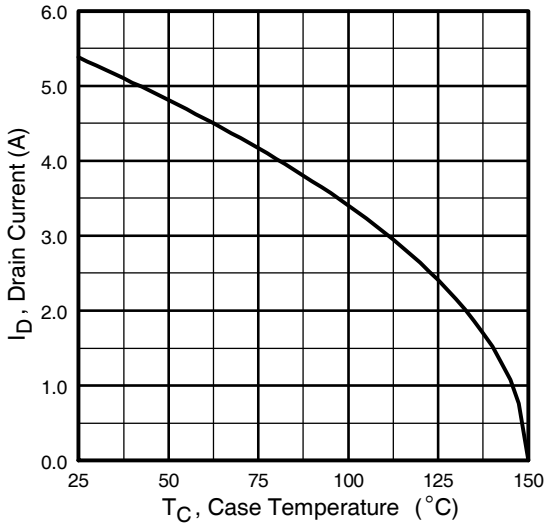

Fig 9. Maximum Drain Current Vs. Case Temperature

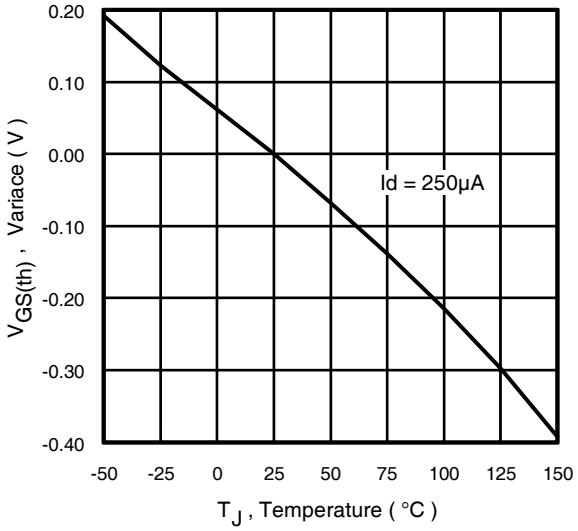

Fig 10. Typical Vgs(th) Variance Vs. Juction Temperature

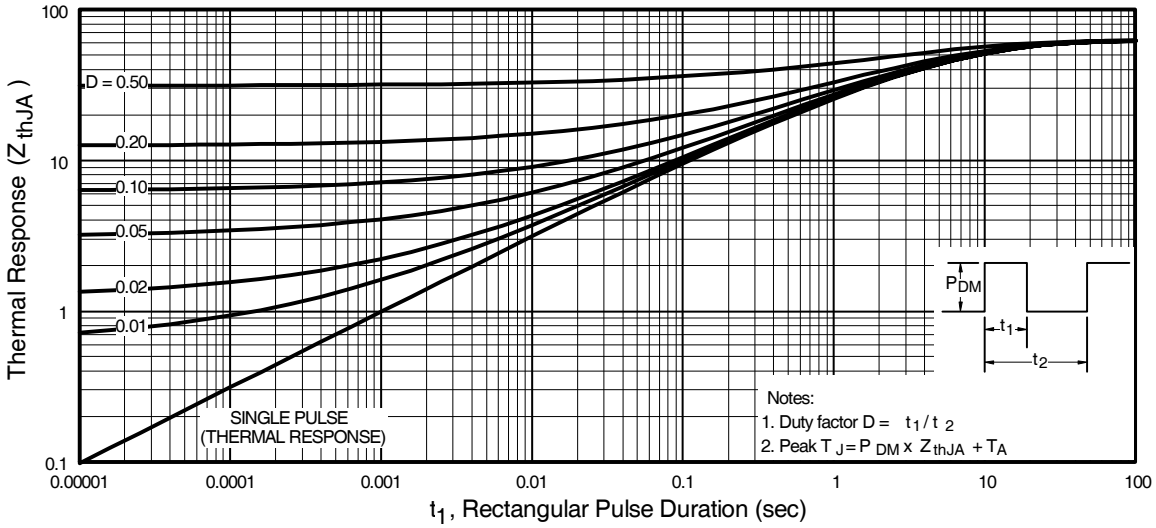

Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

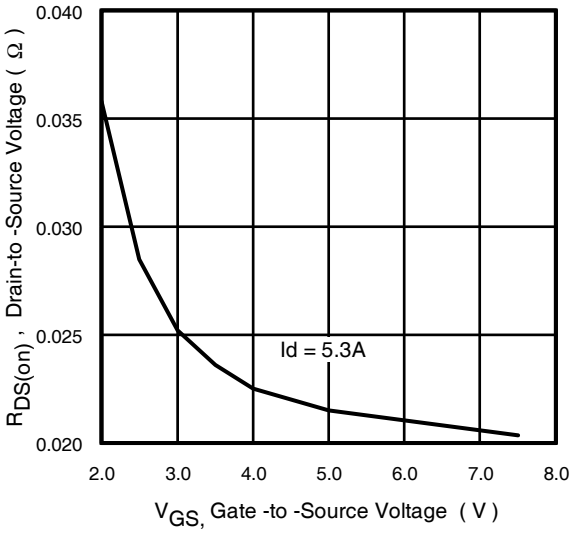

Fig 12. Typical On-Resistance Vs. Gate Voltage

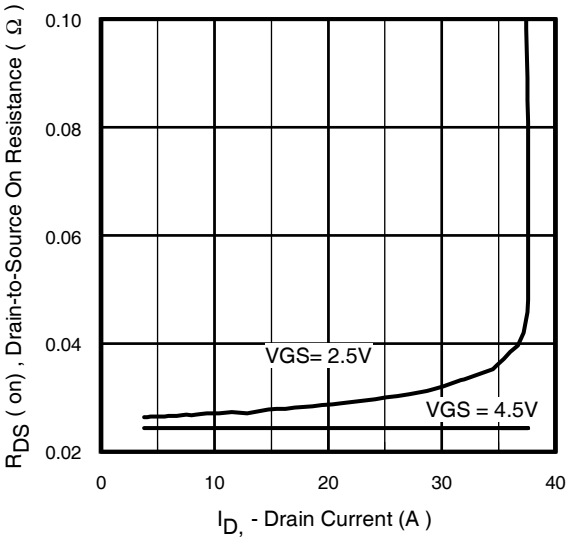

Fig 13. Typical On-Resistance Vs. Drain Current

Micro6 (SOT23 6L) Package Outline

Dimensions are shown in milimeters (inches)

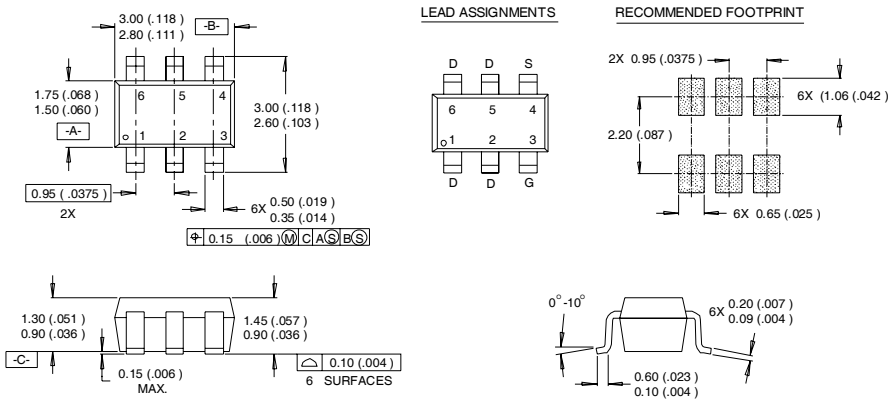

NOTES :
1. DIMENSIONING & TOLERANCING PER ANSI Y14.5M-1982.
2. CONTROLLING DIMENSION : MILLIMETER.
3. DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).

Micro6™ |

Micro6 (SOT23 6L) Part Marking Information

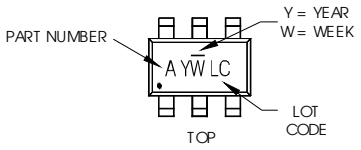

PART NUMBER CODE REFERENCE:

A = IRLMS1902
B = IRLMS1503
C = IRLMS6702
D = IRLMS5703
E = IRLMS6802
F = IRLMS4502
G = IRLMS2002
H = IRLMS6803

Note: A line above the work week (as shown here) indicates Lead-Free.

W = (1-26) IF PRECEDED BY LAST DIGIT OF CALENDAR YEAR

YEAR	Y	WORK WEEK	W
2001	1	01	A
2002	2	02	B
2003	3	03	C
2004	4	04	D
2005	5		
2006	6		
2007	7		
2008	8		
2009	9		
2010	0	24	X
		25	Y
		26	Z

W = (27-52) IF PRECEDED BY A LETTER

YEAR	Y	WORK WEEK	W
2001	A	27	A
2002	B	28	B
2003	C	29	C
2004	D	30	D
2005	E		
2006	F		
2007	G		
2008	H		
2009	J		
2010	K	50	X
		51	Y
		52	Z

Micro6 Tape & Reel Information

Dimensions are shown in milimeters (inches)

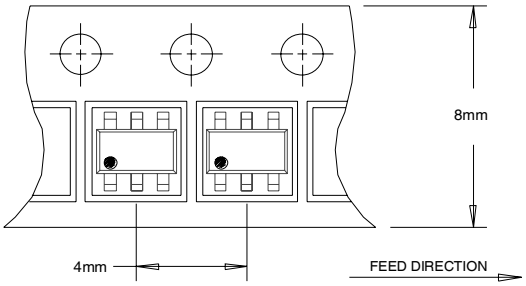

NOTES :
1. OUTLINE CONFORMS TO EIA-481 & EIA-541.

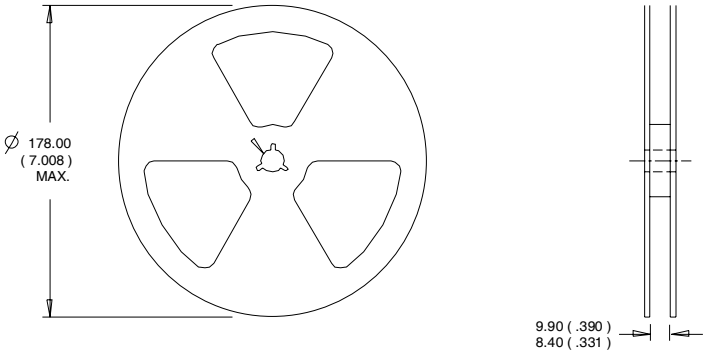

NOTES:
1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

This product has been designed and qualified for the consumer market.
Qualification Standards can be found on IR's Web site.
Data and specifications subject to change without notice.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903
Visit us at www.irf.com for sales contact information.
Data and specifications subject to change without notice. 01/05

AMEYA360
Components Supply Platform

Authorized Distribution Brand :

Website :

Welcome to visit www.ameya360.com

Contact Us :

- ## Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

- ## Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

- ## Customer Service :

Email service@ameya360.com

- ## Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com