

TACT
SWITCHESNAVIGATION
SWITCHESPUSHBUTTON
SWITCHESTOGGLE
SWITCHESROCKER
SWITCHESSLIDE
SWITCHESSNAP-ACTION
SWITCHESDIP
SWITCHESKEYLOCK
SWITCHESROTARY
SWITCHESDETECTOR
SWITCHESCAP
OPTIONS

SERIES 200B SWITCHES

TOGGLE SWITCHES - SMT SUB-MINIATURE



FEATURES & BENEFITS

- Variety of switching functions
- Sub-miniature
- Surface mount
- Sealed to IP67

APPLICATIONS/MARKETS

- Telecommunications
- Instrumentation
- Networking
- Medical equipment

SPECIFICATIONS

Contact Rating:	0.4 VA max. @ 20 VAC or DC max.
Life Expectancy:	50,000 make-and-break cycles at full load
Contact Resistance:	20 mΩ I _{max} initial @ 2-4 VDC 100 mA
Insulation Resistance:	1,000 MΩ I _{min} .
Dielectric Strength:	1,000 V RMS @ sea level
Operating Temperature:	-30° C to 85° C
Packaging:	Tape & Reel

MATERIALS

Case & Bushing:	High temp material, glass filled 4/6 Nylon, flame retardant, heat stabilized (UL94-V0)
Actuator:	Brass, chrome plated with internal O-ring seal standard
Switch Support:	Brass/Steel
Contacts / Terminals:	Gold plate over nickel plated copper alloy
Terminal Seal:	Epoxy



HOW TO ORDER



SERIES	MODEL NO.	ACTUATOR	BUSHING	TERMINATION	CONTACT MATERIAL	SEAL
200B	WMSP3 WMSP4 WMSP5	T2	A1	SM6	R = Gold Q = Silver	E = Epoxy Sealed at Base of Terminal



Example Ordering Number

200B-WMSP3-T2-A1-SM6-R-E

Specifications subject to change without notice.

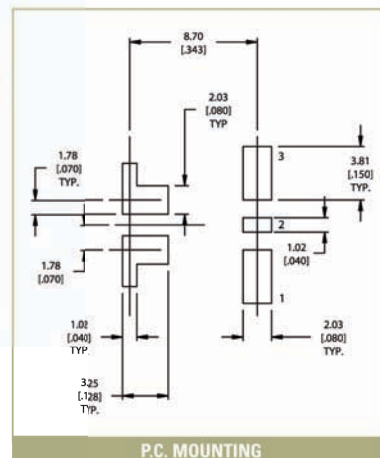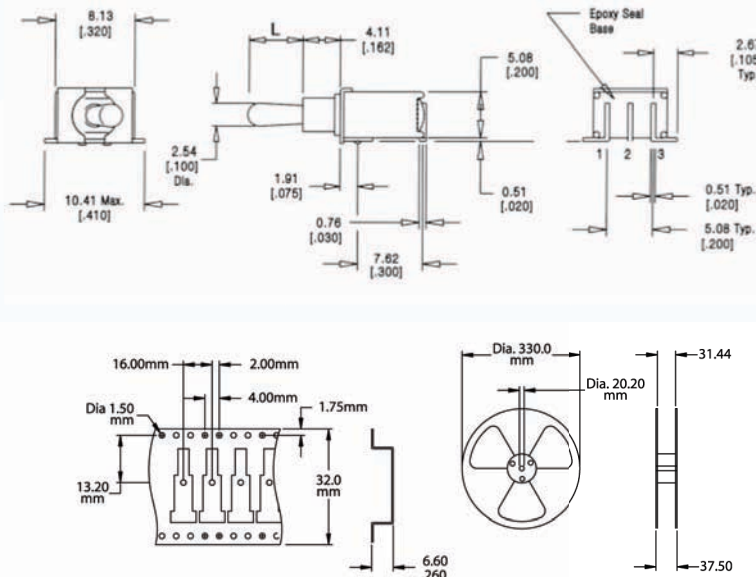

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com